AIP BAHRAIN FIR GEN 0.1-1
17 SEP 15

PART 1 - GENERAL (GEN)

GEN 0.

GEN 0.1 PREFACE

0.1.1 NAME OF PUBLISHING AUTHORITY

The AIP BAHRAIN FIR is published by the authority of Civil Aviation Affairs of the Kingdom of Bahrain and the Civil Aviation Authority of the State of Qatar.

0.1.2 APPLICABLE ICAO DOCUMENTS

The AIP is prepared in accordance with the Standards and Recommended Practices (SARPS) of Annex 15 to Chicago Convention and the Aeronautical Information Services Manual (ICAO Doc 8126 - AN 872). Charts contained in the AIP are produced in accordance with Annex 4 to the Chicago Convention and the Aeronautical Chart Manual (ICAO Doc 8697 - AN 889). Differences from ICAO Standards, Recommended Practices and Procedures are given in section **GEN 1.7**.

0.1.3 PUBLICATION MEDIA

See GEN 3.1.3.2.

0.1.4 THE AIP STRUCTURE AND ESTABLISHED REGULAR AMENDMENT INTERVAL

0.1.4.1 The AIP structure

The AIP forms part of the Integrated Aeronautical Information Package of which details are given in Section **GEN 3.1**. The principal structure is shown in graphic form at the end of this GEN 0.1subsection.

The AIP is the basic aeronautical information document for the BAHRAIN FIR / BAHRAIN UIR, and contains lasting information essential to air navigation. For other details reference should be made to the AIP of the State concerned.

The AIP is divided into three Parts, General (GEN), En-route (ENR) and Aerodromes (AD), each divided into sections and subsections containing various types of information subjects.

Note: the electronic AIP BAHRAIN FIR (see **GEN 3.1.3.1**) may not include certain subsections listed hereafter which are not relevant for an electronic AIP. These subsections are marked as underlined.

0.1.4.1.1 Part 1 General (GEN)

Part 1 consists of the five sections containing information as briefly described hereafter.

GEN 0

Preface; Record of AIP Amendments; <u>Record of AIP Supplements: Checklist of AIP pages: List of hand amendments to the AIP:</u> and the Table of Contents to Part 1.

GEN 1. National regulations and requirements

Designated authorities; Entry, transit and departure of aircraft; Entry, transit and departure of passengers and crew; Entry, transit and departure of cargo; Aircraft instruments, equipment and flight documents; summary of national regulations and international agreements / conventions; and Differences from ICAO Standards, Recommended Practices and Procedures for the Kingdom of Bahrain and the State of Qatar.

GEN 2. Tables and codes

Measuring system, aircraft markings, holidays; Abbreviations used in AIS publications; Chart symbols; Location indicators; List of radio navigation aids; Conversion tables; and Sunrise / Sunset tables.

GEN 3. Services

Aeronautical information services; Aeronautical charts; Air traffic services; Communication services; Meteorological services; and rescue.

GEN 4. Charges for aerodromes / heliports and air navigation services

Aerodrome / heliport charges; and Air navigation services charges.

0.1.4.1.2 Part 2 En - route (ENR)

Part 2 consists of seven sections containing information as briefly described hereafter.

ENR 0.

GEN 0.1-2 AIP BAHRAIN FIR 17 AUG 17

Preface; Record of Amendments; Record of AIP Supplements; Check list of AIP pages; List of hand amendments to the AIP; <u>and the Table of Content to Part 2</u>.

ENR 1. General rules and procedures

General rules; Visual flight rules; Instrument flight rules; ATS airspace classification; Holding, approach and departure procedures; Radar services and procedures; Altimeter setting procedures; Regional supplementary procedures; Air traffic flow management; Flight planning; Addressing of flight plan messages; Interception of civil aircraft; Unlawful interference; and Air traffic incidents.

ENR 2. Air traffic services airspace

Detailed description of:

Flight information regions (FIR), Upper flight information regions (UIR), Terminal control areas (TMA); and other regulated airspace.

ENR 3. ATS routes

Detailed description of:

Lower ATS routes; Upper ATS routes; Area navigation routes; Helicopter routes; other routes; and En-route holding.

Note: Other types of routes which are specified in connection with procedures for traffic to and from aerodromes / heliports are described in the relevant section of the Part 3 Aerodromes.

ENR 4. Radio navigation aids / systems

Radio navigation aids en-route; Special navigation systems; Global navigation satellite system, Name-code designators for significant points; and Aeronautical ground lights en -route.

ENR 5. Navigation Warnings

Prohibit, restricted and danger areas; Military exercise and training areas; Other activities of dangerous nature; Air navigation obstacles enroute; Aerial sporting and recreational activities; and Wildlife Management and areas with sensitive fauna.

ENR 6. En - route charts

En-route Chart ICAO and index charts.

0.1.4.1.3 Part 3 Aerodromes (AD)

Part 3 consists of four sections containing information as briefly described hereafter.

AD 0.

Preface; Record of AIP Amendments; Record of AIP Supplements; Check list of AIP pages; List of hand amendments to the AIP; and the Table of Contents to Part 3.

AD 1. Aerodromes / Heliports Introduction

Aerodrome / heliport availability; Rescue and Fire fighting services and snow plan; Index to aerodromes and heliports, Grouping of aerodromes / heliports, Status of certification of aerodromes.

AD 2. Aerodromes

Detailed information about aerodromes, including helicopter landing areas, if located at the aerodromes.

AD 3. Heliports

Detailed Information about heliports (not located at aerodromes).

0.1.4.2 Regular amendment Interval

The AIP BAHRAIN FIR will be updated on regular basis according the AIRAC dates as published in **GEN 3.1.4.2**. Whenever an AIRAC AMDT is published a trigger NOTAM will be issued by at least three days prior to effective date. This NOTAM will give a brief description of the AIRAC's content and shall come into effect on the same date of the AIRAC.

0.1.5 COPYRIGHT POLICY

To be developed

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 0.1-3
2 MAR 17

0.1.6 SERVICES TO CONTACT IN CASE OF DETECTED AIP ERRORS OR OMISSIONS

The AIP BAHRAIN FIR and associated NOTAM are compiled from a variety of sources. Except for Kingdom of Bahrain, all information is acquired from indepent states and from commercial sources. The greatest care is exercised in the assembly and compilation of information for the AIP BAHRAIN FIR and associated NOTAM and they are considered to be as reliable as possible at the time of issue. Civil Aviation Affairs will not be held responsible, however, for the accuracy of the content of the AIP or NOTAM or for any omissions therefrom, neither will Civil Aviation Affairs be responsible for the adequacy or receipt of NOTAM or AIP amendments.

Any errors and omissions which may nevertheless be detected, as well as any correspondence concerning the Integrated Aeronautical Information Package, should be referred to:


Aeronautical Information Management Static Data Coordinator (SDC) Kingdom of Bahrain Civil Aviation Affairs P.O. Box 586 TEL: +973 17329037

TEL: +973 17329037 Telefax:+973 17321025 e-mail: sdc@mtt.gov.bh

Bahrain International NOTAM Office Kingdom of Bahrain Civil Aviation Affairs P.O. Box 586 TEL: +973 17321180 / 1 / 2

TEL: +973 17321180 / 1 / 2 Telefax:+973 17323876 AFS: OBBBYNYX

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

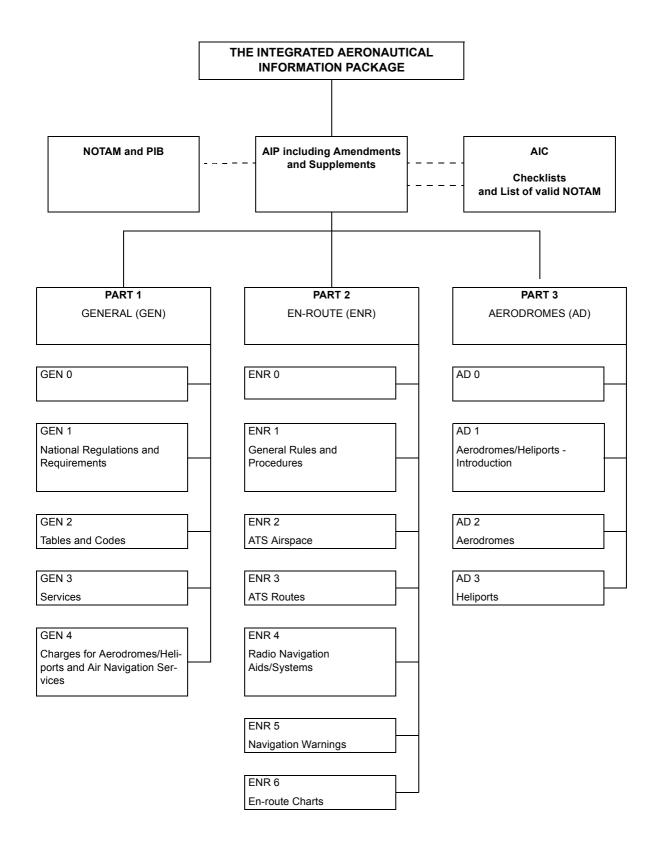

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

GEN 0.2 RECORD OF AIP AMENDMENTS

AIP AMENDMENT			AIRAC AIP AMENDMENT				
NR/ Year	Publication date	Date inserted	Inserted by	NR/ Year	Publication date	Effective date	Inserted by



AIP BAHRAIN FIR GEN 0.3-1 17 SEP 15

GEN 0.3 RECORD OF AIP SUPPLEMENTS

Not applicable.



AIP BAHRAIN FIR GEN 0.4-1 17 AUG 17

GEN 0.4 CHECKLIST OF AIP PAGES

Page	Date	
PART 1 - GEN GEN 0. 0.1-1 0.1-2 0.1-3 0.1-4 0.2-1 0.3-1 0.4-1 0.4-2 0.5-1	17 SEP 15 17 AUG 17 2 MAR 17 17 SEP 15 17 SEP 15 17 SEP 15 17 SEP 15 17 AUG 17 17 AUG 17 5 MAR 15 3 MAR 16	3.3 3.4 3.4 3.8 3.8 3.8 3.8 3.8 3.8 3.8
GEN 1. 1.1-1 1.1-2 1.1-3 1.2-1 1.2-2 1.2-3 1.2-4 1.2-5 1.2-6 1.2-7 1.2-8 1.3-1 1.4-1 1.4-2 1.5-1 1.5-2 1.6-1 1.7-1 1.7-2 1.7-3 1.7-4 1.7-5 1.7-6	17 SEP 15 2 MAR 17 17 SEP 15 2 MAR 17 17 SEP 15 2 MAR 17 17 SEP 15 2 MAR 17	GI 4 4 4 4 4 4 9 6 6
GEN 2. 2.1-1 2.1-2 2.2-1 2.2-2 2.3-1 2.4-1 2.5-1 2.6-1 2.6-2 2.6-3 2.6-4 2.6-5 2.6-6 2.6-7 2.6-8 2.6-9 2.7-1 2.7-2	17 SEP 15 17 SEP 15 17 SEP 15 17 SEP 15 17 AUG 17 17 SEP 15 2 MAR 17 17 SEP 15	1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0
GEN 3. 3.1-1 3.1-2 3.1-3 3.1-4 3.1-5 3.2-1 3.2-2 3.2-3 3.2-4 3.3-1	2 MAR 17 2 MAR 17 2 MAR 17 2 MAR 17 2 MAR 17 2 MAR 17 17 SEP 15 17 SEP 15 17 SEP 15 2 MAR 17	1.: 1.: 1.: 1.: 1.: 1.: 1.: 1.: 1.: 1.:

Page	 Date
3.3-2 3.3-3 3.4-1 3.4-2 3.5-1 3.5-2 3.5-3 3.5-4 3.6-1 3.6-2 3.6-3	10 NOV 16 2 MAR 17 17 SEP 15
GEN 4. 4.1-1 4.1-2 4.1-3 4.2-1 4.2-2	3 MAR 16 25 MAY 17 25 MAY 17 17 SEP 15 17 SEP 15
PART 2 - EN-ROUT	ΓE (ENR)
0.6-1 0.6-2	17 SEP 15 17 AUG 17
ENR 1. 1.1-1 1.2-1 1.2-2 1.3-1 1.3-2 1.3-3 1.3-4 1.4-1 1.4-2 1.4-3 1.4-4 1.4-5 1.5-1 1.5-2 1.6-1 1.6-2 1.6-3 1.6-4 1.6-5 1.6-6 1.6-7 1.6-8 1.6-9 1.7-1 1.7-2 1.7-3 1.8-1 1.8-2 1.9-1 1.10-1 1.10-2 1.10-3 1.10-4 1.10-5 1.10-6 1.10-7 1.11-1 1.12-1 1.12-2 1.12-3 1.13-1 1.14-1 1.14-2 1.14-3	17 SEP 15 3 MAR 16 3 MAR 16 25 MAY 17 17 SEP 15 25 MAY 17 17 SEP 15 25 MAY 17 17 SEP 15

Page	Date
1.14-4 1.14-5	17 SEP 15 17 SEP 15
1.14-6	17 SEP 15 17 SEP 15
1.14-7	17 SEP 15
ENR 2.	0.144.D.47
2.1-1 2.1-2	2 MAR 17 10 NOV 16
2.1-2	10 NOV 16
2.1-4	10 NOV 16
2.1-5	10 NOV 16
2.1-6	10 NOV 16
2.1-7 2.1-8	10 NOV 16 10 NOV 16
2.1-9	10 NOV 16
2.1-10	10 NOV 16
2.2-1	17 AUG 17
ENR 3.	0 MAD 47
3.1-1 3.1-2	2 MAR 17 2 MAR 17
3.1-2	2 MAR 17 2 MAR 17
3.1-4	2 MAR 17
3.1-5	2 MAR 17
3.1-6 3.1-7	2 MAR 17 2 MAR 17
3.1-8	2 MAR 17 2 MAR 17
3.1-9	2 MAR 17
3.1-10	2 MAR 17
3.1-11	2 MAR 17
3.1-12 3.1-13	2 MAR 17 2 MAR 17
3.1-13	2 MAR 17
3.1-15	2 MAR 17
3.1-16	2 MAR 17
3.1-17 3.1-18	2 MAR 17 2 MAR 17
3.1-19	2 MAR 17
3.1-20	2 MAR 17
3.1-21	2 MAR 17
3.1-22	2 MAR 17
3.1-23 3.1-24	2 MAR 17 2 MAR 17
3.1-25	2 MAR 17
3.1-26	2 MAR 17
3.1-27	2 MAR 17
3.1-28 3.1-29	2 MAR 17 2 MAR 17
3.1-29	2 MAR 17 2 MAR 17
3.1-31	2 MAR 17
3.1-32	2 MAR 17
3.1-33 3.1-34	2 MAR 17 2 MAR 17
3.1-34 3.1-35	2 MAR 17 2 MAR 17
3.1-36	2 MAR 17
3.2-1	17 SEP 15
3.3-1	2 MAR 17
3.3-2 3.3-3	2 MAR 17 17 AUG 17
3.3-4	2 MAR 17
3.3-5	2 MAR 17
3.3-6	2 MAR 17
3.3-7 3.3-8	2 MAR 17 2 MAR 17
3.3-8 3.3-9	2 MAR 17 2 MAR 17
3.3-10	2 MAR 17
3.3-11	2 MAR 17
3.3-12	2 MAR 17
3.3-13	2 MAR 17

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17

3.3-13

2 MAR 17

Page	Date	Page	Date	Page	Date
3.3-14	2 MAR 17			2-OBBI-59	25 MAY 17
3.3-15	2 MAR 17	AD 1.		2-OBBI-60	17 SEP 15
3.3-16	2 MAR 17	1.1-1	17 SEP 15	2-OBBI-61	17 SEP 15
3.3-17	2 MAR 17	1.1-2	10 NOV 16	2-OBBI-62	17 SEP 15
3.3-18	2 MAR 17	1.1-3	2 MAR 17	2-OBBI-63	17 SEP 15
3.3-19	2 MAR 17	1.1-4	10 NOV 16	2-OBBI-64	17 SEP 15
3.3-20	2 MAR 17	1.2-1	26 MAY 16	2-OBBI-65	17 SEP 15
3.3-21	2 MAR 17	1.3-1	17 SEP 15	2-OBBI-66	17 SEP 15
3.3-22	2 MAR 17	1.4-1	17 SEP 15	2-OBBI-67	17 SEP 15
3.3-23	2 MAR 17			2-OBBI-68	17 SEP 15
3.3-24	2 MAR 17	1.5-1	17 SEP 15	2-OBBI-69	25 MAY 17
3.3-25	2 MAR 17			2-OBBI-70	17 SEP 15
		AD 2.			
3.3-26	2 MAR 17	BAHRAIN INTEI	RNATIONAL	2-OBBI-71	25 MAY 17
3.3-27	2 MAR 17	2-OBBI-1	17 AUG 17	2-OBBI-72	17 SEP 15
3.3-28	2 MAR 17	2-OBBI-2	2 MAR 17	2-OBBI-73	17 SEP 15
3.3-29	2 MAR 17	2-OBBI-3	2 MAR 17	2-OBBI-74	17 SEP 15
3.3-30	2 MAR 17	2-OBBI-4	2 MAR 17	2-OBBI-75	25 MAY 17
3.3-31	2 MAR 17	2-OBBI-5	2 MAR 17	2-OBBI-76	17 SEP 15
3.3-32	2 MAR 17	2-OBBI-6	2 MAR 17	2-OBBI-77	25 MAY 17
3.3-33	2 MAR 17			2-OBBI-78	17 SEP 15
3.3-34	25 MAY 17	2-OBBI-7	2 MAR 17	2-OBBI-79	25 MAY 17
3.3-35	2 MAR 17	2-OBBI-8	2 MAR 17	2-OBBI-80	17 SEP 15
3.3-36	2 MAR 17	2-OBBI-9	2 MAR 17	2-OBBI-81	25 MAY 17
3.3-37	2 MAR 17	2-OBBI-10	2 MAR 17	2-OBBI-82	17 SEP 15
3.3-38	2 MAR 17 2 MAR 17	2-OBBI-11	17 SEP 15	2-OBBI-82 2-OBBI-83	25 MAY 17
3.3-36		2-OBBI-12	3 MAR 16		17 SEP 15
	2 MAR 17	2-OBBI-13	3 MAR 16	2-OBBI-84	11 SEP 15
3.3-40	2 MAR 17	2-OBBI-14	17 SEP 15		
3.3-41	2 MAR 17	2-OBBI-15	25 MAY 17	BAHRAIN / ISA	
3.3-42	2 MAR 17	2-OBBI-16	17 SEP 15	2-OBBS-1	17 AUG 17
3.4-1	17 SEP 15	2-OBBI-17	2 MAR 17	2-OBBS-2	17 AUG 17
3.5-1	17 SEP 15	2-OBBI-18	17 SEP 15	2-OBBS-3	17 AUG 17
3.6-1	26 MAY 16	2-OBBI-19	2 MAR 17	2-OBBS-4	17 AUG 17
		2-OBBI-20	17 SEP 15	2-OBBS-5	17 AUG 17
ENR 4.		2-OBBI-21	17 SEP 15	2-OBBS-6	17 AUG 17
4.1-1	17 SEP 15	2-OBBI-21	17 SEP 15	2-OBBS-7	17 SEP 15
4.2-1	17 SEP 15	2-OBBI-23	3 MAR 16	2-OBBS-8	17 SEP 15
4.3-1	17 SEP 15	2-OBBI-24	17 SEP 15	2-OBBS-9	17 SEP 15
4.4-1	26 MAY 16	2-OBBI-25	25 MAY 17	2-OBBS-10	17 SEP 15
4.4-2	18 AUG 16	2-OBBI-26	17 SEP 15	2-OBBS-11	17 AUG 17
4.4-3	25 MAY 17			2-OBBS-12	17 SEP 15
4.4-4	25 MAY 17	2-OBBI-27	25 MAY 17	2-OBBS-13	17 AUG 17
4.4-5	25 MAY 17	2-OBBI-28	17 SEP 15	2-OBBS-14	17 SEP 15
4.5-1	17 SEP 15	2-OBBI-29	25 MAY 17	2-000-14	17 3E1 13
4.5-1	17 SEF 15	2-OBBI-30	17 SEP 15		
		2-OBBI-31	25 MAY 17	BAHRAIN / SAK	
ENR 5.		2-OBBI-32	17 SEP 15	2-OBKH-1	17 AUG 17
5.1-1	17 SEP 15	2-OBBI-33	25 MAY 17	2-OBKH-2	26 MAY 16
5.1-2	17 SEP 15	2-OBBI-34	17 SEP 15	2-OBKH-3	26 MAY 16
5.1-3	25 MAY 17	2-OBBI-35	25 MAY 17	2-OBKH-4	17 SEP 15
5.1-4	25 MAY 17	2-OBBI-36	17 SEP 15	2-OBKH-5	17 SEP 15
5.2-1	17 SEP 15	2-OBBI-37	25 MAY 17	2-OBKH-6	17 SEP 15
5.3-1	17 SEP 15	2-OBBI-38	17 SEP 15	2-OBKH-7	17 SEP 15
5.4-1	17 SEP 15	2-OBBI-39	25 MAY 17	2-OBKH-8	17 SEP 15
5.5-1	17 SEP 15	2-OBBI-40	17 SEP 15	2-OBKH-9	17 SEP 15
5.6-1	17 AUG 17	2-OBBI-41	25 MAY 17	2-OBKH-10	17 SEP 15
		2-OBBI-42	17 SEP 15	2-OBKH-11	26 MAY 16
ENR 6.		2-OBBI-43	25 MAY 17	2-OBKH-12	17 SEP 15
6-1	17 SEP 15	2-OBBI-44	17 SEP 15	2-OBKH-13	26 MAY 16
6-2	17 SEP 15	2-OBBI-45	25 MAY 17	2-OBKH-14	17 SEP 15
		2-OBBI-46	17 SEP 15	2-OBKH-15	17 AUG 17
6-3 6-4	17 SEP 15	2-OBBI-47	25 MAY 17	2-OBKH-16	17 SEP 15
	17 SEP 15	2-OBBI-48	17 SEP 15	2-OBKH-17	17 AUG 17
6-5	25 MAY 17	2-OBBI-49	17 SEP 15	2-OBKH-18	17 SEP 15
6-6	18 AUG 16	2-OBBI-49 2-OBBI-50	17 SEP 15	2-OBKH-19	17 AUG 17
6-7	25 MAY 17				
6-8	18 AUG 16	2-OBBI-51	17 SEP 15	2-OBKH-20	17 SEP 15
6-9	17 SEP 15	2-OBBI-52	17 SEP 15	2-OBKH-21	17 AUG 17
6-10	17 SEP 15	2-OBBI-53	17 SEP 15	2-OBKH-22	17 SEP 15
		2-OBBI-54	17 SEP 15	2-OBKH-23	17 AUG 17
PART 3 - AERO	ODROMES (AD)	2-OBBI-55	17 SEP 15	2-OBKH-24	17 SEP 15
AD 0.	` ,	2-OBBI-56	17 SEP 15		
0.6-1	26 MAY 16	2-OBBI-57	25 MAY 17	AD 3.	
0.6-2	26 MAY 16	2-OBBI-58	17 SEP 15	3-1	17 SEP 15
	· ·				

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 0.5-1 5 MAR 15

GEN 0.5 LIST OF HAND AMENDMENTS TO THE AIP

AIP page(s) affected	Amendment text	Introduced by AIP Amendment NR

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/15



GEN 0.6 TABLE OF CONTENTS TO PART 1

		Page
GEN 0.		
GEN 0.1	PREFACE	GEN 0.1-1
GEN 0.2	RECORD OF AIP AMENDMENTS	GEN 0.2-1
GEN 0.3	RECORD OF AIP SUPPLEMENTS	GEN 0.3-1
GEN 0.4	CHECKLIST OF AIP PAGES	GEN 0.4-1
GEN 0.5	LIST OF HAND AMENDMENTS TO THE AIP	GEN 0.5-1
GEN 0.6	TABLE OF CONTENTS TO PART 1	GEN 0.6-1
GEN 1.	NATIONAL REGULATIONS AND REQUIREMENTS	
GEN 1.1	DESIGNATED AUTHORITIES	GEN 1.1-1
GEN 1.2	ENTRY, TRANSIT AND DEPARTURE OF AIRCRAFT	GEN 1.2-1
GEN 1.3	ENTRY, TRANSIT AND DEPARTURE OF PASSENGERS AND CREW	GEN 1.3-1
GEN 1.4	ENTRY, TRANSIT AND DEPARTURE OF CARGO	GEN 1.4-1
GEN 1.5	AIRCRAFT INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS	GEN 1.5-1
GEN 1.6	SUMMARY OF NATIONAL REGULATIONS AND INTERNATIONAL AGREEMENTS / CONVENTIONS	GEN 1.6-1
GEN 1.7	DIFFERENCES FROM ICAO STANDARDS, RECOMMENDED PRACTICES AND PROCEDURES	GEN 1.7-1
GEN 2.	TABLES AND CODES	
GEN 2.1	MEASURING SYSTEM, AIRCRAFT MARKINGS, HOLIDAYS	GEN 2.1-1
GEN 2.2	ABBREVIATIONS USED IN AIS PUBLICATIONS	GEN 2.2-1
GEN 2.3	CHART SYMBOLS	GEN 2.3-1
GEN 2.4	LOCATION INDICATORS	GEN 2.4-1
GEN 2.5	LIST OF RADIO NAVIGATION AIDS	GEN 2.5-1
GEN 2.6	CONVERSIONS OF UNIT OF MEASUREMENTS	GEN 2.6-1
GEN 2.7	SUNRISE / SUNSET	GEN 2.7-1
GEN 3.	SERVICES	
GEN 3.1	AERONAUTICAL INFORMATION MANAGEMENT	GEN 3.1-1
GEN 3.2	AERONAUTICAL CHARTS	GEN 3.2-1
GEN 3.3	AIR TRAFFIC SERVICES	GEN 3.3-1
GEN 3.4	COMMUNICATION SERVICES	GEN 3.4-1
GEN 3.5	METEOROLOGICAL SERVICES	GEN 3.5-1
GEN 3.6	SEARCH AND RESCUE	GEN 3.6-1
GEN 4.	CHARGES FOR AERODROMES / HELIPORTS AND AIR NAVIGATION SERVICES	
GEN 4.1	AERODROME / HELIPORT CHARGES	GEN 4.1-1
GEN 4.2	AIR NAVIGATION SERVICES CHARGES	GEN 4.2-1



AIP BAHRAIN FIR GEN 1.1-1
17 SEP 15

GEN 1. NATIONAL REGULATIONS AND REQUIREMENTS

GEN 1.1 DESIGNATED AUTHORITIES

1.1.1 REQUIREMENTS AND PROCEDURES

1.1.1.1 The requirements for entry and departure of aircraft engaged in international flights, and the standard procedures for clearance of these aircraft is given for the Kingdom of Bahrain. (for state of Qatar, refer to Qatar AIP)

Note: It is solely the aircraft operator's responsibility to obtain any required landing and overflight permission from the appropriate state authorities.

- 1.1.1.2 Permission to and / or overfly issued by Civil Aviation Affairs Bahrain related only to BAHRAIN INTERNATIONAL Airport and the territorial airspace of the Kingdom of Bahrain.
- 1.1.1.3 Clearances issued by the BAHRAIN ACC or Flight Information Centre are based on ATC considerations and do not absolve operators from compliance with the states facilitation regulations.

1.1.2 DESIGNATED AUTHORITIES

The addresses of designated authorities concerned with the facilitation of international air navigation (e.g. civil aviation, meteorology, customs, immigration, health, en - route and aerodrome / heliport charges, agricultural quarantine and aircraft accident investigation) containing, for each authority.

1.1.3 DIFFERENCES FROM ICAO STANDARDS AND RECOMMENDED PRACTICES

Where available, information concerning any difference from ICAO Annex 9 is published seperately for each individual State. Additional information is published when received.

KINGDOM OF BAHRAIN

1.1.4 INTRODUCTION

The requirements for entry and departure of aircraft engaged in international flights, and the standard procedure for clearance of these aircraft at international airports, are given for the information and guidance of operators conducting international flights.

1.1.5 DESIGNATED AUTHORITIES

The postal and telegraphic addresses of the designated authorities concerned with the entry, transit and departure of international air navigation and for the collection of fees therefrom, are as follows:

1.1.5.1 CIVIL AVIATION AFFAIRS

Undersecretary for Civil Aviation P.O. Box 586 Kingdom of Bahrain TEL: +973 17321100 Telefax:+973 17339066

Telefax:+973 17339066 AFS: OBBIYAYX

1.1.5.2 CIVIL AVIATION AFFAIRS

Undersecretary for Civil Aviation P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321011 Telefax:+973 17321194 AFS: OBBIYAYX

1.1.5.3 CIVIL AVIATION AFFAIRS (AIR NAVIGATION DIRECTORATE)

Director Air Navigation P.O. Box 586

Kingdom of Bahrain TEL: +973 17321116 Telefax:+973 17329977 AFS: OBBIYAYX

1.1.5.4 CIVIL AVIATION AFFAIRS (AIRPORT DIRECTORATE)

Vice President Airport Operations P.O. Box 24924 Kingdom of Bahrain

2 MAR 17

TEL: +973 17321997 Telefax:+973 17324096

1.1.5.5 CIVIL AVIATION AFFAIRS (AIRPORT CHARGES)

Director of Administration & Finance

P.O. Box 586 Kingdom of Bahrain TEL: +973 17321019 Telefax:+973 17321110

CIVIL AVIATION AFFAIRS (DIRECTORATE OF AIR TRANSPORT) 1.1.5.6

Director of Air Transport

P.O. Box 586 Kingdom of Bahrain TEL: +973 17321169 Telefax:+973 17333278 AFS: OBBIYAYX SITA: BAHAPYF

1.1.5.7 **CUSTOMS**

Director General of Customs

P.O. Box 15 Kingdom of Bahrain TEL: +973 39449050 Telefax:+973 17322919 Telex: 8642 MINA BN

BAHRAIN AIRPORT CUSTOMS INSPECTION SECTION

TEL: +973 17321620 Telefax:+973 17322919

1.1.5.8 **IMMIGRATION**

General Director of Immigration and Passports

P.O. Box 331 Kingdom of Bahrain TEL: +973 17535111 Telefax:+973 17535522

AIRPORT IMMIGRATION SECTION

TEL: +973 17321650 Telefax:+973 17333501

1.1.5.9 HEALTH

Ministry of Health P.O. Box 12 Kingdom of Bahrain TEL: +973 17255555 Telefax:+973 17252569

Airport Health Office TEL: +973 17321690

1.1.5.10 AGRICULTURAL & VETERINARY QUARANTINE

Ministry of Municipalities & Agriculture Affairs

Farmers' Services Directorate

P.O. Box 251 Kingdom of Bahrain Telex: 7200 ZERAA BN

AGRICULTURAL AFFAIRS TEL: +973 17691215 Telefax:+973 17695527

MINISTRY OF MUNICIPALITIES

TEL: +973 17229888 Telefax:+973 17229666

AIRAC AMDT 03/17 **CIVIL AVIATION AFFAIRS** AIP BAHRAIN FIR GEN 1.1-3
17 SEP 15

1.1.5.11 MINISTRY OF INTERIOR (DIRECTOR OF AIRPORT SECURITY AREA)

Ministry of Interior P.O. Box 13 Kingdom of Bahrain TEL: +973 17321600 Telefax:+973 17332718

Telefax:+973 17332718
Telex: 9572 PSMKT BN

1.1.5.12 MINISTRY OF FOREIGN AFFAIRS

Ministry of Foreign Affairs P.O. Box 547 Kingdom of Bahrain Telefax:+973 17211416 Telex: 8228 KARJIA BN

TRACKING OFFICE

TEL: +973 17227555, +973 17212006

Telefax:+973 17210575

1.1.6 APPROVED AIRCRAFT HANDLING AGENCIES

Bahrain Airport Services (BAS) P.O. Box 22285 Kingdom of Bahrain

TEL: +973 17321444
Telefax:+973 17322317
Telex: 8971 BASBA BN
AFS: OBBIXHAX
SITA: BAHKBXH

1.1.7 APPROVED AVIATION FUELLING

Bahrain Aviation Fuelling Company - BAFCO P.O. Box 50500 Kingdom of Bahrain

TEL: +973 17329400 (Office) / +973 17329440 (Operations - H24)

Telefax:+973 17336464



AIP BAHRAIN FIR GEN 1.2-1
2 MAR 17

GEN 1.2 ENTRY, TRANSIT AND DEPARTURE OF AIRCRAFT

1,2,1 KINGDOM OF BAHRAIN

1.2.1.1 REGULATIONS AND REQUIREMENTS FOR ADVANCE NOTIFICATION AND APPLICATIONS FOR PERMISSION CONCERNING ENTRY, TRANSIT AND DEPARTURE OF AIRCRAFT ON INTERNATIONAL FLIGHTS

1.2.1.1.1 **GENERAL**

All flights landing in, departing from or overflying the territory of Bahrain shall comply with Bahrain Civil Aviation Law and Regulations and must include a valid mailing address of the company for which payment invoice must be issued to, failure to comply will result in rejecting the relevant approval request.

1.2.1.1.1.1 INFORMATION REQUIRED FROM AIRCRAFT OPERATORS

The following information is required from all aircraft operators for any type of operations:

- 1. Aircraft Operator (Air Operator's Certificate (AOC) holder) and Address
- 2. Aircraft Charterer (if any)
- 3. Call Sign / Flight Number or Registration mark(s)
- 4. Aircraft Type & Nature of flight
- 5. Full Sector or Flight (from / to) & ETA / ETD
- 6. If Dangerous Goods are carried, refer also to GEN 1.4
- 7. Proposed date(s) of flight(s)
- 8. Aircraft configuration (passenger and cargo capacity)
- 9. Postal address of the company for collection of bills and payments.
- 10. Postal address of the agent and its client, if any.
- 11. Finance section contact details, telephone, fax and email.

1.2.1.1.1.2 APPLICATIONS FOR APPROVAL

All applications should be addresses to the attention of:

Director of Air Transport

P.O. Box 586 Kingdom of Bahrain

TEL: +973 17329035/+973 17329011/+973 17329061/+973 17329096

Telefax:+973 17329083/+973 17333278

e-mail: schedule@mtt.gov.bh

AFS: OBBIYAYX SITA: BAHAPYF

Aircraft landing in or departing from the territory of Bahrain must first land at or finally depart from the international Airport.

1.2.1.1.2 SCHEDULED OPERATIONS

1.2.1.1.2.1 TRAFFIC STOPS IN THE TERRITORY OF BAHRAIN

For regular international scheduled flights into Bahrain, the airline must be designated pursuant to a bilateral or multilateral agreement to which the government of Bahrain and that of the State in which the airline is registered are parties, or have been granted a Temporary Operating Permit (T.O.P.) by Bahrain CAA. Applications should be made 30 days prior to the proposed date of commencement of operation to the address shown in **GEN 1.2.1.1.1.2**. The following information and documents are required from aircraft operators in addition to the information shown under **GEN 1.2.1.1.1.1** above:

- a) Information
 - 1. Period of Operation
 - 2. Aircraft Configuration (Passengers & Cargo Capacity)
 - 3. Frequency (days of the week)

Note: see recommended Airlines Schedule Application Format

- b) Pre-requisite valid documents:
 - 1. Air Operator's Certificate, reflecting the aircraft registration mark(s)
 - 2. Certificate of Registration
 - 3. Certificate of Airworthiness
 - 4. Insurance Certificate with full liability coverage (refer to GEN 1.2.1.1.8)
 - 5. Noise Certificate
 - 6. Aircraft Radio Station License
 - 7. ACAS II / TCAS Certificate (mandatory within Bahrain airspace)
 - 8. Basic Area Navigation (B RNAV) Certificate, if equipped
 - 9. RVSM Certificate, when operating above 29000 feet

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

- 17 SEP 15
 - In case of a leased aircraft:
 - a) A copy of the lease agreement, approved by the State of Registry and the state operator; and
 - b) Conformity statement from the State of Registry, stating that it will remain responsible for the safety oversight.
 - (c) In case of transfer of functions of the State of Registry to the State of Operator, evidence is required showing the state responsible for safety oversight.

1.2.1.1.2.2 OVERFLYING AND TECHNICAL STOPS

- 1.2.1.1.2.2.1 Subject to the observance of the applicable rules and regulations, aircraft registered in ICAO States and operated by an airline of any contracting State may overfly or make non-traffic stops in the territory of Bahrain provided the State concerned being signatory to the International Air Transit Agreement. There is no requirement to request for overflying permission for such aircraft. Applications for non-traffic stops should be made to the address shown in GEN 1.2.1.1.1.2 a minimum notice period of one week is required for administrative and operational reasons. The following information is required from aircraft operators in addition to the information shown under GEN 1.2.1.1.1 above:
- 1. Period of Operation
- 2. Aircraft Configuration (Passengers & Cargo Capacity)
- 3. Frequency (days of the week)
- 1.2.1.1.2.2.2 Operators of aircraft registered in States that are not signatory to the ICAO convention must be obtain prior approval to overfly or land in the territory of Bahrain. A minimum notice period of one week is required for administrative and operational reasons.

Note: see recommended Airlines Schedules Application Format

1.2.1.1.2.3 DOCUMENTARY REQUIREMENTS FOR THE CLEARANCE OF AIRCRAFT

- 1.2.1.1.2.3.1 It is necessary that the aircraft documents shown in the table in **GEN 1.2.1.1.2.4** be submitted by aircraft operators for the clearance on entry and departure of their aircraft to and from Bahrain.
- 1.2.1.1.2.3.2 One copy of the General Declaration must be signed by the pilot in command or an authorized agent.
- 1.2.1.1.2.3.3 All documents listed below must follow the ICAO standard format, set forth in the relevant appendices to Annex 9, must be furnished in English and be completed legibly.
- 1.2.1.1.2.3.4 No visas are required in connection with such documents.

1.2.1.1.2.4 AIRCRAFT DOCUMENTS REQUIRED (ARRIVAL / DEPARTURES)

REQUIRED BY	GENERAL DECLARATION	PASSENGER MANIFEST	CARGO MANIFEST
IMMIGRATION	NIL	NIL	NIL
HEALTH	1	1	NIL
CUSTOMS	NIL / 1	NIL	1/1
TOTAL	2	1	2

Note: If no passengers are embarking or disembarking and no articles are loaded or unloaded, no documents except copies of the General Declaration need to be submitted

1.2.1.1.2.5 PUBLIC HEALTH MEASURES APPLIED TO AIRCRAFT

If more than four weeks have elapsed since the date of issue of the certificate of Residual Disinfection, and the aircraft has originated in or arrived from a malarious area or a yellow fever endemic area, aerosol disinfection of the aircraft should be carried out before taking off, or on arrival.

NON SCHEDULED OPERATIONS 1.2.1.1.3

TRAFFIC STOPS IN THE TERRITORY OF BAHRAIN 1.2.1.1.3.1

If an operator intends to make an non - scheduled stop in the territory of Bahrain for the purpose of taking on or discharging passengers, cargo or mail, the Air Operator's Certificate (AOC) - holder should apply to the address shown in GEN 1.2.1.1.1.2, a minimum notice period of one week is required. The following valid documents are required from AOC - holder in addition to the information shown under GEN 1.2.1.1.1.1 above:

1. Air Operator's Certificate, reflecting the aircraft registration mark(s)

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS AIP BAHRAIN FIR GEN 1.2-3
17 SEP 15

- 2. Certificate of Registration
- 3. Certificate of Airworthiness
- 4. Insurance Certificate with full liability coverage (refer to GEN 1.2.1.1.8)
- 5. Noise Certificate
- 6. Aircraft Radio Station License
- 7. ACAS II / TCAS Certificate (mandatory within Bahrain airspace)
- 8. Basic Area Navigation (B RNAV) Certificate, if requipped
- 9. RVSM Certificate, when operating above 29000 FT
- 10. In case of a leased aircraft:
 - (a) A copy of the lease agreement, approved by the State of Registry and the State of Operator; and
 - (b) Conformity statement from the State of Registry, stating that it will remain responsible for the safety oversight.
 - (c) In case of transfer of functions of the State of Registry to the State of Operator, evidence is required showing the state responsible for safety oversight.

1.2.1.1.3.2 OVERFLYING AND TECHNICAL STOPS

- 1.2.1.1.3.2.1 Subject to the observance of the applicable rules and regulations, aircraft registered in ICAO States and operated by an airline of any contracting State may over fly or make non traffic stops in the territory of Bahrain provided the State concerned being signatory to the Chicago Convention on International Civil Aviation. There is no requirement to request for over flying permission for such aircraft except when the flight is involved in Diplomatic or Military operations e.g. State VIP, transportation of ammunitions etc. in which case an application for approval should be made in accordance with **GEN 1.2.1.1.5.1** below. Applications for non traffic stops should be made to the address shown in **GEN 1.2.1.1.1.2**. A minimum notice period of 48 hours is required for administrative and operational reasons. The following information is required from aircraft operators in addition to the information shown under **GEN 1.2.1.1.1.1** above:
- 1. Date of Flight(s)
- 2. Type of Cargo (if any)
- 1.2.1.1.3.2.2 Operators of aircraft registered in States that are not signatory to the ICAO convention must obtain prior approval to overfly or land in the territory of Bahrain. A minimum notice period of one week is required for the administrative and operational reasons.

1.2.1.1.3.3 DOCUMENTARY REQUIREMENTS FOR THE CLEARANCE OF AIRCRAFT

The same as for scheduled flights (see GEN 1.2.1.1.2.3).

1.2.1.1.3.4 AIRCRAFT DOCUMENTS REQUIRED (ARRIVAL / DEPARTURE)

REQUIRED BY	GENERAL DECLARATION	PASSENGER MANIFEST	CARGO MANIFEST
IMMIGRATION	1	1	NIL
HEALTH	1	1	NIL
CUSTOMS	1/1	NIL	1
TOTAL	4	2	1

1.2.1.1.3.5 PUBLIC HEALTH MEASURES APPLIED TO AIRCRAFT

The same as for scheduled flights.

1.2.1.1.4 PRIVATE / GENERAL AVIATION OPERATIONS

1.2.1.1.4.1 TRAFFIC STOPS IN THE TERRITORY OF BAHRAIN

If an operator wishes to land in the territory of Bahrain for the purpose of taking on or discharging of passengers, cargo or mail, he should apply for approval to the address shown in **GEN 1.2.1.1.1.2**, a minimum notice period of 48 hours is required for administrative and operational reasons. The following information is required from aircraft operators in addition to the information shown under **GEN 1.2.1.1.1.1** above:

- 1. Purpose of Flight
- 2. Passenger & Company Name
- 3. Name of VIP (if any)
- 4. Type of Cargo (if any)
- 5. Hosting Company and / or Contact in Bahrain

Note: see recommended Request Processing Information List

GEN 1.2-4 AIP BAHRAIN FIR 17 SEP 15

1.2.1.1.4.2 OVERFLYING AND TECHNICAL STOPS

1.2.1.1.4.2.1 Subject to the observance of the applicable rules and regulations, there is no requirement to request permission for overflying or refuelling / crew rest stops for such aircraft except when the flight is involved in Diplomatic or Military Operations e.g. State VIP, Transportation of ammunitions etc. in which case an application for approval should be made in accordance with **GEN 1.2.1.1.5.1** below.

1.2.1.1.4.2.2 Operators of aircraft registered in states that are not signatory to the ICAO convention must obtain prior approval to overfly or land in the territory of Bahrain. A minimum notice period of 48 hours is required for administrative and operational reason.

Note: see recommended Request Processing Information List

1.2.1.1.4.3 DOCUMENTARY REQUIREMENTS FOR THE CLEARANCE OF AIRCRAFT

The same as for scheduled flights (see GEN 1.2.1.1.2.3)

1.2.1.1.4.4 AIRCRAFT DOCUMENTS REQUIRED (ARRIVAL / DEPARTURE)

REQUIRED BY	GENERAL DECLARATION	PASSENGER MANIFEST	CARGO MANIFEST
IMMIGRATION	1	1	NIL
HEALTH	1	1	NIL
CUSTOMS	1/1	NIL	1
TOTAL	4	2	1

1.2.1.1.4.5 PUBLIC HEALTH MEASURES APPLIED TO AIRCRAFT

The same as for non - scheduled flights

1.2.1.1.5 APPLY FOR APPROVAL

Any State or Military aircraft (including chartered flights) wishing to overfly, land in or depart from the territory of Bahrain shall apply for approval. A minimum notice period of one week before the intended date of overflight, arrival or departure is required.

Applications should be made to:

1.2.1.1.5.1 Address

Ministry of Foreign Affairs P.O. Box 547 Kingdom of Bahrain Telefax:+973 17210575 Telex: 8228 KARJIA BN

With a copy to:

Director of Air Transport P.O. Box 586 Kingdom of Bahrain Telefax:+973 17333278 AFS: OBBIYAYX SITA: BAHAPYF

1.2.1.1.6 Information required from aircraft operators

The following information is required from aircraft operators in addition to the information shown under GEN 1.2.1.1.1.1 above:

- 1. Purpose of Flight
- 2. Name of VIP (if any)
- 3. Type of Cargo (if any)

1.2.1.1.7 VVIP / VIP FLIGHT OPERATIONS

Any operator carrying out a VVIP / VIP flight for the purpose of landing in, departing from or overflying the territory of Bahrain shall apply for approval to the Ministry of Foreign Affairs as detailed in **GEN 1.2.1.1.5** above.

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 1.2-5
17 SEP 15

1.2.1.1.8 INSURANCE COVER IN RESPECT OF LIABILITY FOR PASSENGERS, BAGGAGE, CARGO AND THIRD PARTIES

1.2.1.1.8.1 REQUIREMENT FOR MINIMUM INSURANCE COVER

1.2.1.1.8.1.1 Air carriers and aircraft operators are required to provide a minimum insurance cover in respect of passengers, baggage and cargo in accordance with the rules of Montreal Convention (signed on 28 May 1999); and in respect of third parties in accordance with **GEN 1.2.1.1.8.4** below.

1.2.1.1.8.1.2 The insurance shall cover aviation - specific liability in respect of passengers, baggage, cargo and third parties. Regarding passengers, baggage and cargo insurance shall include cover for death and personal injury caused by accidents and for loss or destruction of or damage to baggage and cargo. Regarding third parties, insurance shall include cover for death, personal injury and damage to property caused by accidents.

1.2.1.1.8.2 **DEFINITIONS**

- a) "air carrier" means an air transport undertaking with a valid operating license or Air Operator's Certificate;
- b) "aircraft operator" means the person or entity, not being an air carrier, who has continual effective disposal of the use or operation of the aircraft; the natural or legal person in whose name the aircraft is registered shall be presumed to be the operator, unless that person can prove that another person is the operator;
- c) " flight means";
 - with regard to passengers and unchecked baggage, the period of transport of the passengers by aircraft including their boarding and disembarkation.
 - with regard to cargo and checked baggage, the period of transport of baggage and cargo from the moment the baggage or cargo is handed to the air carrier until the moment of delivery to the entitled recipient,
 - with regard to third parties, the use of an aircraft from the moment when power is applied to its engines for the purpose of taxiing or
 actual take off until the moment when it is on the surface and its engines have come to a complete stop; additionally, it shall mean
 the moving of an aircraft by towing and push back vehicles or by powers which are typical for the drive and lift of aircraft, particularly
 air streams;
- d) "SDR" means a Special Drawing Right as defined by the International Monetary Fund;
- e) "MTOM" means the Maximum Take off Mass, which corresponds to a certified amount of specific to all aircraft types, as stated in the certificate of airworthiness of the aircraft;
- f) "Passenger" means any person who is on the flight with the consent of the air carrier or the aircraft operator, excluding on duty members of both the flight crew and the cabin crew;
- g) "third party" means any legal or natural person, excluding passengers and on duty members of both the flight crew and the cabin crew;
- h) "commercial operation" means an operation for remuneration and / or hire.

1.2.1.1.8.3 PRINCIPLES OF INSURANCE

- 1.2.1.1.8.3.1 The insured risks shall include acts of war, terrorism, hijacking, acts of sabotage, unlawful seizure of aircraft and civil commotion.
- 1.2.1.1.8.3.2 Air carriers and aircraft operators shall ensure that insurance cover exists for each and every flight, regardless of whether the aircraft operated is at their disposal through ownership or form of lease agreement, or through joint or franchise operations, code sharing or any other agreement of the same nature.

1.2.1.1.8.4 INSURANCE IN RESPECT OF LIABILITY FOR THIRD PARTIES

In respect of liability for third parties, the minimum insurance cover per accident, for each and every aircraft, shall be:

CATEGORY	MOTOM (kg)	MINIMUM insurance (million SDRs)	
1	< 500	0.75	
2	< 1000	1.5	
3	< 2700	3	
4	< 6000	7	
5	< 12000	18	
6	< 25000	80	
7	< 50000	150	
8	< 200000	300	
9	< 500000	500	
10	= / > 500000	700	

GEN 1.2-6
AIP BAHRAIN FIR
17 SEP 15

1.2.1.1.8.5 AMENDMENT TO THE INSURANCE VALUES

The insurance values may be amended, as appropriate, when amendments in the relevant international treaties indicate the necessity thereof.

1.2.1.1.8.6 EVIDENCE OF ADEQUATE INSURANCE COVER

Air carriers and air operators are required to provide evidence of adequate insurance cover stated as above. In an event such evidence is not provided, operating permission shall be denied.

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 1.2-7
17 SEP 15

RECOMMENDED PRESENTATION FORMAT FOR AIRLINES SCHEDULE APPROVAL APPLICATIONS

			PE	RIOD OF OPI	ERATION		
FROM:						TO:	
FLT. NO	FREQUENCY (DAYS)	FULL	SECTOR	OF FLIGHT &	TIMES	A / C TYPE	CONFIGURATION
	(DATO)	STD	ETD	STN	ETA		
						1	

Note: 1. All times local, unless specified. 2. This form may be reproduced to suit individual airline's need e.g. SITA / AFTN.

RECOMMENDED REQUEST PROCESSING INFORMATION LIST FOR PRIVATE / GENERAL AVIATION FLIGHTS

1. Aircraft Operator & Address:		
2. Aircraft Charterer (if any):		
3. Aircraft Call Sign:		
4. Aircraft Registration:		
5. Aircraft Type:	Nature of flight:	
6. Sector of flight (from / via / to):		
7. ETA / ETD:		
8. Name of VIP & Title (if any):		
9. Type of Cargo (if any):		
10. Any other Details:		
For Landing other than Refuel & Crew Rest the following information is also required:		
11. Purpose of flight:		
12. Passenger & Company Name:		
13. Hosting Company and / or Person in Bahrain:		

Note: This form may be reproduced to suit individual operator's need e.g. SITA / AFTN.

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 1.3-1
17 SEP 15

GEN 1.3 ENTRY, TRANSIT AND DEPARTURE OF PASSENGERS AND CREW

KINGDOM OF BAHRAIN

1.3.1 REGULATIONS (INCLUDING CUSTOMS, IMMIGRATION AND QUARANTINE, AND REQUIREMENTS FOR ADVANCE NOTIFICATION AND APPLICATIONS FOR PERMISSION) CONCERNING ENTRY, TRANSIT AND DEPARTURE OF PASSENGERS AND CREW

1.3.1.1 IMMIGRATION REQUIREMENTS

1.3.1.1.1 ARRIVING PASSENGERS

A person entering Bahrain for the purpose of immigration must hold a valid passport. A 72 - hour visa can be obtained for non - immigration purposes such as business. Disembarkation cards must be completed.

1.3.1.1.2 TRANSIT PASSENGERS

No documents or visa are required for passengers arriving and departing on the same flight, or transferring to another flight at the same airport.

1.3.1.1.3 DEPARTING PASSENGERS

From departing passengers, inspection of identity documents and completion of an embarkation card are required.

1.3.1.1.4 CREW

A crew member license is acceptable.

1.3.1.2 CUSTOMS REQUIREMENTS

1.3.1.2.1 ARRIVAL

Baggage belonging to disembarking passengers and crew is immediately inspected and released if it does not contain any prohibited, restricted or dutiable goods. Dutiable items are released immediately on payment of duty.

1.3.1.2.2 TRANSIT

Not specified

1.3.1.2.3 DEPARTURE

For embarking passengers, the inspection of baggage is not normally required.

1.3.1.3 PUBLIC HEALTH REQUIREMENTS

1.3.1.3.1 ARRIVAL

A Yellow Fever vaccination certificate is required from travellers over one year of age coming from infected areas.

1.3.1.3.2 TRANSIT

Not specified

1.3.1.3.3 DEPARTURE

On departure, no health formalities are required.



AIP BAHRAIN FIR GEN 1.4-1
17 SEP 15

GEN 1.4 ENTRY, TRANSIT AND DEPARTURE OF CARGO

1.4.1 KINGDOM OF BAHRAIN

1.4.1.1 REGULATIONS (INCLUDING CUSTOMS, AND REQUIREMENTS FOR ADVANCE NOTIFICATION AND APPLICATIONS FOR PERMISSION) CONCERNING ENTRY, TRANSIT AND DEPARTURE OF CARGO

Note: Provisions for facilitating entry and departure for search, rescue, salvage, investigation, repair or salvage in connection with lost or damaged aircraft are detailed in section GEN 3.6. Search and Rescue.

1.4.1.1.1 CUSTOMS REQUIREMENTS CONCERNING CARGO AND OTHER ARTICLES

1.4.1.1.1 IMPORTS

All air cargo shipments for Bahrain or in transit Bahrain are subject to customs clearance before release. For clearance, the appropriate Customs Declaration supported by required documents, notably genuine commercial supplier's invoice and Certificate of Origin must be presented.

1.4.1.1.1.2 TRANS - SHIPMENTS

Trans - shipment from one flight to another is permitted under customs supervision and must be recorded in the Export Manifest of departing flights.

1.4.1.1.1.3 EXPORTS

Air cargo shipments from Bahrain may be required to be cleared through customs on the appropriate customs declaration before shipment, especially when draw back of duty or deposit is claimed.

1.4.1.1.2 AGRICULTURAL QUARANTINE REQUIREMENTS

1.4.1.1.2.1 ARRIVAL

Advance permits are required for the importation of plants, plant parts, seeds and organic fertilizers. Advance permits are also required for the importation of live animals to Kingdom of Bahrain.

Details are available on application to the Ministry of Municipalities and Agriculture Affairs, Farmer's Services Directorate at the address shown on **GEN 1.1**.

1.4.1.1.2.2 TRANSIT

See GEN 1.4.1.1.2.1

1.4.1.1.2.3 DEPARTURE

See GEN 1.4.1.1.2.1

1.4.1.1.3 SAFE TRANSPORT OF DANGEROUS GOODS BY AIR

1.4.1.1.3.1 **General**

- 1.4.1.1.3.1.1 The Kingdom of Bahrain legislation requires that the transportation of all classes of dangerous goods is done in accordance with instructions contained in the Technical instructions for the safe Transport of Dangerous Goods by Air, ICAO Doc 9284 AN / 905 and CAA Publication CAP 02.
- 1.4.1.1.3.1.2 The Kingdom of Bahrain legislation expressly forbids the transport of the following items by aircraft, except with the prior permission from Civil Aviation Affairs and in accordance with the conditions mentioned in this permission:
- a) Weapons and munitions
- b) Explosives, unless required on board the aircraft for its operation, or for signaling
- c) Poisonous Gases
- d) Germs
- e) Radioactive material, radioisotopes and similar substances
- f) Any other prohibited item as determined by the competent authority
- 1.4.1.1.3.1.3 An Operator who intends to transport dangerous goods by air, is required to apply and be approved in accordance with CAA publication CAP 02.
- 1.4.1.1.3.1.4 In the event of an accident / incident involving dangerous goods, the operator is required to adhere to the reporting procedures

17 SEP 15

in accordance with CAA publication CAP 02.

1.4.1.1.3.2 Overflying BAHRAIN FIR / BAHRAIN UIR

An Operator desirous to carry dangerous goods and applying for permission to overfly the BAHRAIN FIR / BAHRAIN UIR, must ensure that all dangerous goods have been packed, marked, labelled and handled in accordance with ICAO Annex 18 - Safe Transport of Dangerous Goods by Air, and the requirements of ICAO Technical Instructions Doc, 9284 - AN / 905, and must make an undertaking to CAA to this effect. This undertaking must be made at the time of providing notification of over flight / applying for the required permission (**GEN 1.2** refers).

1.4.1.1.3.3 Transportation of Arms, Ammunition and all Classes of Explosives

1.4.1.1.3.3.1 Furthermore, the transportation of arms, ammunition and all classes of explosives from / to / through Bahrain requires prior permission to be obtained from the Ministry of the Interior (MOI) and Civil Aviation Affairs (CAA) of the Kingdom of Bahrain.

1.4.1.1.3.3.2 Applications are required to be made at least seven working days in advance of the proposed date of transportation to an appropriate office of the Ministry of Interior (MOI):

(a) Transportation To / From Bahrain

(Form: AT / ARL / F002 a)

Ministry of Interior
Public Security Headquarters
Kingdom of Bahrain
TEL: +973 17272111
Telefax:+973 17270463

Telex: 9572 BN

(b) Transit / Transshipment at Bahrain

(Form: AT / ARL / F 002 b)

Ministry of Interior Airport Directorate Bahrain International Airport Kingdom of Bahrain

TEL: +973 17321604 / +973 17321605

Telefax:+973 17332718

1.4.1.1.3.3.3 On receipt of "no objection" from MOI, the application is required to be forwarded to CAA, at least three working days prior to the proposed date of transportation for final approval:

Head of Aircraft Registration and Licensing Air Transport Directorate Civil Aviation Affairs P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321006 Telefax:+973 17321061 Telex: 9186 AIRCIV BN

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 1.5-1
17 SEP 15

GEN 1.5 AIRCRAFT INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS

1.5.1 GENERAL

1.5.1.1 CARRIAGE OF RADIO AND RADAR EQUIPMENT

1.5.1.1.1 To assist in the expeditious of air traffic throughout the BAHRAIN FIR / BAHRAIN UIR by the fullest use of the Navigation Aids provided for this purpose, the appropriate authorities of state providing Approach and / or Area Control Services have agreed to the requirements shown in **GEN 1.5.1.3** and **GEN 1.5.1.4** below for the carriage of Radio and Radar equipment.

1.5.1.1.2 Carriage of equipment listed under Paragraphs GEN 1.5.1.3.1, GEN 1.5.1.3.2 and GEN 1.5.1.4.1 is mandatory.

1.5.1.2 CARRIAGE COMMUNICATIONS, NAVIGATION AND APPROACH AID EQUIPMENT

The requirements applicable to all aircraft flying in the BAHRAIN FIR / BAHRAIN UR and those particular to aircraft flying for the purpose of public transport are tabulated below. No general exemption from these requirements will be granted, but in very special circumstances relaxation of the requirements for a single flight may be approved by the Bahrain Air Traffic Control Centre or by the appropriate Approach Control Unit.

1.5.1.3 COMMUNICATION, NAVIGATION AND APPROACH EQUIPMENT REQUIRED

1.5.1.3.1 Flight under IFR in Controlled Airspace up to FL 150

COMMUNICATIONS EQUIPMENT

VHF RTF with appropriate frequencies available

NAVIGATION EQUIPMENT

- a) in Control Areas and Control Zones VOR Receiver and automatic D / F and receiver for 75 MHZ Beacons
- b) in BAHRAIN CTA and Terminal Manoeuvring Areas, in addition to (a) above, DME

APPROACH AID EQUIPMENT

For landing at certain aerodromes within Control Zones an Approach Aid, e.g. ILS

Exception

Gliders, helicopters and light aircraft of 2500 KG MAUW or less, and special VFR flights, are exempt from the Navigation Equipment requirements.

1.5.1.3.2 Flight in Controlled Airspace above FL 150

In addition to GEN 1.5.1.3.1, DME

1.5.1.3.3 Public Transport Aircraft flying under IFR

Equipment as in GEN 1.5.1.3.1 and GEN 1.5.1.3.2

1.5.1.3.4 Public Transport Aircraft flying under VFR

Sufficient equipment to maintain two - way communication with appropriate ATS units and also to navigate to the Flight Plan and ATC instructions.

Note: See also GEN 3.4 with reference to the continuous guarding of emergency frequencies.

1.5.1.4 CARRIAGE OF SSR TRANSPONDERS

1.5.1.4.1 The requirements for the carriage of radar equipment in the BAHRAIN FIR / BAHRAIN UIR are as follows:

All TFC WI **OBBB FIR** / UIR:

Mode A - 4096 Codes and Mode C

1.5.1.4.2 Exception for carrying Mode C

Gliders

Helicopters below 1000 FT

GEN 1.5-2 AIP BAHRAIN FIR

3 MAR 16

1.5.1.4.3 **Exemptions**

The grant of exemptions from meeting the above requirements for the carriage of SSR transponder will only be considered in exceptional circumstances, and for limited periods. Applicants for exemption should submit full details of their inability to meet the requirements to:

Undersecretary for Civil Aviation P.O. Box 586 Kingdom of Bahrain Telefax:+973 17339066 AFS: OBBIYAYX

1.5.1.5 CARRIAGE OF AIRBORNE COLLISION AVOIDANCE SYSTEM - ACAS II

- 1.5.1.5.1 All fixed wing turbine engine aircraft having maximum take off mass in excess of 5700 KG or approved passenger seating configuration of more than 19, will be required to be equipped with ACAS II.
- 1.5.1.5.2 Aircraft that failed to install ACAS II shall not be permitted to operate within BAHRAIN FIR / BAHRAIN UIR.
- 1.5.1.5.3 All aircraft fitted with ACAS II equipment, shall be fitted with software version 7.1 with mode S transponder compliant with Annex 10, Volume IV within the OBBB EFF 1st Jan 2017.

1.5.1.6 AUTHORIZATION FOR FLIGHT IN RVSM AIRSPACE

- 1.5.1.6.1 Aircraft intending flight in airspace where RVSM rules are applied are required to carry specific approval for RVSM operations from their State of Registry.
- 1.5.1.6.2 State aircraft are exempt from the requirement to carry RVSM documentation.

Note: In these cases 2000 FT vertical separation shall be applied. However, priority for allocation of levels will be in accordance with the criteria of making the best use of available airspace.

1.5.2 NAVIGATION EQUIPMENT FAILURE PROCEDURES

- 1.5.2.1 If part of an aircraft's radio navigation equipment fails, but two-way communication can still be maintained with ATC, the pilot must inform ATC of the failure and report his altitude and approximate position. ATC may at its discretion authorize the pilot to continue his flight in or into controlled airspace. When radar is available it may, subject to workload, be used to provide navigational assistance to the pilot.
- 1.5.2.2 If no authorization to proceed is given by ATC the pilot should leave or avoid controlled airspace and areas of dense traffic, and either:
- a) Go to an area in which he can continue his flight in VMC, or
- b) Select a suitable area in which to descend through cloud, fly visually to a suitable aerodrome and land as soon as practicable.

Note: Before doing so, however, he should consult ATC who may be able to give him instructions or advice. He should also take into consideration the latest meteorological information and terrain clearance.

AIP 6th Edition 03/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 1.6-1
2 MAR 17

GEN 1.6 SUMMARY OF NATIONAL REGULATIONS AND INTERNATIONAL AGREEMENTS / CONVENTIONS

1.6.1. The following is a list of Civil Aviation Legislation, Air Navigation Regulation etc. in force in certain areas of the BAHRAIN FIR / BAHRAIN UIR. They are available from:

Head of Aviation Safety Civil Aviation Affairs P.O. Box 586 Kingdom of Bahrain

		Reference NO.
(a)	Civil Aviation Law No: 14 / 2013	CAA Law
(b)	Air Navigation Technical Regulations	ANTR
(c)	Safe Transport of Dangerous Goods by Air	(PO1/01)
(d)	Procedures for Aircraft Accident & Incident Investigation	(PO1/02)
(e)	Procedures for ATC Incident Reporting	(PO1/03)
(f)	The Mandatory Occurrence Reporting Scheme for Bahrain Registered Aircraft	(PO1/05)
(g)	Air Operators Certificate	(PO1/06)
(h)	The Completion of Application Forms for the Grant, Renewal or Variation of an Air Operators Certificate	(PO1/07)
(i)	Maintenance Engineer Licensing	(PO1/08)
(j)	Flight Crew Licensing	(PO1/09)
(k)	Designated Examiner : Flight Crew	(PO1/10)
(I)	Procedures for Air Ambulance Operations and Emergency Medical Services	(PO1/12)

Summary of the procedure for issuance / Validation of Licenses (Refer P01/79) in GEN 1.6.1 above:

The licenses issued by ICAO contracting state may be recognized by the Kingdom of Bahrain provided that the following are adhered to:

- a) A license is issued by a contracting state to the convention on International Civil Aviation, in accordance with Annex 1 to the convention, and is valid at the time of application;
- b) The training organization and syllabus meet Bahrain CAA requirements;
- c) The applicant is employed by a Bahrain registered operator; and
- d) The applicant successfully passes an examination on Bahrain aviation law and regulations, conducted by Bahrain CAA.

1.6.2 International agreements / conventions: Kingdom of Bahrain

Convention on International Civil Aviation (The Chicago Convention)

Convention for the Unification of Certain Rules Relating to International Carriage by Air (The Warsaw Convention)

International Air Services Transit Agreement

Convention on offences and certain Other Acts Committed on Board Aircraft (The Tokyo Convention)

Convention for the Suppression of Unlawful Seizure of Aircraft (The Hague Convention)

Convention for the Suppression of Unlawful Acts against the Safety of Civil Aviation (The Montreal Convention)

Convention on the Privileges and Immunities of specialized Agencies (United Nations)

Convention on the Marking of plastic Explosives for the Purpose of Detection

Convention on Damage Caused by Foreign Aircraft to Third Parties on surface (Rome, 7 October 1952) and protocol to emend the same (Montreal, 23 September 1978)

Convention for the Unification of Certain Rules for International Carriage by Air (Montreal, 28 May 1999)

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17



AIP BAHRAIN FIR GEN 1.7-1
2 MAR 17

GEN 1.7 DIFFERENCES FROM ICAO STANDARDS, RECOMMENDED PRACTICES AND PROCEDURES

GENERAL

The rules of the air and air traffic procedures applicable to air traffic within the BAHRAIN FIR / BAHRAIN UIR conform with Annexes 2 and 11 to the Convention on International Civil Aviation, the Procedures for Air Navigation Services and the Regional Supplementary Procedures applicable to the MID / SIA Region, except in the cases indicated hereunder. Any differences which are attributable to the Bahrain ATC are registered with the International Civil Aviation Organization (ICAO).

With reference to Annex 2 Chapter 4 para. 4.3, VFR flights are permitted between the hours of sunset and sunrise in CLASS C, D and CLASS G airspace.

Aircraft operating off airways are required to send position reports as soon as practicable after the first half - hour of flight and at hourly intervals thereafter. As the BAHRAIN FIR and BAHRAIN UIR are considered to be areas over which Search and Rescue operations may be difficult, aircraft must transmit at least one signal in the interval between position reports.

ANNEX 1 PERSONNEL LICENSING (11th Edition JULY 2011):

Note: On request, the Kingdom of Bahrain will accept international air services / commercial operations by pilots of Contracting States beyond their 60th birthday up to the age stipulated by their respective states of Registry, which has filed a difference with ICAO, to a maximum of 65 years on the condition that the other pilot is below the age of 60 years.

ı

ANNEX 2 - RULES OF THE AIR (10th Edition JULY 2005):

Appendix 3

A modified table of cruising levels applies; see ENR 1.7

PROCEDURES FOR NAVIGATION SERVICES: AIR TRAFFIC MANAGEMENT SERVICES. (DOC 4444 - ATM / 501)

Part II 8.4

REPETITIVE FLIGHT PLANS / FLIGHT SCHEDULE DATA LISTS

Pending full implementation of the RPL concept, RPLs are transmitted on the AFTN as if they were filed Flight Plans.

(I) Operators are required to submit advance details of their Season Scheduled Services (or any changes thereto) operating within the BAHRAIN FIR / BAHRAIN UIR, so as to the address shown below at least 14 days in advance of the effective date (s) in the format shown in the Repetitive Plan Listing Form:

THE FLIGHT DATA PROCESSING UNIT (FDPU)

P.O. Box 586 (AIS), KINGDOM OF BAHRAIN

FAX: + 973 17323876

TEL: + 973 17321084 / 17321181

Note: The submission of such details to Air Traffic Services does not constitute a request for approval of flight schedules.

(II) This Date is required to be presented, on a separate sheet for each 12 hours UTC of each day, in the format shown in Repetitive Plan Listing Form.

Note: There is a requirement to indicate in Column Q for all flights the Entry point Designator for BAHRAIN FIR / BAHRAIN UIR with EST (UTC).

(III) FLIGHT PLANS

- (III 1) Scheduled flights operating wholly within BAHRAIN FIR / BAHRAIN UIR.
- (III 2) It is not necessary to file INTRA FIR Flight plans provided the seasonal schedules have been received and processed by the FDPU.

(IV) SCHEDULED FLIGHTS DEPARTING AIRFIELDS IN THE FIR AND ENTERING OTHER FIR / UIR

- (IV -1) Standard Flight Plans for flights leaving the FIR / UIR must be filed with the ATC Unit at the aerodrome of departure, or
- (IV 2) Alternatively, by direct arrangement between the operator and the local ATC Unit involved, a standard ICAO Flight plan may be stored at the aerodrome of departure and activated by that unit at 0001 UTC on the day of operation.

(v) CHANGES TO FLIGHT DETAILS

(V - 1) Permanent Changes

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

2 MAR 17

(V - 2) Changes of a permanent nature to any of the details previously supplied (under 1.4.1.1 or 1.4.2.2.2) require that complete details must be advised, both to the FDPU at Bahrain and to any other aerodrome concerned within the FIR, either by a completely new replacement plan. or by clear "insert / delete" editing instructions.

(VI) TEMPORARY CHANGES

- (VI 1) Extra flights require submission of both:
- a) a standard Flight Plan, and
- b) Flight date details to Bahrain FDPU
- (VI 2) Replacement flights, (i.e. Flights with temporary changes to details which have been submitted under 1.4.1.1 or 1.4.2.2.2) require:
- (a) A Standard Flight plan clearly annotated in ITEM 12, Replacement of Scheduled Flight (c / s)... of. (date);

Note: Flight Schedule Date Lists are required by ATSUs to prepare Air Traffic Control Date Systems in advance, thus reducing the possibility of traffic delay resulting from work - load in peak periods. Timely provision of Scheduled Flight Data, preferably more than the prescribed 14 days in advance, is therefore in the best interests of operators of scheduled air transport.

(VII) AFTN ADDRESSES

- (VII 1) All Flight Plans and Departure messages for flights operating through or within the BAHRAIN FIR / BAHRAIN UIR must include address OBBBZQZX.
- (VII 2) All aircraft operators intending to use BAHRAIN INTERNATIONAL airport as a departure aerodrome must include the address **OBBIZPZX** in their flight plan.
- (VII 3) New AFTN addresses have been installed at BAHRAIN / SAKHIR AIRBASE for the purpose of flight planning and other aviation related issues in the following form: OBKHZTZX for Control Tower, OBKHZPZX for AIS / COMMS and OBKHYFYX for Service Address.
- (VII 4) A new eight letter sequence AFTN address OBBINEMX is established for the purpose of Nuclear Emergency Message (NEM).

(VIII) FLIGHT PLAN FORM

- (VIII 1) The Flight Plan Form must be completed according to the instructions contained in DOC 4444 ATM / 501, Appendix 2.
- (VIII 2) The following options are REQUIRED by the ATS authority for all flights operating within the BAHRAIN FIR / BAHRAIN UIR:

(VIII - 3) Flight plan ITEM 8

The second field letter denoting the TYPE OF FLIGHT.

(VIII 4) Flight Plan ITEM 18

The indicator 'EET / ' followed by FIR / UIR boundary designators and accumulated elapsed times as follows:

- a) Flights entering the BAHRAIN FIR / BAHRAIN UIR: The location indicator for the BAHRAIN FIR / BAHRAIN UIR together with the accumulated estimated elapsed time since departure (e.g. EET / OBBB0345)
- Flights departing from within the BAHRAIN FIR: All boundary designators, together with the corresponding estimated elapsed times to those points. (e.g. for a flight from OBBI to EGLL, EET / OEJD0005 OJAC0125 OSTT0145 LCCC02010 LGGG0245 LTBB0300 LGGG0305 LYBA0345 LYZB0420 LOVV0540 EDDU0510 EBUR0545 EHAA0600 EGTT0615)
- c) All ACFT using BAHRAIN FIR / BAHRAIN UIR are reminded to strictly adhere to the requirements of including their relevant ACFT registration markings in item 18 of the flight plan, failure to do so will result in an anticipated delay.

(VIII - 5) Flight Plan ITEM 18

The indicator 'SEL/ 'followed by the SELCAL code.

(VIII - 6) Flight plan ITEM 19

To be completed in full.

PROCEDURES FOR NAVIGATION SERVICES: AIR TRAFFIC MANAGEMENT (DOC 4444 - ATM / 501)

Reference: Chapter 5 GENERAL PROVISIONS FOR THE SEPARATION OF CONTROLLED TRAFFIC

Difference:

1.1 No VMC climbs or descents will be permitted to aircraft operating within controlled airspace of the BAHRAIN FIR / BAHRAIN UIR while such aircraft are operating under Instrument Flight Rules.

Regional Supplementary Procedures (Doc 7030 / 4)

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS AIP BAHRAIN FIR GEN 1.7-3
17 SEP 15

The Supplementary Procedures in force, directly applicable to aircraft is given in their entirety. Differences are printed in heavy face italic type.

Doc 7030 part 1

1.1 Visual Flight Rules (VFR)

(Annex 2 - 4.6)

VFR flights to be operated within a control zone established at an aerodrome serving International Flights and in specified portions of the associated terminal control area shall:

- 1. have two way radio communications;
- 2. obtain clearance from the appropriate air traffic control unit; and
- 3. report positions as required.

Note: The phrase "specified portions of the associated terminal control area" is intended to signify at least those portions of the TMA used by International IFR Flights in association with approach, holding, departure and noise abatement procedures.

1.2.1.1 Instrument Flight Rules (IFR)

(Annex 2 - 2.2 and chapter 5)

Flights shall be conducted in accordance with the Instrument Flight Rules (even when not operating in instrument meteorological conditions) when operated:

- 1. more than 100 NM seaward from the shoreline within controlled airspace; or
- 2. at or above FL 150.

3.0 A / G communications and in - flight Reports

(PANS ATM / 501 Chapter 4, 4 - 11)

All aircraft on VFR flights, and aircraft on IFR flights outside controlled airspace, shall maintain a watch on a radio station furnishing communications for the unit providing a flight information service in the flight information region and file reports with that station including information as to their position unless otherwise authorized by the state overflown.

- 3.4.1.2 The aircraft call sign / identification shall be transmitted immediately before or after the word "position".
- 3.4.1.3 The position of the aircraft shall be transmitted in reference to a reporting point name, name code designator or, if not named:
- 1. For flights operating in a predominantly east west direction:
 - a) latitude in degrees and minutes, and
 - b) longitude in degrees only
- 2. For flights operating in a predominantly north south direction:
 - a) latitude in degrees only; and
 - b) longitude in degrees and minutes
- 3.4.1.4 The time at which the aircraft is over the reporting point shall be transmitted in four digits, giving both the hour and the minutes.
- 3.4.1.5 The altitude / flight level of the aircraft shall be included in the position report.
- 3.4.2.1 Next position and time shall normally be expressed as the reporting point name, name code designator or latitude and longitude as indicated in 3.4.1.3.
- 3.4.2.2 Estimated time over the next position shall be expressed in four digits.
- 3.4.3.1 Ensuing position information shall include the name, name code designator or coordinates of the next succeeding reporting point, whether compulsory or not.

4.0 Special Procedures for in - flight contingencies

General Procedures

The following general procedures apply to both subsonic and supersonic aircraft.

4.2.1 If an aircraft is unable to continue flight in accordance with its Air Traffic Control Clearance, a revised Clearance shall be obtained at the earliest possible time and, in the meantime, the aircraft shall broadcast position (including ATS route designator or the track code, as appropriate) and intentions, on frequency 121.500 MHZ at suitable intervals until Air Traffic Control Clearance is received.

GEN 1.7-4
AIP BAHRAIN FIR
2 MAR 17

12.1.1 Alerting and Search and Rescue Services - Routes and equipment of Private Aircraft

(Annex 6 - Part II - 6.3 and 6.4):

General Aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- 1. carry appropriate survival equipment
- 2. follow the routes or specified procedures if not equipped with two way radio except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.

12.2 Alerting Services

(PANS ATM / 501 Chapter 9 & Chapter 10, 10 - 2)

The procedures for "Alerting Service" detailed in the PANS RAC, Part VI, 2, are applicable to all flights except those conducted wholly in the vicinity of an aerodrome when exempted by an appropriate air traffic control unit.

Doc 7030 / 4, Part 3

1.1 Aircraft Observations and Reports

(Annex 3 - Chapter 5)

Aircraft within the BAHRAIN FIR / BAHRAIN UIR shall make and record routine observations at the ATS / MET reporting points indicated in the Regional Plan.

Regional Supplementary Procedures

Doc 7030 / 4 to Doc 7030 / 5

The Supplementary procedures in force are given in their entirety; differences are shown in **bold**.

ANNEX 3 - METEOROLOGICAL SERVICE FOR INTERNATIONAL AIR NAVIGATION (19th Edition July 2016)

NIL

ANNEX 4 - AERONAUTICAL CHARTS (11th Edition July 2009)

NIL

ANNEX 5 - UNITS MEASUREMENT TO BE USED IN AIR AND GROUND OPERATIONS (5th Edition JULY 2010)

NIL

ANNEX 6 - OPERATION OF AIRCRAFT Part I (10th Edition), Part II (9th Edition), Part III (8th Edition):

	Annex 6 Part 1: Operation of Aircraft (10 th Edition) (AMDT 40)						
ICAO Ref.	Category (Standard, Recommended Practice, etc)	Difference	Details of Difference	Comments / Status			
C4 4.7.1.1 4.7.1.2 4.7.2.1 4.7.2.2 4.7.2.3 4.7.2.4 4.7.2.5 and 4.7.2.6	Standard	Additional requirments for operations by aeroplanes with turbine engines beyond 60 minutes to an en-route alternate aerodrome including extended diversion time operations (EDTO)	Current Kingdom of Bahrain Air Navigation Technical Reg- ulations (ANTR-OPS 1) which details the corresponding pro- visions for ETOPS, is consid- ered as an acceptable means of compliance to the requir- ments of Annex 6 Part 1.	Currently, ETOPS is considered to be equivalent to EDTO for twin-turbine engine aeroplanes.			

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

	Annex 6 Part 1: Operation of Aircraft (10 th Edition) (AMDT 40)					
C4 4.7.2.7	Recommendation	Additional requirments for operations by aeroplanes with turbine engines beyond 60 minutes to an en-route alternate aerodrome including extended diversion time operations (EDTO)	Current Kingdom of Bahrain Air Navigation Technical Reg- ulations (ANTR-OPS 1) which details the corresponding pro- visions for ETOPS, is consid- ered as an acceptable means of compliance to the requir- ments of Annex 6 Part 1.	Currently ETOPS is considered to be equivalent to EDTO for twin-turbine engine aeroplanes.		

ANNEX 7 - AIRCRAFT NATIONALITY AND REGISTRATION MARKS (6th Edition JULY 2012)

NIL

ANNEX 8- AIRWORTHINESS OF AIRCRAFT (11th Edition)

NII

ANNEX 9 - FACILITATION (14th Edition OCTOBER 2015)

NIL

ANNEX 10 - AERONAUTICAL TELECOMMUNICATIONS Volume I RADIO NAVIGATION AIDS (6th Edition JULY 2006), Volume II COMMUNICATION PROCEDURES INCLUDING THOSE WITH PANS STATUS (7th Edition OCTOBER 2016), Volume III COMMUNICATION SYSTEMS (2nd Edition JULY 2007)

NIL

ANNEX 11 - AIR TRAFFIC SERVICES (14th Edition JULY 2016)

NIL

ANNEX 12 - SEARCH AND RESCUE (8th Edition JULY 2004)

NIL

ANNEX 13 - AIRCRAFT ACCIDENT AND INCIDENT INVESTIGATION (10th Edition)

NIL

ANNEX 14 - AERODROMES Volume I AERODROME DESIGN AND OPERATIONS (7th Edition JULY 2016), Volume II HELIPORTS (4th Edition JULY 2013)

NIL

ANNEX 15 - AERONAUTICAL INFORMATION SERVICES (15th Edition JULY 2016)

AD 2.10 AERODROME OBSTACLES

AD 2.10 Obstacle data not fully compliant. Reason for in compliance: Obstacle Area 2 to 4 assessment not yet completed. Work in progress.

ENR 5.4 AIR NAVIGATION OBSTACLES EN-ROUTE

ENR 5.4 Obstacle data not fully compliant. Obstacle Area 1 assessment not yet completed. Work in progress.

Chapter 8 Pre - flight Information Bulletin

8.1.3 Plain Language pre - flight information bulletins are currently available for the BAHRAIN FIR / BAHRAIN UIR only.

Note: Automated Pre - Flight BulletinS are presently provided on a test basis upon request.

ANNEX 16 - ENVIRONMENTAL PROTECTION VOLUME I AIRCRAFT NOISE (7th Edition JULY 2014), VOLUME II AIRCRAFT ENGINE EMISSIONS (3rd Edition 2008)

NIL

ANNEX 17 - SECURITY - SAFEGUARDING INTL. CIVIL AVIATION AGAINST ACTS OF UNLAWFUL INTERFERENCE (9th Edition March 2011)

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

GEN 1.7-6
AIP BAHRAIN FIR
2 MAR 17

NIL

ANNEX 18 - THE SAFE TRANSPORT OF DANGEROUS GOODS BY AIR (4th Edition July 2011)

NIL

ANNEX 19 - SAFETY MANAGEMENT (2nd Edition - July 2016)

NIL

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 2.1-1
17 SEP 15

GEN 2. TABLES AND CODES

GEN 2.1 MEASURING SYSTEM, AIRCRAFT MARKINGS, HOLIDAYS

2.1.1 UNITS OF MEASUREMENT

The following table of units of measurement will be used by aeronautical stations within BAHRAIN FIR / BAHRAIN UIR for air and ground operations.

FOR MEASUREMENT OF	UNITS USED
Distance used in navigation, position reporting, etc.	
Generally in excess of 2 nautical miles	Nautical Miles and tenth
Relatively short distances such as those relating to Aerodromes (e.g. runway lengths)	Metres
Altitudes, elevations and heights	Feet
Horizontal speed including wind speed	Knots or ratio MACH number
Vertical speed	Feet per minute
Wind direction for landing and taking off	Degrees Magnetic
Wind Direction except for landing and taking off	Degrees True
Visibility including runway visual range	Kilometres or metres
Altimeter setting	Hecto Pascals (HPA)
Temperature	Degrees Celsius
Weight	Metric tons or Kilograms
Time	Hours and Minutes, the day of 24 hours beginning at midnight UTC

2.1.2 TIME SYSTEM

General

Coordinated Universal Time (UTC) is used by air navigation services and in publication issued by the Aeronautical Information Service.

Reporting of time to the nearest minute, e.g. 12:40:35 is reported 1241.

When a " Date - Time Group " is required, two figures are used for each of the following, in this order; YEAR - MONTH - DAY - HOUR - MINUTE for example, twenty seven minutes past midnight on the third of December 1995 is down as "9512030027"

Local time in the Kingdom of Bahrain is UTC plus 3 hours.

2.1.3 HORIZONTAL REFERENCE SYSTEM

2.1.3.1 Name / designation of the reference system

All public geographical coordinates indicating latitude and longitude are expressed in terms of the World Geodetic system - 1984 (WGS - 84) geodetic reference datum except where indicated that the International 1909 spheroid is still extant.

2.1.3.2 Identification and parameters of the projection

To be developed.

2.1.3.3 Identification of the ellipsoid used

To be developed.

2.1.3.4 Identification of the datum used

To be developed.

GEN 2.1-2 AIP BAHRAIN FIR 17 SEP 15

2.1.3.5 Area of application

Area of application for the published geographical coordinates coincides with the area of responsibility of the Aeronautical Information Service, as well as the airspace over the high seas encompassed by the BAHRAIN FIR / BAHRAIN UIR in accordance with the regional air navigation agreement.

2.1.3.6 Use of asterisk to identify published geographical co - ordinates

An asterisk (*) will be used to identify those published geographical co - ordinates which have been transformed into WGS - 84 coordinates but whose accuracy of original field work does not meet the requirements in Annex 11, Chapter 2 and Annex 14, Volumes I and II, Chapter 2. Specifications for determination and reporting of WGS - 84 coordinates are given in Annex 11, Chapter 2 and Annex 14, Volume I and II, Chapter 2.

2.1.4 AIRCRAFT NATIONALITY AND REGISTRATION MARKS

The nationality mark for aircraft registered in the Kingdom of Bahrain is A 9 C (Alfa Nine Charlie).

2.1.5 PUBLIC HOLIDAYS

The following Public Holidays are fixed and applicable as indicated. Airport and ATC Facilities are unaffected. Additional Public Holidays that fall in accordance with the Islamic Calendar are published as an AIC.

HOLIDAY	DATE	DURATION OF HOLIDAY DAYS
GREGORIAN NEW YEAR	1 JAN	1
BAHRAIN LABOUR DAY	1 MAY	1
BAHRAIN NATIONAL DAY	16 DEC	2

GEN 2.2 ABBREVIATIONS USED IN AIS PUBLICATIONS

2.2.1. Abbreviations listed in DOC 8400, "ICAO Abbreviations and Codes", are used in the AIP Bahrain FIR, and in NOTAM.

Additionally, the following abbreviations may be used:

ACAS Airborne Collision Avoidance System ACRY Aerodrome Crash Rescue Vehicle A.D. Anno Domini (Gregorian Year) AD Aerodrome AED UAE Dirhams AGNIS Aircraft Sciudance Nose - in System A.H. Anno Hejir, (Muslim Year) A.H. Anno Hejir, (Muslim Year) AL. Armendment List APT Airport Ar Arabic ARANCO Arabian American Oil Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C CAA Chiil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pawement Detail HAA Height Above Aerodrome HAT Height Above Trieshold HI High Intensity High Pressure Oxygen J J J J Jet Fuel		oming approviations may be asset.
ACAS Airborne Collision Avoidance System ACRV Aerodrome Crash Rescue Vehicle A.D. Anno Domini (Gregorian Year) AD Aerodrome AED UAE Dirhams AGNIS Arraff Guidance Nose - in System A.H. Anno Hejir, (Muslim Year) AL Armendment List APT Airport Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient HAA Height Above Aerodrome HAA Height Above Aerodrome HAA Height Robove Aerodrome HAA Height Above Aerodrome HAA Height Robove Aerodrome HAA Height Robove Aerodrome HAA Height Above Aerodrome HAA Height Above Aerodrome HAA Height Above Tresshold HI High Intensity HIPOX International Civil Aviation Organisation J International Civil Aviation Organisation J		
ACRY Aerodrome Crash Rescue Vehicle AD. Anno Domini (Gregorian Year) AD. Aerodrome AED UAŁ Dirhams AGNIS Aircraft Guidance Nose - in System A.H. Anno Hejir, (Muslim Year) AL. Armendment List APT Airport Ar Arabic ARAMCO Arabian American Oli Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Cleanway D D DA Decision Allitude DH Decision Height DOC Document DOC Document DOC Document DOC Document DOC Document Fight Data Receiving Office F F F F F F F F F F F F F F F F F F	Α	
ACRY Aerodrome Crash Rescue Vehicle AD. Anno Domini (Gregorian Year) AD. Aerodrome AED UAŁ Dirhams AGNIS Aircraft Guidance Nose - in System A.H. Anno Hejir, (Muslim Year) AL. Armendment List APT Airport Ar Arabic ARAMCO Arabian American Oli Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Cleanway D D DA Decision Allitude DH Decision Height DOC Document DOC Document DOC Document DOC Document DOC Document Fight Data Receiving Office F F F F F F F F F F F F F F F F F F	1010	
A.D. Anno Domini (Gregorian Year) AD Aerodome AED UAE Dirhams AGNIS Aircraft Guidance Nose - in System A.H. Anno Height (Muslim Year) A.L. Ammendment List APT Airport Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H H H Height Above Aerodrome HAT Height Above Arroshold HI Height Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
AD Aerodrome AED UAE Dirhams AGNIS Aircraft Guidance Nose - in System A.H. Anno Hejir, (Muslim Year) AL Ammendment List APT Airport Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D DA Decision Attitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient HAA Height Above Aerodrome HAT Height Above Arroshold HI Height Hoestly HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	-	
ACINIS Arcraft Guidance Nose - in System AH. Anno Hejir, (Muslim Year) AL Ammendment List APT Airport Ar Arabic ARAMCO Arabian American Oil Company AVTUR AVIUR AVIUR AVIATION AVIATION AVIATION BB BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI Height Above Aerodrome HAT Height Above Threshold HI Height Pressure Oxygen I ICAO International Civil Aviation Organisation		
ACNIS Ancraft Guidance Nose - in System A.H. Anno Hejir, (Muslim Year) AL Ammendment List APT Airport Ar Arabic ARAMICO Arabian American Oil Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H H H H H H H H H H H H H H H H H H		
A.H. Anno Heijir, (Muslim Year) A.L. Ammendment List APT Airport Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI Height Above Aerodrome HAT Height Above Threshold HI Height Pressure Oxygen I ICAO International Civil Aviation Organisation		
AL Ammendment List APT Arbort AFT Arabic ARAMCO Arabian American Oil Company AVTUR AVTUR AVITUR AVITUR Aviation Jet Fuel B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX DUPLEX E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		Aircraft Guidance Nose - in System
APT Arport Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I III ICAO International Civil Aviation Organisation J		
Ar Arabic ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B BD Bahrain Dinars C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
ARAMCO Arabian American Oil Company AVTUR Aviation Jet Fuel B B BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
B B B B B B B B B B B B B B B B B B B		
BD Bahrain Dinars C CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		Arabian American Oil Company
BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D D D D D D D D D D D D D D D D D	AVTUR	Aviation Jet Fuel
BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D D D D D D D D D D D D D D D D D		
BD Bahrain Dinars C C CAA Civil Aviation Affairs CWY Clearway D D D D D D D D D D D D D D D D D D	R	
CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Aerodrome HAT Height Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
CAA Civil Aviation Affairs CWY Clearway D D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Aerodrome HAT Height Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	BD	Bahrain Dinars
CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		* *
CAA Civil Aviation Affairs CWY Clearway D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	C	
D DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	CWY	Clearway
DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
DA Decision Altitude DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	D	
DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	0	
DH Decision Height DOC Document DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	DA	Decision Altitude
DOC DVORTAC Doppler VOR and TACAN combination DX Duplex E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
DVORTAC Doppler VOR and TACAN combination DX Duplex E		
E e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Arroshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
E. g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		Dupley Volvalid (ACAN combination)
e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	DX	Duplex
e.g. Exempli Gratia (= for example) En English F FDRO Flight Data Receiving Office GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	E	
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	e.g.	Exempli Gratia (= for example)
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	En	English
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
FDRO Flight Data Receiving Office G GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	_	
GMC Ground Movement Control GRAND Gradient H Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	F	
GMC Ground Movement Control GRAND Gradient H Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	EDBO	Flight Data Receiving Office
GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	FDRO	Tright Data Neceving Office
GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
GMC Ground Movement Control GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	G	
GRAND Gradient H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
H h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	GMC	Ground Movement Control
h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	GRAND	Gradient
h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
h Pavement Detail HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	H	
HAA Height Above Aerodrome HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation	-	Devement Poteil
HAT Height Above Threshold HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation		
HI High Intensity HPOX High Pressure Oxygen I ICAO International Civil Aviation Organisation J		Height Above Aerodrome
I ICAO International Civil Aviation Organisation J		Height Above Threshold
I ICAO International Civil Aviation Organisation J		
ICAO International Civil Aviation Organisation J	HPOX	High Pressure Oxygen
ICAO International Civil Aviation Organisation J		
ICAO International Civil Aviation Organisation J	l 1	
J	•	
J	ICAO	International Civil Aviation Organisation
	1.57 (.5	International Office Organisation
JP 4 Jet Fuel	J	
JP 4 Jet Fuel		
	JP 4	Jet Fuel

L	
LCN	Load Classification Number
м	
IVI	
MAUW	Maximum All - Up Weight
MB	Millibars
MDA	Minimum Descent Altitude
0	
U	
OCA	Obstacle Clearance Altitude or Height
OCH	Obstacle Clearance Height
OCT	Octane
ORCAM	Originating Region Code Allocation Method
P	
PO	Post Office
PP	Prior Permission
PPO	Prior Permission Prior Permission Only
FFO	Filor Fermission Only
R	
R	Red
RAIM	Receiver autonomous integrity monitoring
RCAG	Remote Controlled Air / Ground (Transmitter / Receiver)
RDH	Reference datum height
RDL	Radial
REC	Receive
RIV *	Rapid Intervention Vehicle
RNAV	Area Navigation
RNP	Required Navigational Perfomance
RSR RTIL *	En - route surveillance radar
RVR	Runway threshold indicator lights
RVSM	Runway Visual Range Reduced Vertical Separation Minima
RWY	Runway
LZAA I	INUIWay
S	
SITA	Societe Internationale de Telecommunications Aeronautique
STR	Strength
Т	
1 -	
TBN	To Be Notified
TOR	Take - Off Run
TOP	Temporary Operating Permit
TL	Transition level
TRANS	Transmit
TWY	Taxiway
U	
٦	
UAE	United Arab Emirates
<u>-</u>	

Additional abbreviations used:


O / R On request

W / V Wind Velocity

2.2.2. When other abbreviations are used specific to a particular subject, a separate list is provided in the appropriate section of the AIP.

AIP BAHRAIN FIR GEN 2.3-1
17 AUG 17

GEN 2.3 CHART SYMBOLS

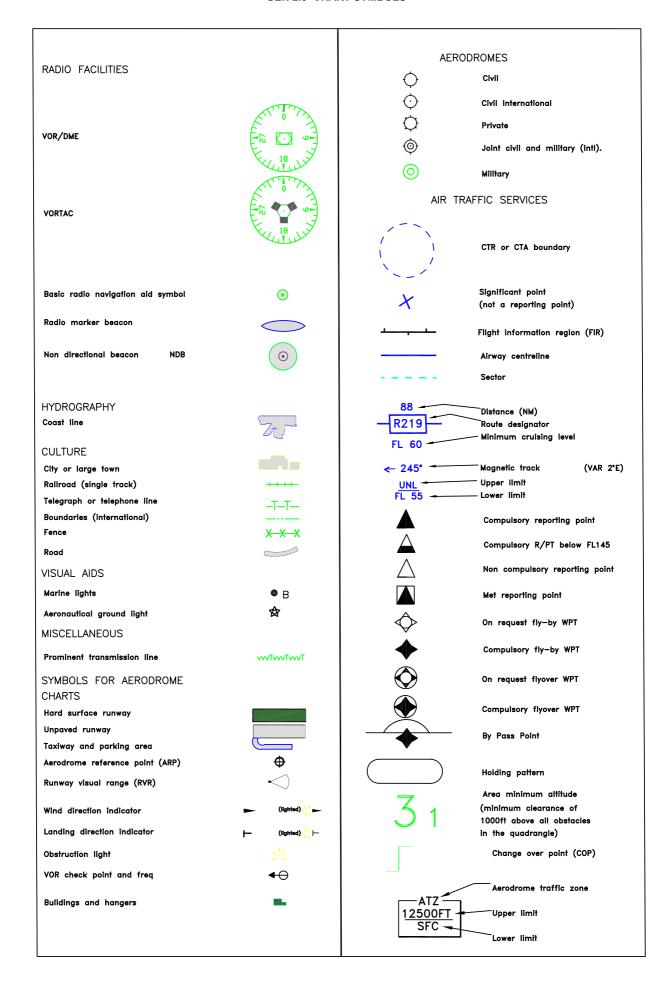

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17



AIP BAHRAIN FIR GEN 2.4-1 17 SEP 15

GEN 2.4 LOCATION INDICATORS

1. ENCODE		2. DECODE		
Location	Indicator	Indicator	Location	
BAHRAIN / ISA AIRBASE	OBBS	OBBB	BAHRAIN UIR	
BAHRAIN / SAKHIR AIRBASE	ОВКН	OBBB	BAHRAIN FIR	
BAHRAIN FIR	OBBB	OBBI	BAHRAIN INTERNATIONAL	
BAHRAIN INTERNATIONAL	ОВВІ	OBBS	BAHRAIN / ISA AIRBASE	
BAHRAIN UIR	ОВВВ	ОВКН	BAHRAIN / SAKHIR AIRBASE	



AIP BAHRAIN FIR GEN 2.5-1
26 APR 18

GEN 2.5 LIST OF RADIO NAVIGATION AIDS

ID	Station name	Aid	Purpose A=Aerodrome E=Enroute AE=Both	Station name	ID	Aid	Purpose A=Aerodrome E=Enroute AE=Both
BHR	BAHRAIN	DVOR/DME	AE	BAHRAIN	BHR	DVOR/DME	AE
DOH	DOHA/HAMAD INTL	DVOR/DME	AE	DOHA/HAMAD INTL	DOH	DVOR/DME	AE
IBIA	BAHRAIN INTERNATIONAL	ILS	A	BAHRAIN / ISA AIR- BASE	ISIB	ILS	А
IBIB	BAHRAIN INTERNATIONAL	ILS	А	BAHRAIN / SAKHIR AIRBASE	IKH	ILS	А
IKH	BAHRAIN / SAKHIR AIRBASE	ILS	A	BAHRAIN INTER- NATIONAL	IBIA	ILS	А
ISIB	BAHRAIN / ISA AIRBASE	ILS	A	BAHRAIN INTER- NATIONAL	IBIB	ILS	A
SI	ISA	L	А	ISA	SI	L	Α
SIA	ISA	VOR	Α	ISA	SIA	VOR	Α

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18



AIP BAHRAIN FIR GEN 2.6-1
17 SEP 15

GEN 2.6 CONVERSIONS OF UNIT OF MEASUREMENTS

Tables for conversions or alternately conversion formulae between:

2.6.1 Nautical miles to kilometres

Conversion tables for Nautical miles to Kilometres are based upon the following conversion factors:

1 NM = 1.852 KM

1 KM = 0.5400 NM

Nautical Miles to Kilometres		Kilometres to	Nautical Miles
NM	KM	КМ	NM
1.0	1.85	1.0	.54
1.1	2.04	1.1	.59
1.2	2.22	1.2	.65
1.3	2.41	1.3	.70
1.4	2.59	1.4	.76
1.5	2.78	1.5	.81
1.6	2.96	1.6	.86
1.7	3.15	1.7	.92
1.8	3.33	1.8	.97
1.9	3.52	1.9	1.03
2.0	3.70	2.0	1.08
2.1	3.89	2.1	1.13
2.2	4.07	2.2	1.19
2.3	4.26	2.3	1.24
2.4	4.44	2.4	1.30
2.5	4.63	2.5	1.35
3.0	5.56	3.0	1.62
4.0	7.41	4.0	2.16
5.0	9.26	5.0	2.70
6.0	11.11	6.0	3.24
7.0	12.96	7.0	3.78
8.0	14.82	8.0	4.32
9.0	16.67	9.0	4.86
10.0	18.52	10.0	5.40
15.0	27.78	15.0	8.10
20.0	37.04	20.0	10.80
25.0	46.30	25.0	13.50
30.0	55.56	30.0	16.20
35.0	64.82	35.0	18.90
40.0	74.08	40.0	21.60
		45.0	24.30

Nautical Miles to Kilometres		Kilometres to Nautical Miles	
		50.0	27.00
		55.0	29.70
		60.0	32.40
		65.0	35.10
		70.0	37.80

2.6.2 Feet to Metres

Conversion tables for Feet to Metres are based upon the following conversion factors:

1 FT = 0.3048 M

1 M = 3.281 FT

Feet to Metres			Metres to Feet
Feet	Metres	Metres	Feet
1	0.305	1	3.281
2	0.610	2	6.562
3	0.914	3	9.842
4	1.219	4	13.123
5	1.524	5	16.404
6	1.829	6	19.685
7	2.134	7	22.966
8	2.438	8	26.247
9	2.743	9	29.528
10	3.048	10	32.809
20	6.096	20	65.617
30	9.144	30	98.426
40	12.192	40	131.234
50	15.240	50	164.043
60	18.290	60	196.852
70	21.340	70	229.660
80	24.380	80	262.469
90	27.430	90	295.278
100	30.480	100	328.087
200	60.960	200	656.100
300	91.440	300	984.300
400	121.920	400	1.312.300
500	152.400	500	1.640.400
1,000	304.800	1,000	3.280.900
2,000	609.600	2,000	6.561.700
3,000	914.400	3,000	9.842.600
4,000	1.219.200	4,000	13.123.500

AIP BAHRAIN FIR GEN 2.6-3
17 SEP 15

Feet to Metres		Metres to Feet	
5,000	1.524.000	5,000	16.404.300

2.6.3 From decimal minutes of an arc to seconds of an arc

MIN	SEC	MIN	SEC	MIN	SEC	MIN	SEC
0.01	0.6	0.26	15.6	0.51	30.6	0.76	45.6
0.02	1.2	0.27	16.2	0.52	31.2	0.77	46.2
0.03	1.8	0.28	16.8	0.53	31.8	0.78	46.8
0.04	2.4	0.29	17.4	0.54	32.4	0.79	47.4
0.05	3.0	0.30	18.0	0.55	33.0	0.80	48.0
0.06	3.6	0.31	18.6	0.56	33.6	0.81	48.6
0.07	4.2	0.32	19.2	0.57	34.2	0.82	49.2
0.08	4.8	0.33	19.8	0.58	34.8	0.83	49.8
0.09	5.4	0.34	20.4	0.59	35.4	0.84	50.4
0.10	6.0	0.35	21.0	0.60	36.0	0.85	51.0
0.11	6.6	0.36	21.6	0.61	36.6	0.86	51.6
0.12	7.2	0.37	22.2	0.62	37.2	0.87	52.2
0.13	7.8	0.38	22.8	0.63	37.8	0.88	52.8
0.14	8.4	0.39	23.4	0.64	38.4	0.89	53.4
0.15	9.0	0.40	24.0	0.65	39.0	0.90	54.0
0.16	9.6	0.41	24.6	0.66	39.6	0.91	54.6
0.17	10.2	0.42	25.2	0.67	40.2	0.92	55.2
0.18	10.8	0.43	25.8	0.68	40.8	0.93	55.8
0.19	11.4	0.44	26.4	0.69	41.4	0.94	56.4
0.20	12.0	0.45	27.0	0.70	42.0	0.95	57.0
0.21	12.6	0.46	27.6	0.71	42.6	0.96	57.6
0.22	13.2	0.47	28.2	0.72	43.2	0.97	58.2
0.23	13.8	0.48	28.8	0.73	43.8	0.98	58.8
0.24	14.4	0.49	29.4	0.74	44.4	0.99	59.4
0.25	15.0	0.50	30.0	0.75	45.0		

From seconds of an arc to decimal minutes of an arc

SEC	MIN	SEC	MIN	SEC	MIN	SEC	MIN
1	0.02	16	0.27	31	0.52	46	0.77
2	0.03	17	0.28	32	0.53	47	0.78
3	0.05	18	0.30	33	0.55	48	0.80
4	0.07	19	0.32	34	0.57	49	0.82
5	0.08	20	0.33	35	0.58	50	0.83
6	0.10	21	0.35	36	0.60	51	0.85
7	0.12	22	0.37	37	0.62	52	0.87

SEC	MIN	SEC	MIN	SEC	MIN	SEC	MIN
8	0.13	23	0.38	38	0.63	53	0.88
9	0.15	24	0.40	39	0.65	54	0.90
10	0.17	25	0.42	40	0.67	55	0.92
11	0.18	26	0.43	41	0.68	56	0.93
12	0.20	27	0.45	42	0.70	57	0.95
13	0.22	28	0.47	43	0.72	58	0.97
14	0.23	29	0.48	44	0.73	59	0.98
15	0.25	30	0.50	45	0.75	60	1.00

2.6.4 Kilograms (KG) to Pounds (LB)

		Kilograms (KG)	to Pounds (LB)		
KG	LB	KG	LB	KG	LB
1	2.20	50	110.23	99	218.26
2	4.41	51	112.44	100	220.5
3	6.61	52	114.64	200	440.9
4	8.82	53	116.84	300	661.4
5	11.02	54	119.05	400	881.8
6	13.23	55	121.25	500	1.102.3
7	15.43	56	123.46	600	1.322.8
8	17.64	57	125.66	700	1.543.2
9	19.84	58	127.87	800	1.763.7
10	22.05	59	130.07	900	1.984.1
11	24.25	60	132.28	1.000	2.204.6
12	26.46	61	134.48	2.000	4.409.2
13	28.66	62	136.69	3.000	6.613.8
14	30.86	63	138.89	4.000	8.818.4
15	33.07	64	141.09	5.000	11.023.0
16	35.27	65	143.30	6.000	13.227.6
17	37.48	66	145.50	7.000	15.432.2
18	39.68	67	147.71	8.000	17.636.8
19	41.89	68	149.91	9.000	19.841.4
20	44.09	69	152.12	10.000	22.046.0
21	46.30	70	154.32		
22	48.50	71	156.53		
23	50.71	72	158.73		
24	52.91	73	160.94		
25	55.12	74	163.14		
26	57.32	75	165.35		
27	59.52	76	167.55		

		Kilograms (KG)	to Pounds (LB)		
KG	LB	KG	LB	KG	LB
28	61.73	77	169.75		
29	63.93	78	171.96		
30	66.14	79	174.16		
31	68.34	80	176.37		
32	70.55	81	178.57		
33	72.75	82	180.78		
34	74.96	83	182.98		
35	77.16	84	185.19		
36	79.37	85	187.39		
37	81.57	86	189.60		
38	83.78	87	191.80		
39	85.98	88	194.01		
40	88.18	89	196.21		
41	90.39	90	198.41		
42	92.59	91	200.62		
43	94.80	92	202.82		
44	97.00	93	205.03		
45	99.21	94	207.23		
46	101.41	95	209.44		
47	103.62	96	211.64		
48	105.82	97	213.85		
49	108.03	98	216.05		

2.6.5 Liquid

	LITRES	(L) to IMPEF	RIAL GALLO	ONS (IMP)		LITRES (L) to U.S GALLONS (U.S)					
L	IMP	L	IMP	L	IMP	L	U.S	L	U.S	L	U.S
1	0.22	50	11.00	99	21.78	1	0.26	50	13.21	99	26.16
2	0.44	51	11.22	100	22.00	2	0.53	51	13.47	100	26.42
3	0.66	52	11.44	200	44.00	3	0.79	52	13.74	200	52.84
4	0.88	53	11.66	300	66.00	4	1.06	53	14.00	300	79.26
5	1.10	54	11.88	400	88.00	5	1.32	54	14.27	400	105.68
6	1.32	55	12.10	500	110.00	6	1.59	55	14.53	500	132.10
7	1.54	56	12.32	600	132.00	7	1.85	56	14.80	600	158.52
8	1.76	57	12.54	700	154.00	8	2.11	57	15.06	700	184.94
9	1.98	58	12.76	800	176.00	9	2.38	58	15.32	800	211.36
10	2.20	59	12.98	900	198.00	10	2.64	59	15.59	900	237.78
11	2.42	60	13.20	1,000	220.00	11	2.91	60	15.85	1,000	264.2
12	2.64	61	13.42	2,000	440.00	12	3.17	61	16.12	2,000	528.4

	LITRES (L) to IMPER	IAL GALLO	NS (IMP)		LITRES (L) to U.S GALLONS (U.S)						
L	IMP	L	IMP	L	IMP	L	U.S	L	U.S	L	U.S	
13	2.86	62	13.64	3,000	660.00	13	3.44	62	16.38	3,000	792.6	
14	3.08	63	13.86	4,000	880.00	14	3.70	63	16.65	4,000	1.056.8	
15	3.30	64	14.08	5,000	1.100.00	15	3.96	64	16.91	5,000	1.321.0	
16	3.52	65	14.30	6,000	1,320.00	16	4.23	65	17.17	6,000	1.585.2	
17	3.74	66	14.52	7,000	1,540.00	17	4.49	66	17.44	7,000	1.849.4	
18	3.96	67	14.74	8,000	1,760.00	18	4.76	67	17.70	8,000	2.113.6	
19	4.18	68	14.96	9,000	1,980.00	19	5.02	68	17.97	9,000	2.377.8	
20	4.40	69	15.18	10,000	2,200.00	20	5.28	69	18.23	10,000	2.642.0	
21	4.62	70	15.40			21	5.55	70	18.49			
22	4.84	71	15.62			22	5.81	71	18.76			
23	5.06	72	15.84			23	6.08	72	19.02			
24	5.28	73	16.06			24	6.34	73	19.29			
25	5.50	74	16.28			25	6.61	74	19.55			
26	5.72	75	16.50			26	6.87	75	19.82			
27	5.94	76	16.72			27	7.13	76	20.08			
28	6.16	77	16.94			28	7.40	77	20.34			
29	6.38	78	17.16			29	7.66	78	20.61			
30	6.60	79	17.38			30	7.93	79	20.87			
31	6.82	80	17.60			31	8.19	80	21.14			
32	7.04	81	17.82			32	8.45	81	21.40			
33	7.26	82	18.04			33	8.72	82	21.66			
34	7.48	83	18.26			34	8.98	83	21.93			
35	7.70	84	18.48			35	9.25	84	22.19			
36	7.92	85	18.70			36	9.51	85	22.46			
37	8.14	86	18.92			37	9.78	86	22.72			
38	8.36	87	19.14			38	10.04	87	22.99			
39	8.58	88	19.36			39	10.30	88	23.25			
40	8.80	89	19.58			40	10.57	89	23.51			
41	9.02	90	19.80			41	10.83	90	23.78			
42	9.24	91	20.02			42	11.10	91	24.04			
43	9.46	92	20.24			43	11.36	92	24.31			
44	9.68	93	20.46			44	11.63	93	24.57			
45	9.90	94	20.68			45	11.89	94	24.84			
46	10.12	95	20.90			46	12.15	95	25.10			
47	10.34	96	21.12			47	12.42	96	25.36			
48	10.56	97	21.34			48	12.68	97	25.63			
49	10.78	98	21.56			49	12.95	98	25.89			

AIP BAHRAIN FIR GEN 2.6-7
17 SEP 15

2.6.6 Barometric

	HECTOPASCA	ALS (hPa) to INCHES (INS)	
hPa	INS	hPa	INS
948	27.99	1000	29.53
949	28.02	1001	29.56
950	28.05	1002	29.59
951	28.08	1003	29.62
952	28.11	1004	29.65
953	28.14	1005	29.68
954	28.17	1006	29.71
955	28.20	1007	29.74
956	28.23	1008	29.77
957	28.26	1009	29.80
958	28.29	1010	29.83
959	28.32	1011	29.86
960	28.35	1012	29.88
961	28.38	1013	29.91
962	28.41	1014	29.94
963	28.44	1015	29.97
964	28.47	1016	30.00
965	28.50	1017	30.03
966	28.53	1018	30.06
967	28.56	1019	30.09
968	28.59	1020	30.12
969	28.61	1021	30.15
970	28.64	1022	30.18
971	28.67	1023	30.21
972	28.70	1024	30.24
973	28.73	1025	30.27
974	28.76	1026	30.30
975	28.79	1027	30.33
976	28.82	1028	30.36
977	28.85	1029	30.39
978	28.88	1030	30.42
979	28.91	1031	30.45
980	28.94	1032	30.47
981	28.97	1033	30.50
982	29.00	1034	30.53
983	29.03	1035	30.56
984	29.06	1036	30.59

	HECTOPASCALS (h	Pa) to INCHES (INS)	
hPa	INS	hPa	INS
985	29.09	1037	30.62
986	29.12	1038	30.65
987	29.15	1039	30.68
988	29.18	1040	30.71
989	29.21	1041	30.74
990	29.23	1042	30.77
991	29.26	1043	30.80
992	29.29	1044	30.83
993	29.32	1045	30.86
994	29.35	1046	30.89
995	29.38	1047	30.92
996	29.41	1048	30.95
998	29.47	1050	31.01
999	29.50		

2.6.7 Temperature

		CELCIUS (C) to FAHRENHEIT (F)		
С	F	С	F	С	F
- 60	- 76.0	- 8	+ 17.6	+ 44	+ 111.2
- 59	- 74.2	- 7	+ 19.4	+ 45	+ 113.0
- 58	- 72.4	- 6	+ 21.2	+ 46	+ 114.8
- 57	- 70.6	- 5	+ 23.0	+ 47	+ 116.6
- 56	- 68.8	- 4	+ 24.8	+ 48	+ 118.4
- 55	- 67.0	- 3	+ 26.6	+ 49	+ 120.2
- 54	- 65.2	- 2	+ 28.4	+ 50	+ 122.0
- 53	- 63.4	- 1	+ 30.2	+ 51	+ 123.8
- 52	- 61.6	0	+ 32.0	+ 52	+ 125.6
- 51	- 59.8	+ 1	+ 33.8	+ 53	+ 127.4
- 50	- 58.0	+ 2	+ 35.6	+ 54	+ 129.2
- 49	- 56.2	+ 3	+ 37.4	+ 55	+ 131.0
- 48	- 54.4	+ 4	+ 39.2	+ 56	+ 132.8
- 47	- 52.6	+ 5	+ 41.0	+ 57	+ 134.6
- 46	- 50.8	+ 6	+ 42.8	+ 58	+ 136.4
- 45	49.0	+ 7	+ 44.6	+ 59	+ 138.2
- 44	- 47.2	+ 8	+ 46.4	+ 60	+ 140.0
- 43	- 45.4	+ 9	+ 48.2	+ 61	+ 141.8
- 42	- 43.6	+ 10	+ 50.0	+ 62	+ 143.6
- 41	- 41.8	+ 11	+ 518	+ 63	+ 145.4

		CELCIUS (C)	to FAHRENHEIT (F)		
С	F	С	F	С	F
- 40	- 40.0	+ 12	+ 53.6	+ 64	+ 147.2
- 39	- 38.2	+ 13	+ 55.4	+ 65	+ 149.0
- 38	- 36.4	+ 14	+ 57.2	+ 66	+ 150.8
- 37	- 34.6	+ 15	+ 59.0	+ 67	+ 152.6
- 36	- 32.8	+ 16	+ 60.8	+ 68	+ 154.4
- 35	- 31.0	+ 17	+ 62.6	+ 69	+ 156.2
- 34	- 29.2	+ 18	+ 64.4	+ 70	+ 158.0
- 33	- 27.4	+ 19	+ 66.2		
- 32	- 25.6	+ 20	+ 68.0		
- 31	- 23.8	+ 21	+ 69.8		
- 30	- 22.0	+ 22	+ 71.6		
- 29	- 20.2	+ 23	+ 73.4		
- 28	- 18.4	+ 24	+ 75.2		
- 27	- 16.6	+ 25	+ 77.0		
- 26	- 14.8	+ 26	+ 78.8		
- 25	- 13.0	+ 27	+ 80.6		
- 24	- 11.2	+ 28	+ 82.4		
- 23	- 9.4	+ 29	+ 84.2		
- 22	- 7.6	+ 30	+ 86.0		
- 21	- 5.8	+ 31	+ 87.8		
- 20	- 4.0	+ 32	+ 89.6		
- 19	- 2.0	+ 33	+ 91.4		
- 18	- 0.4	+ 34	+ 93.2		
- 17	+ 1.4	+ 35	+ 95.0		
- 16	+ 3.2	+ 36	+ 96.8		
- 15	+ 5.0	+ 37	+ 98.6		
- 14	+ 6.8	+ 38	+ 100.4		
- 13	+ 8.6	+ 39	+ 102.2		
- 12	+ 10.4	+ 40	+ 104.0		
- 11	+ 12.2	+ 41	+ 105.8		
- 10	+ 14.0	+ 42	+ 107.6		
- 9	+ 15.8	+ 43	+ 109.4		



AIP BAHRAIN FIR GEN 2.7-1 17 SEP 15

GEN 2.7 SUNRISE / SUNSET

			Sunrise / Ta	ibles BAHF OB 261615N (BI	RNATIONA	L				
Month	Day	вмст	SR	ss	EECT	Month	Day	вмст	SR	SS	EECT
JAN	1	0300	0325	1356	1422	JUL	1	0122	0148	1534	1600
	6	0301	0327	1400	1425		6	0124	0150	1534	1600
	11	0302	0327	1404	1428		11	0126	0152	1534	1559
	16	0302	0327	1407	1423		16	0128	0154	1532	1558
	21	0301	0326	1411	1436		21	0131	0157	1531	1556
	26	0300	0325	1415	1440		26	0134	0159	1528	1553
	31	0259	0323	1419	1443		31	0137	0202	1526	1550
FEB	1	0258	0323	1420	1444	AUG	1	0137	0203	1525	1550
	6	0256	0320	1423	1447		6	0140	0205	1522	1546
	11	0253	0317	1427	1451		11	0143	0207	1518	1542
	16	0249	0313	1430	1454		16	0145	0210	1514	1538
	21	0246	0309	1434	1457		21	0148	0212	1509	1533
	26	0241	0305	1437	1500		26	0150	0214	1504	1528
							31	0153	0216	1459	1523
MAR	1	0239	0302	1438	1502	SEP	1	0153	0217	1458	1522
	6	0234	0257	1441	1504		6	0156	0219	1453	1516
	11	0229	0252	1444	1507		11	0158	0221	1447	1510
	16	0223	0247	1446	1510		16	0200	0223	1441	1505
	21	0218	0241	1449	1512		21	0202	0225	1436	1459
	26	0213	0236	1451	1514		26	0204	0227	1430	1453
	31	0207	0230	1454	1517						
APR	1	0206	0229	1454	1517	ОСТ	1	0206	0230	1425	1448
	6	0201	0224	1456	1520		6	0209	0232	1419	1442
	11	0155	0219	1459	1523		11	0211	0234	1414	1437
	16	0150	0214	1501	1525		16	0213	0237	1409	1432
	21	0145	0209	1504	1528		21	0216	0240	1405	1428
	26	0140	0205	1506	1531		26	0219	0242	1400	1424
							31	0222	0245	1356	1420
MAY	1	0136	0201	1509	1534	NOV	1	0222	0246	1356	1419
	6	0132	0157	1512	1537		6	0226	0249	1352	1416
	11	0128	0153	1515	1540		11	0229	0253	1350	1414
	16	0125	0151	1517	1543		16	0232	0256	1347	1412
	21	0123	0148	1520	1545		21	0236	0300	1346	1411
	26	0121	0146	1523	1548		26	0239	0304	1345	1410
	31	0119	0145	1525	1551						

	Sunrise / Tables BAHRAIN INTERNATIONAL OBBI 261615N 0503801E										
Month	Day	вмст	SR	SS	EECT	Month	Day	вмст	SR	SS	EECT
JUN	1	0119	0145	1526	1551	DEC	1	0243	0308	1345	1410
	6	0118	0144	1528	1554		6	0246	0311	1345	1410
	11	0118	0144	1530	1556		11	0249	0315	1346	1411
	16	0118	0144	1532	1558		16	0252	0318	1348	1413
	21	0119	0145	1533	1559		21	0255	0321	1350	1415
	26	0120	0146	1534	1600		26	0258	0323	1353	1418
							31	0259	0325	1356	1421

Note: All times are UTC

BMCT = Begining Morning Civil Twilight

EECT = Ending Evening Civil Twilight

SR = Sunrise
SS = Sunset

AIP BAHRAIN FIR GEN 3.1-1
2 MAR 17

GEN 3. SERVICES

GEN 3.1 AERONAUTICAL INFORMATION MANAGEMENT

3.1.1 RESPONSIBLE SERVICE

3.1.1.1 The Aeronautical Information Management which forms part of the Civil Aviation Affairs of the Kingdom of Bahrain, ensures the flow of information necessary for the safety, regularity and efficiency of international air navigation within the area of its responsibility indicated under **GEN 3.1.1.2** below. It consists of AIM Headquarters, International NOTAM Office (NOF) and AIM units established at aerodromes as listed under **GEN 3.1.5** below.

3.1.1.2 AIM Headquarters

AERONAUTICAL INFORMATION MANAGEMENT

P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321180 / 1 / 2
Telefax:+973 17323876
AFS: OBBBYNYX
e-mail: sdc@mtt.gov.bh
Http: www.bahrainaims.com

NOTAM: OBZZNAXX

SNOWTAM: OBZZSNXX

3.1.2 AREA OF RESPONSIBILITY OF AIM

The Aeronautical Information Management is responsible for the collection and dissemination of information for the BAHRAIN FIR / BAHRAIN UIR.

3.1.3 AERONAUTICAL PUBLICATIONS

- 3.1.3.1 The aeronautical information is provided in the form of the Integrated Aeronautical Information Package consisting of the following elements:
- An electronic Aeronautical Information Publication (electronic AIP);
- An electronic Amendment Service to the electronic AIP (AIP AMDT);
- An electronic Supplement Service to the electronic AIP (AIP SUP);
- NOTAM, and Pre Flight Information Bulletins (PIB);
- · An electronic Aeronautical Information Circulars (AIC) Service; and
- Check lists and summaries

NOTAM and the related monthly checklists are issued via the Aeronautical Fixed Service (AFS) while PIB are made available at aerodrome AIM units. All other elements of the package are published on the internet.

3.1.3.2 Electronic Aeronautical Information Publication (electronic AIP)

The electronic AIP is the basic aviation document intended primarily to satisfy international requirements for the exchange of permanent aeronautical information and long duration temporary changes essential for air navigation.

The electronic AIP BAHRAIN FIR is available in HTML format. The HTML version and and a PDF version derived therefrom is published on the internet, and can be found at http://www.bahrainaims.com. The HTML version is the primary method of publication of the electronic AIP BAHRAIN FIR.

Electronic AIP Bahrain FIR

This electronic AIP, issued in English only, is the basic aeronautical information document for the BAHRAIN FIR / BAHRAIN UIR, for use in international and domestic operations whether the flight is a commercial or a private one and contains lasting information essential to air navigation.

3.1.3.3 Amendment service to the electronic AIP (AIP AMDT)

Amendments to the electronic AIP (AIP AMDT) are published on the internet. Two types of electronic AIP AMDT are produced:

- 1. Electronic Regular AIP Amendments (AIP AMDT) are issued in accordance with the established regular interval (ref. **GEN 0.1**), and incorporate permanent changes into the electronic AIP at the indicated publication date;
- 2. Electronic AIRAC AIP Amendments (AIRAC AIP AMDT) are issued in accordance with the AIRAC system, identified by the acronym AIRAC, and incorporate operationally significant permanent changes into the electronic AIP at the indicated AIRAC effective date.

A brief description of the subjects affected by the amendment is given on the electronic AIP Amendment cover sheet.

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

2 MAR 17

Each electronic AIP amendment cover sheet includes references to the serial number of those elements, if any, of the Integrated Aeronautical Information Package which have been incorporated in the electronic AIP by the amendment and are consequently cancelled.

Each AIP AMDT and each AIRAC AIP AMDT will be allocated separate two digit serial numbers which are consecutive in line with the AIRAC cycle. This will be followed by a two digit number to denote the year of issue or validity, e.g. AIP AMDT 01 / 11; AIRAC AIP AMDT 01 / 11. This new system will supersede the old system (which used a continuous sequence of numbers).

For further details refer to the electronic AIP BAHRAIN FIR version on the internet and its Help section.

3.1.3.4 Electronic Supplement Service to the electronic AIP (AIP SUP)

Temporary changes of long duration (three months and longer) and information of short duration which consists of extensive text and / or graphics, supplementing the permanent information contained in the electronic AIP are published as electronic AIP Supplements (AIP SUP). Operationally significant temporary changes to the electronic AIP are published in accordance with the AIRAC system and its established effective dates and are identified clearly by the acronym AIRAC.

Electronic AIP Supplements are separated by information subject (General - GEN, En-route - ENR and Aerodromes - AD). In a similar manner to AIP AMDT, each Supplement (regular or AIRAC) is allocated a serial number which is consecutive and based on the calendar year, i. e. AIRAC AIP SUP 01 / 11.

Electronic AIP Supplements are kept in the AIP as long as all or some of their contents remain valid. The period of validity of information contained in the electronic AIP Supplement will normally be given in the supplement itself. Alternatively, NOTAM may be used to indicate changes to the period of validity or cancellation of the supplement.

The checklist of electronic AIP Supplements currently in force is issued additionally by the medium of the monthly printed plain language summary of NOTAM in force.

Electronic AIP Supplements are placed on the desktop of the electronic AIP as a separate subject item under the electronic AIP Tabulator "SUP". For further details refer to the electronic AIP BAHRAIN FIR version on the internet and its Help section.

3.1.3.5 NOTAM and Pre - flight Information Bulletins (PIB)

NOTAM contain the information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential for personnel concerned with flight operations. The text of each NOTAM contains the information in the order shown in the ICAO NOTAM Format and is composed of the significations / uniform abbreviated phraseology assigned to the ICAO NOTAM Code complemented by ICAO abbreviations, indicators, designators, call signs, frequencies, figures and plain language. NOTAM are originated and issued for BAHRAIN FIR / BAHRAIN UIR and are distributed in one series which is identified by the letter A.

Series A

All NOTAM information for domestic and international use pertinent to flight within the BAHRAIN FIR / BAHRAIN UIR.

NOTAM S (SNOWTAM) contains information concerning snow, slush, ice or standing water associated with snow, slush and ice in the movement areas. The local climate precludes the issue of NOTAM S in the BAHRAIN FIR / BAHRAIN UIR.

Pre - flight Information Bulletins (PIB), which contain a recapitulation of current NOTAM and other information of urgent character to the operator / flight crews, are available at the Aerodrome AIS Units. The extent of the information contained in the PIB is indicated in subsection 5.

3.1.3.6 Electronic Aeronautical Information Circulars (AIC)

The electronic Aeronautical Information Circulars (AIC) contain information of long - term forecast of any major change in legislation, regulations procedures or facilities; purely explanatory or advisory nature liable to affect flight safety; and information or notification of an explanatory or advisory nature concerning technical, legislative or purely administrative matters. AICs are divided in accordance with subjects and their affects and are issued in one series (A).

Each electronic AIC is numbered consecutively on a calendar year basis. The year, indicated by two digits, is a part of serial number of the AIC, e.g. AIC 1 / 11. A checklist of AIC currently in force is issued as an AIC once a year.

Electronic AIC are placed on the desktop of the electronic AIP accordingly as a separate item under the eAIP Tabulator "AIC". For further details refer to the electronic AIP BAHRAIN FIR version on the internet and its Help section.

3.1.3.7 Checklist of NOTAMS

A checklist of NOTAM is issued monthly via AFS. This checklist contains all valid NOTAMS, latest AIP AMDT, latest AIP SUP and AIC.

3.1.3.8 Summary of NOTAM

Summary of NOTAM is published on the official website. It contains a plain language (in English) presentation of the valid NOTAM and information about the latest AIRAC AIP AMDT, AIC issued and checklist of AIP SUP.

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 3.1-3
2 MAR 17

3.1.3.9 Publication Sale

All publications can be obtained from the following official website in both HTML and PDF versions and is free of charge to all users. www.bahrainaims.com

3.1.4 THE AIRAC SYSTEM

3.1.4.1 In order to control and regulate the flow of operationally significant changes requiring amendments to charts, route - manuals etc., such changes, whenever possible, will be issued on predetermined dates according to the AIRAC SYSTEM.

Whenever possible this type of information will be published as an AIRAC AIP AMDT / SUP. If an AIRAC AMDT / SUP cannot be produced due to lack of time on a predetermined date, a NIL AIRAC notification NOTAM will be issued one cycle before the effective date of the AIRAC concern.

3.1.4.2 The table overleaf indicates AIRAC effective dates for the coming years. AIRAC information will be issued so that the information will be received by user not later than 28 days, and major changes not later than 56 days, before the effective date.

At AIRAC effective dates, a Trigger NOTAM will be issued giving a brief description of the contents, effective date and cross reference number of the AIRAC AIP AMDT or AIRAC AIP SUP that will become effective on that particular date.

Schedule of AIRAC effective dates

	2014	2015	2016	2017	2018	2019
1	09-Jan	08-Jan	07-Jan	05-Jan	04-Jan	03-Jan
2	06-Feb	05-Feb	04-Feb	02-Feb	01-Feb	31-Jan
3	06-Mar	05-Mar	04-Mar	02-Mar	01-Mar	28-Feb
4	03-Apr	02-Apr	31-Mar	30-Mar	29-Mar	28-Mar
5	01-May	30-Apr	28-Apr	27-Apr	26-Apr	25-Apr
6	29-May	28-May	26-May	25-May	24-May	23-May
7	26-Jun	25-Jun	23-Jun	22-Jun	21-Jun	20-Jun
8	24-Jul	23-Jul	21-Jul	20-Jul	19-Jul	18-Jul
9	21-Aug	20-Aug	18-Aug	17-Aug	16-Aug	15-Aug
10	18-Sep	17-Sep	15-Sep	14-Sep	13-Sep	12-Sep
11	16-Oct	15-Oct	13-Oct	12-Oct	11-Oct	11-Oct
12	13-Nov	12-Nov	10-Nov	09-Nov	08-Nov	07-Nov
13	11-Dec	10-Dec	08-Dec	07-Dec	06-Dec	05-Dec

If no information was submitted for publication at the AIRAC date, a NIL notification will be issued by NOTAM not later than one AIRAC cycle before the AIRAC effective date concerned.

3.1.5 PRE - FLIGHT INFORMATION SERVICE AT AERODROMES / HELIPORTS

3.1.5.1 NOTAM ARE ADDRESSED TO AND RECEIVED FROM THE FOLLOWING NOTAM OFFICES:

Addis Ababa	Brussels	Greenland	Laos	Paris	Tokyo
Algier	Bucharest	Harare	Lilongwe	Prague	Toronto
Amman	Budapest	Helsinki	Lisbon	Riga	Tripoli
Amsterdam	Cairo	Ho Chi Minh	London	Rome	Tunis
Ankara	Casablanca	Hong Kong	Luqa	Sanaa	U.A.E.
Athens	Colombo	Iceland	Lusaka	Seeb	Vienna
Auckland	Copenhagen	Jakarta	Macau	Seoul	Vilnius
Baghdad	Damascus	Jeddah	Madras	Seychelles	Warsaw

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

2 MAR 17

Bangkok	Dar - es - Salaam	Johannesburg	Madrid	Shannon	Windhoek
Beijing	Dhaka	Kabul	Male	Singapore	Yangon
Beirut	Dublin	Karachi	Manila	Slovakia	Zurich
Belgrade	Entebbe	Kathmandu	Maputo	Slovenia	
Bombay	Frankfurt	Khartoum	Melbourne	Sofia	
Brisbane	Gaborone	Kuala Lumpur	Moskow	Stockholm	
Brunei		Kuwait	Nairobi	Sydney	
			Nicosia	Taipei	
				Tehran	

3.1.5.2 NOTAM are additionally received from:

3.1.5.3 NOTAM are additionally addressed to:

Dallas Fort Worth	Kota Kinabalu	Luxembourg	Moscow
Ottawa	Shanghai	Washington	Vientiane

3.1.5.4 NOTAM are received from the following offices in the USA

ARTCC Boston	Corpus Christie	New York JFK	
ARTCC Houston	Dallas Fort Worth	Newark	
ARTCC Miami	Dayton	Newburgh	
ARTCC New York	Detroit	Norfolk	
ARTCC Washington	Greensboro	Philadelphia	
Atlanta	Houston Intercontinental	Pittsburgh	
Baltimore	Indianapolis	Raleigh / Durham	
Bangor	Knoxville	San Antonio	
Birmingham	Memphis	St Louis Lambert	
Boston	Minneapolis	Tampa	
Chicago O'Hare	Nashville	Washington	
Cincinnati	New Orleans		
Cleveland			

- 3.1.5.5 A self - briefing pre - flight information service is available at BAHRAIN INTERNATIONAL airport with the coverage indicated below:
- BAHRAIN: Complete coverage as for BAHRAIN INTERNATIONAL NOTAM OFFICE. See GEN 3.1.5.1 to GEN 3.1.5.4. 3.1.5.5.1
- 3.1.5.6 Pre - flight Information Bulletins (PFIBs)
- In addition to the self briefing pre flight information service, a comprehensive tailored pre flight briefing is available to 3.1.5.6.1 scheduled operators from BAHRAIN INTERNATIONAL airport. Application for service should be made to the Airport AIM / MET Briefing Office:

AIM / MET Briefing P.O. Box 586

AIRAC AMDT 03/17 **CIVIL AVIATION AFFAIRS** AIP BAHRAIN FIR GEN 3.1-5
2 MAR 17

Kingdom of Bahrain

TEL: +973 17321181 / +973 17321182 and +973 17321178

Telefax:+973 17323876

3.1.5.6.2 Bahrain Integrated Aeronautical Information Package is available on: www.bahrainaims.com

3.1.5.7 Accuracy of Information

3.1.5.7.1 The AIP BAHRAIN FIR and associated NOTAM are compiled from the variety of sources. Except for Bahrain, all information is acquired from independent states and from commercial sources. The greatest care is exercised in the assembly and compilation of information for the AIP BAHRAIN FIR and associated NOTAM and they are considered to be as reliable as possible at the time of issue. Civil Affairs will not be held responsible, however, for the accuracy of the contents of the AIP BAHRAIN FIR or NOTAM or for any omissions therefrom, neither will Civil Aviation Affairs be responsible for the adequacy or receipt of NOTAM or AIP amendments.

- 3.1.5.7.2 Any errors or om missions discovered should be notified without delay to the AIM Department or to Civil Aviation Affairs.
- 3.1.5.7.3 To further enhance the quality of the services provided by AIM, Bahrain has implemented ISO 9001 : 2008 to AIM, should any comments or suggestions arise, please do not hesitate to mail or email us at the following address:

AERONAUTICAL INFORMATION MANAGEMENT

P.O. Box 586
Kingdom of Bahrain
e-mail: sdc@mtt.gov.bh
Http: www.bahrainaims.com

3.1.6 ELECTRONIC TERRAIN AND OBSTACLE DATA (ETOD)

3.1.6.1 Air Navigation Obstacles and Electronic Terrain Data Sets of Bahrain may be obtained from:

AERONAUTICAL INFORMATION MANAGEMENT - Air Navigation Bahrain Civil Aviation Affairs P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321180 / +973 17321181 Telefax:+973 17329977 / +973 17323876

e-mail: etod@mtt.gov.bh sdc@mtt.gov.bh

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17



AIP BAHRAIN FIR GEN 3.2-1
2 MAR 17

GEN 3.2 AERONAUTICAL CHARTS

3.2.1 RESPONSIBLE SERVICE

Civil Aviation Affairs of Bahrain provides a wide range of aeronautical charts for use by all types of Bahrain Civil Aviation Affairs. The Aeronautical Information Service produces the charts which are part of the AIP. For addresses see **GEN 3.2.3** below.

The charts are produced in accordance with the provisions contained in the following ICAO documents: Annex 4 - Aeronautical Charts. Differences to these provisions are detailed in section **GEN 1.7**.

3.2.2 MAINTENANCE OF CHARTS

- 3.2.2.1 The aeronautical charts included in the AIP are kept up to date by amendments by AIP. Corrections to aeronautical charts not contained in the AIP are promulgated by AIP Amendments and are listed under **GEN 3.2.7** of this section. Information concerning the planning for or issuance of new maps and charts are notified by Aeronautical Information Circular.
- 3.2.2.2 Incorrect information detected on published charts are corrected by NOTAM if they are of operational significance.

3.2.3 PURCHASE ARRANGEMENTS

3.2.3.1 The charts contained in the AIP BAHRAIN FIR may be obtained from the:

Aeronautical Information Management P.O. Box 586

Kingdom of Bahrain

TEL: +973 17321180 / +973 17321181 / +973 17321182

Telefax:+973 17323876 AFS: OBBBYNYX

The charts listed under GEN 3.2.5 of this section may be obtained through the following accredited chart agents:

a) Edward Stanford Ltd.

12 - 14 Long Acre, London, WC 2 E 9 L P., UK

b) British Airways (Aerad) (S 464),

P.O. Box 10, Aerad House,

Heathrow Airport

Hounslow, Middlesex

TW 6 2 JA, UK

c) Airtour International Ltd.,

Elstree Aerodrome,

Elstree,

Herts, WD 6 3 AW, UK

d) British Light Aviation Centre,

Artillery Manisions,

Victoria Street,

London SW 1, UK

3.2.3.2 Civil Aviation Affairs, the Aeronautical Information Service and the sales agents have copies of the ICAO Catalogue (ICAO Doc 7101 - MAP / 565) wherein are listed all aeronautical charts or chart series produced by this and other countries, and known to be generally available to Civil Aviation.

3.2.4 AERONAUTICAL CHART SERIES AVAILABLE

- 3.2.4.1 The following series of aeronautical charts are acknowledged:
- a) World Aeronautical Chart ICAO 1: 1.000.000
- b) Plotting Chart ICAO
- c) Aerodrome / Heliport Chart ICAO
- d) Aerodrome Ground Movement Chart ICAO

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

17 SEP 15

- e) Aircraft Parking / Docking Chart ICAO
- Aerodrome Obstacle Chart ICAO Type A f)
- Aerodrome Obstacle Chart ICAO Type C
- h) Precision Approach Terrain Chart ICAO
- En-route Chart ICAO i)
- Area Chart ICAO (departure, arrival and transit routes) j)
- Instrument Approach Chart ICAO (for each runway and procedure type) k)
- I) Visual Approach Chart - ICAO

The charts currently available are listed under AD 2.24 of each aerodrome.

3.2.4.2 General description of each Series

a) World Aeronautical Chart ICAO 1: 1.000.000

The World Aeronautical Chart ICAO 1: 1.000.000 series is constructed on Lambert Conical Orthomorphic Projection up to 80° N and Polar Stereographic Projection between 80° N and 90° N with the scales matching at 80° N. The aeronautical data shown has been kept to a minimum, consistent with the use of the chart for visual air navigation. It includes a selection of aerodromes, significant obstacles, elements of the ATS system, prohibited, restricted and danger areas and radio navigation aids. The chart provides information to satisfy visual air navigation and is also used as a pre - flight planning chart.

b) Plotting Chart - ICAO

This series, covering the North Atlantic, Western Europe and North Africa is designed for in - flight long range navigation and is constructed on Mercator's projection with simple outline of land areas at a scale of 1:5.000.000. Aeronautical data consist of major international aerodromes, selected radio navigation aids, lattices of long range electronic aids to navigation, FIR, CTA, CTR, reporting points, etc. The chart is designed to provide a means of maintaining a continuous flight record of the aircraft position.

c) Aerodrome / Heliport Chart - ICAO

The Aerodrome / Heliport Chart - ICAO contains detailed Aerodrome / Heliport data to provide flight crew with information which will facilitate the ground movement of aircraft:

- a) from aircraft stand to the runway; and
- b) from the runway to the aircraft stand;

and helicopter movement:

- a) from the helicopter stand to the touchdown and lift off area and to the final approach and take off area;
- b) from the final approach and take off area to the touchdown and lift off area and to the helicopter stand;
- c) along helicopter ground and air taxiways; and
- d) along air transit routes;

It also provides essential operational information at the aerodrome / heliport.

d) Aerodrome Ground Movement Chart - ICAO

The Aerodrome Ground Movement Chart - ICAO is produced for those aerodromes where, due to congestion of information, details necessary for the ground movement of aircraft along the taxiways to and from the aircraft stands and the parking / docking of aircraft, cannot be shown with sufficient clarity on the Aerodrome / Heliport Chart - ICAO.

Aircraft Parking / Docking Chart - ICAO

This chart is produced for those aerodromes where, due to the complexity of the terminal facilities the information to facilitate the ground movement of aircraft between the taxiways and the aircraft stands and the parking / docking of aircraft cannot be shown with sufficient clarity on the Aerodrome / Heliport Chart - ICAO or on Aerodrome Ground Movement Chart - ICAO.

Aerodrome Obstacle Chart - ICAO, Type A (Operating Limitations)

This chart contains detailed information of obstacles in the take - off flight path areas of aerodromes. It is shown in plan and profile view. This obstacle information, in combination with an Obstacle Chart - ICAO, Type C provides the data necessary to enable an operator to comply with the operating limitations of Annex 6, Parts I and II, Chapter 5.

g) Aerodrome Obstacle Chart - ICAO, Type C

This chart contains obstacles data necessary to enable an operator to develop procedures to comply with operating limitations of Annex 6, Parts I and II, Chapter 5 with particular reference to information on obstacles that limit the maximum permissible take - off mass. This chart must provide certain obstacle data and topographical information covering a distance of 45 KM (24 NM) from the aerodrome reference point.

Appropriate topographical charts which are available for the area around the airports, if supplemented with "overprint" obstacle data and other significant aeronautical information, should be suitable for use as the topographic base for the AOC - ICAO, Type C. The chart is not produced if:

AIP BAHRAIN FIR GEN 3.2-3
17 SEP 15

- a) The required obstacle data is published in the AIP; or
- b) No significant obstacles exist, and this fact is published in the AIP.

h) Precision Approach Terrain Chart - ICAO

Precision Approach Terrain Charts - ICAO provide detailed terrain profile information within a defined portion of the final approach so as to enable aircraft operating agencies to assess the effect of the terrain on decision height determination by the use of radio altimeters. This chart is produced for all precision approach runways Categories II and III.

i) En-route Chart - ICAO

This chart is produced for the entire BAHRAIN FIR / BAHRAIN UIR. The aeronautical data include all aerodromes, prohibited, restricted and danger areas and the air traffic services system in detail. The chart provides flight crews with information to facilitate navigation along ATS routes in compliance with air traffic services procedures.

j) Area Chart - ICAO

The Area Chart - ICAO is produced where the air traffic services routes or position reporting requirements are complex and cannot be shown on an En-route Chart - ICAO. It contains in more detail aerodromes, which affect terminal routings, prohibited, restricted and danger areas and the air traffic services system. This chart provides the flight crew with information to facilitate the following phases of instrument flight:

- a) the transition between the en-route phase and approach to an aerodrome;
- b) the transition between take off / missed approach and en-route phase of flight; and
- c) flights through areas of complex ATS routes or airspace structure.

k) Instrument Approach Chart - ICAO

Instrument Approach Charts - ICAO are produced for all aerodromes used by civil aviation where instrument approach procedures have been established.

A separate Instrument Approach Chart - ICAO has been provided for each approach procedure.

The aeronautical data shown include information on aerodromes, prohibited restricted and danger areas, radio communication facilities and navigation aids, minimum sector altitude, procedure track portrayed in plan and profile view, aerodrome operating minima etc.

This chart provides flight crew with information which will enable them to perform an approved instrument approach procedure to the runway of intended landing including the missed approach procedure and where applicable, associated holding patterns.

I) Visual Approach Chart - ICAO

The Visual Approach Chart - ICAO is produced for aerodromes used by civil aviation where:


- 1. only limited navigation facilities are available;
- 2. radio communication facilities are not available; or
- 3. no adequate aeronautical charts of the aerodrome and its surroundings at 1:500.000 or greater scale are available; or
- 4. visual approach procedures have been established.

The aeronautical data shown, include information on aerodromes, obstacles, designated airspace, visual approach information, radio navigation aids and communication facilities as appropriate.

3.2.5 INDEX TO OPERATIONAL NAVIGATIONAL CHARTS ONC 1 : 1.000.000 and TACTICAL PILOTAGE CHARTS TPC 1 : 500.000

LIST OF CHART SERIES					
TITLE AND SCALE	SERIES CODE	CHART NUMBER			
Topographical Operational Navigation Chart - 1 : 1.000.000	ONC	H - 6			
	ONC	H - 7			
	ONC	J - 7			

LIST OF CHART SERIES					
TITLE AND SCALE	SERIES CODE	CHART NUMBER			
Topographical Tactical Pilotage Chart - 1 : 500.000	TPC	H - 6 A			
	TPC	H - 6 B			
	TPC	H-6C			
	TPC	H - 6 D			
	TPC	H - 7 D			
	TPC	J - 7 A			
	TPC	J - 7 B			
	TPC	J-7D			

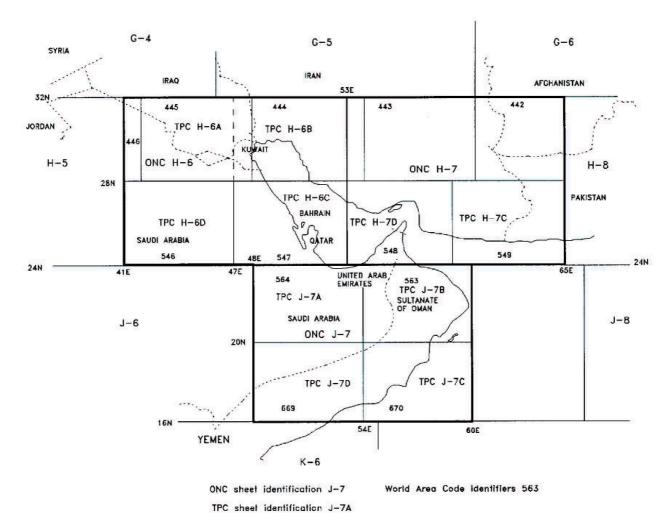

3.2.6 TOPOGRAPHICAL CHARTS

To supplement the aeronautical charts, a range of topographical charts is available from:

The Ministry of Housing Survey Directorate P.O. Box 5802 Kingdom of Bahrain TEL: +973 17533000 Telefax:+973 17533795

3.2.7 CORRECTIONS TO CHARTS NOT CONTAINED IN THE AIP

NIL

AIP BAHRAIN FIR GEN 3.3-1
2 MAR 17

GEN 3.3 AIR TRAFFIC SERVICES

3.3.1 RESPONSIBLE SERVICE

The Air Traffic Services Department of the Bahrain Civil Aviation Affairs is the responsible authority for the provision of Air Traffic Services within the area indicated under **GEN 3.3.2** below.

Undersecretary for Civil Aviation

P.O. Box 586

Kingdom of Bahrain TEL: +973 17321100 Telefax:+973 17339066 AFS: OBBBZGZX SITA: BAHAPYF

The services are provided in accordance with the provision contained in the following ICAO documents:

Annex 2 Rules of the Air

Annex 11 Air Traffic Services

Doc 4444 Air Traffic Management (PANS - ATM)

Doc 8168 Procedures for Air Navigation Services / Aircraft Operation (PANS - OPS)

Doc 7030 Regional Supplementary Procedures

Differences from these provisions are detailed in sub - section GEN 1.7.

3.3.2 AREA OF RESPONSIBILITY

Air Traffic Services are provided for the entire territories, including territorial waters, and in the airspace over the high seas encompassed by the BAHRAIN FIR / BAHRAIN UIR.

3 3 3 TYPE OF SERVICES

The following types of services are provided:

Flight Information Service (FIS) and Alerting Service (ALRS) Area Control (ACC); and Radar

With the exception of services provided at military air bases, the following types of services are provided at aerodromes:

Aerodrome Control (TWR);

Approach Radar;

Aerodrome Flight Information Service (AFIS); and

Automatic Terminal Information Service (ATIS), at certain aerodromes

For military ATS within the Kingdom of Bahrain see OBBS AD 2.17 and OBKH AD 2.17.

3.3.3.1 Air Traffic Services are provided in accordance with the standards specified in Annex 11 to the Convention on International Civil Aviation. Airspace is classified in accordance with Appendix 4 to Annex 11, and a description of the system with an indication of the utilization in the BAHRAIN FIR / BAHRAIN UIR is set out in **ENR 1.4**.

Air Traffic Control is exercised:

- a) In Class A Airspace which in the BAHRAIN UIR encompasses all Controlled Airspace at and above FL 150 and;
- b) In Class C Airspace which in the BAHRAIN FIR encompasses all Controlled Airspace below FL 150.

Note: Controlled Airspace is a generic term which covers ATS Airspace Classes A, B, C, D & E as defined in Appendix 4 to Annex 11.

3.3.3.2 Flight Information Service and Alerting Service within the Area of Responsibility outside the Control Zones, and Air Traffic Control service in airways within the Area of Responsibility are provided by one Centre (ACC Bahrain). Within Control Zones the Services are provided by the Approach Control Unit concerned.

The Taxis of each airway is constituted by a line connecting significant points identified as a rule by radio navigational facilities.

- 3.3.3.3 Air Traffic Control, Flight Information and Alerting Services are provided by:
- a) ACC Bahrain in the Bahrain CTA and along the airways, including those parts of the airways traversing Control Zones.
- b) The relevant Approach Control Unit and Aerodrome Control Unit, in co ordination with Bahrain as necessary, for arriving and departing aircraft.
- 3.3.3.4 The description of the airspace designated for Air Traffic Services purposes is contained in several tables, all forming part of

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

GEN 3.3-2 AIP BAHRAIN FIR 10 NOV 16

ENR 3.

3.3.3.5 In general, the air traffic rules and procedures in force and the organization of Air Traffic Services are in conformity with ICAO Standards, Recommended Practices and Procedures. Differences between the National and International Rules and Procedures are given in **GEN 1.7**. The Regional Supplementary Procedures are given in full with an indication where there is a difference.

3.3.3.6 Prohibited, Restricted and Danger areas are established within BAHRAIN FIR / BAHRAIN UIR. These areas are shown in **ENR**5. Activation of areas subject to Intermittent activity is notified in advance by NOTAM, given reference to the area only by its designation.

3.3.4 COORDINATION BETWEEN THE OPERATORS AND ATS

Coordination between the operator and Air Traffic Services is affected in accordance with Annex 11 and Doc 4444 (PANS - ATM).

Coordination for Special Use of Airspace

In order to ensure that activities potentially hazardous to civil aircraft are coordinated between Military users and ATC units and to:

- 1. Allow timely promulgation of information;
- 2. Minimize interference with normal civil aircraft operations;
- 3. Avoid hazards to civil aircraft;

The unit requesting special use of airspace shall submit a request to Bahrain ATC Head of ATC Operations for approval at least 10 days prior to the proposed operation. All requests shall include date and times of the request as well as the specific area requested, defined by Latitude and Longitude coordinates and altitude limits in terms of MSL.

Bahrain HATO contact details as follows:-

Head Air Traffic Operation
Air Navigation Directorate
Ministry of Transportation & Telecommunications
Kingdom of Bahrain
TEL: +973 17321158

Telefax: + 973 17329977 MOB: + 973 39522696 e-mail: a.ali@mtt.gov.bh

3.3.5 MINIMUM FLIGHT ALTITUDES

The minimum flight altitudes on the ATS routes as listed in **ENR 3** have been determined to ensure at least 300 M (1000 FT) vertical clearance above the highest obstacle within 5 NM from the edge of airways.

However, where the angular divergence of the navigational air signal in combination with the distance between the navigational aids could result in an aircraft being more than 5 NM (9 KM) on either side of the centre line, the 5 NM (9 KM) protection limit on each side of the centre line of the ATS route is increased by the extent to which the divergence is more than 5 NM (9 KM) from the centre line.

Note: The navigation performance accuracy necessary for operation on air routes within BAHRAIN UIR is expressed as RNAV type. RNAV type is containment value expressed as a distance in NM from the intended position within which flights would be for at least 95 per cent of the total flying time. For operation on the air routes in the BAHRAIN UIR, the required radio navigation specification (RNAV) is RNAV 5 represents a navigation accuracy of plus or minus 9.26 KM (5 NM) on a per cent containment basis. RNAV 5 application in BAHRAIN UIR is detailed in **ENR 1.3.4**.

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 3.3-3
2 MAR 17

3.3.6 ATS UNITS ADDRESS LIST

BAHRAIN ACC Chief ATM P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321117 / +973 17321080 / +973 17321081

Telefax:+973 17329966 / +973 17321029

AFS: OBBBZQZX e-mail: bahatc@mtt.gov.bh

BAHRAIN / ISA AIRBASE

Senior ATCO Air Operations Centre P.O. Box 245 Kingdom of Bahrain

TEL: +973 17894628 / +973 17894474

Telefax:+973 17894600 Telex: 8429BN AFS: OBBSZTZX

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17



AIP BAHRAIN FIR GEN 3.4-1
17 SEP 15

GEN 3.4 COMMUNICATION SERVICES

3.4.1 KINGDOM OF BAHRAIN

3.4.1.1 RESPONSIBLE SERVICE

3.4.1.1.1 The telecommunications services in the BAHRAIN FIR / BAHRAIN UIR are not administered by a single authority but by different administrations or operating authorities, each responsible for the telecommunications stations under their control. Arrangements concerning these services, or any enquiries, suggestions or complaints regarding telecommunications services at individual stations, should be referred to the relevant administration or operating authority for the telecommunications stations concerned.

3.4.1.1.2 The authority responsible for the administration of telecommunications services at Bahrain is Civil Aviation Affairs.

Undersecretary for Civil Aviation P.O. Box 586
Kingdom of Bahrain
TEL: +973 17321011

Telefax:+973 17339066 AFS: OBBIYAYX

The service is provided in accordance with the provisions contained in the following ICAO documents:

Annex 10 Aeronautical Telecommunications

Doc 8400 Procedures for Air Navigation Services - ICAO Abbreviations and Codes (PANS - ABC)

Doc 8585 Designator for Aircraft Operating Agencies, Aeronautical Authorities and Services

Doc 7030 Regional Supplementary Procedures

Doc 7910 Location Indicators

3.4.1.2 AREA OF RESPONSIBILITY

Communication services are provided for the entire BAHRAIN FIR / BAHRAIN UIR. Arrangements for such Services on a continuing basis should be made with the Head of Communications Civil Aviation Affairs, who is also responsible for the application of the regulations concerning the design, type and installations of aircraft radio stations. Responsibility for the day - to - day operation of these services is vested in Station Communication Officers located at each international aerodrome. Enquiries, suggestions or complaints regarding any telecommunication service should be referred to the relevant Station Communication Officer or to the Head of Communications, Civil Aviation Affairs, as appropriate.

The various authorities are in States within the BAHRAIN FIR / BAHRAIN UIR.

3.4.1.3 TYPES OF SERVICE

3.4.1.3.1 Radio Navigation Service

The following types of radio aids to navigation are available:

Instrument Landing System (ILS)
VHF Omnidirectional Radio Range (VOR)
Distance Measuring Equipment (DME)

3.4.1.3.2 Mobile Service / Fixed Service

3.4.1.3.2.1 Mobile Service

The aeronautical stations within the BAHRAIN FIR / BAHRAIN UIR maintain a continuous watch on their stated frequencies during the published hours of service unless otherwise notified.

- 3.4.1.3.2.1.1 An aircraft should normally communicate with the air ground control station which exercises control in the area in which it is flying. Aircraft should maintain continuous watch on the appropriate frequency and should not cease watch, except for reasons of safety, without the authority of the control radio station,
- 3.4.1.3.2.1.2 During flight within the BAHRAIN FIR / BAHRAIN UIR, pilots must additionally guard one or both of the emergency fequencies 121.500 MHZ and 243.000 MHZ.
- 3.4.1.3.2.1.3 At stations within the BAHRAIN FIR / BAHRAIN UIR the language used in air ground communications is English.

3.4.1.3.2.2 Fixed Service

At stations within the BAHRAIN FIR / BAHRAIN UIR messages to be transmitted over the Aeronautical Fixed Service are accepted only if:

- a) they satisfy the requirements of Annex 10, Volume 2, Chapter 3.3
- b) they are prepared in the form specified in Annex 10, and
- c) the text of an individual message does not exceed 1800 characters

GEN 3.4-2

AIP BAHRAIN FIR

17 SEP 15

General Aircraft Operating Agency messages are only accepted for transmission to countries which have agreed to accept Class "B" traffic.

3.4.1.3.2.3 Broadcast Service

Sub - Area Meteorological Broadcasts (VOLMET Radio - telephony Broadcasts) are available for the use of aircraft in flight. Full details are given in Section **GEN 3.5**.

3.4.1.3.2.3.1 Language used: English

3.4.1.3.2.3.2 Where detailed information can be obtained

Details of the various facilities available for the En - route traffic are to be found in the En - route Part. (ENR 4).

Detailes of the facilities available at the individual aerodrome are to be found in the relevant aerodrome (AD) section. In cases where a facility is serving both the En - route traffic and the Aerodromes, details are given in both the En - route Part and the Aerodrome section concerned.

The co - ordinates listed refer to the transmitting antennae.

3.4.1.4 REQUIREMENTS AND CONDITIONS

The requirements of the Directorate of Communication Services and the general conditions under which the communication services are available for international use, as well as the requirements for the carriage of radio equipment, are contained in the Air Navigation (Radio) Regulations of Bahrain. The list of the main provisions is briefly summarized below:

Article (12) Radio Equipment and its use in the Aircraft

Aircraft operating in the territory of the Kingdom of Bahrain shall not carry any radio equipment unless a license has been issued to the effect by the competent Authorities in the State of Registry. Such equipment shall be used only for air navigation purposes by the flight crew of the aircraft in accordance with the established rules.

3.4.2 Table Aeronautical Fixed Services - International Circuits

Station Name and Location Indicator	Correspondent AFTN Addressees	Type of Channel	Type of Traffic	Hours of Operation	Remarks
1	2	3	4	5	6
BAHRAIN OBBI	OBBIYFYX	Serial	AFS	H24	NIL
KUWAIT OKBK	OKBKYFYX	Serial	AFS	H24	NIL
ABU DHABI OMAE	OMAEYFYX	LAN	AMHS	H24	NIL

AIP BAHRAIN FIR GEN 3.5-1
17 SEP 15

GEN 3.5 METEOROLOGICAL SERVICES

3.5.1 KINGDOM OF BAHRAIN

3.5.1.1 Responsible Service

The Meteorological Services for civil aviation at Bahrain are provided by the Bahrain Meteorological Service.

Bahrain Meteorological Service Civil Aviation Affairs Bahrain International Airport P.O. Box 586 Kingdom of Bahrain

TEL: +973 17321178 (MET Briefing), +973 17323073 (Forecaster)

Telefax:+973 17320630 AFS: OBBIYMYX

The service is provided with the provisions contained in the following ICAO documents:

Annex 3: Meteorological Service for International Air Navigation

Annex 15: Aeronautical Information Service

Doc 8126: Aeronautical Information Services Manual Doc 7030: Regional Supplementary Procedures Doc 8700: Air Navigation Plan, MID / ASIA

Doc 9377: Co - ordination between ATS and the Meteorological Services

Differences from these provisions are detailed in Section GEN 1.7.

3.5.1.2 Area of Responsibility

Meteorological Watch Office for the BAHRAIN FIR / BAHRAIN UIR.

Air routes from Bahrain to: North America

Europe

South Africa

The Far East

3.5.1.3 Observing Systems and Operation Procedures

3.5.1.3.1 Surface wind is measured by ultrasonic wind sensor located approximately 350 M WSW of THR RWY 30L and at RWY 12R. Wind indicators are located in the meteorological units of Briefing, Observing and Operations and in the appropriate Air Traffic Services Units.

Cloud height is estimated. However Vaisala Ceilometer cloud measurements are also available near the RWY 30L.

Temperature and huminidity readings are taken from instruments located at a site some 250 M from the RWY, near to the THR RWY 30L.

Vertical / horizontal wind - shear warnings are issued.

Slant visual range observations are not made.

Visibility is estimated except for IRVR as follows.

- 3.5.1.3.2 IRVR REPORTING PROCEDURES
- 3.5.1.3.2.1 IRVR reporting is initiated when:
- a) The regular meteorological report shows visibility to be 2000 M or less;
- b) The IRVR value is observed to be 2000 M or less;
- c) Whenever shallow fog is reported, and during periods for which it is forecast.

Note: In METAR, only the touchdown and stop end values are given.

- 3.5.1.3.2.2 IRVR values will be passed to all aircraft at the beginning of each approach for landing and thereafter, any significant change to the IRVR is passed until the aircraft has landed. A significant change is defined as a change in value of one increment or more. IRVR information will also be provided to aircraft prior to take off.
- 3.5.1.3.2.3 The IRVR is measured by forward scattering visibility sensor and the system consists of three transmission meters indicating Touch down, Mid point and Stop end values for the RWY in use. Where all three readings are reported to the pilot, they are passed as three

GEN 3.5-2 AIP BAHRAIN FIR

17 SEP 15

sets of figures representing Touch - down, Mid point and Stop - end respectively. e.g.:

RVR 650 - 500 - 550

3.5.1.3.2.4 If only two values are passed they will be identified, for example, as follows:

RVR Touch - down 650 - Stop - end - 550

3.5.1.3.2.5 If only one unit is serviceable it will be identified, for example, as follows:

RVR Mid - point 650

except that if the only serviceable unit is the Stop - end, the value will not be reported and the whole system will be placed unserviceable for that RWY.

3.5.1.4 Meteorological Observations and Reports

Table GEN 3.5.1.4 Meteorological Observations and Reports

Name of Station Location Indicator	Type and frequency of observations / autom. equipment	Types of MET reports and Suppl. Information included	Observation System and sites	Hours	Climatological Information Available
BAHRAIN MET BAHRAIN INTERNATIONAL OBBI	Half hour plus special observations	METAR, SPECI, TREND & WS	SFC wind sensors RVR EQPT Ceilometer Thermometer See AD Chart	H24	Climatological tables AVBL

3.5.1.4.1 NOTIFICATION REQUIRED FROM OPERATORS

Pursuant to ICAO Annex 3, chapter 2, paragraph 2.3, notification in respect of all flight documentation and briefing is normally required. Such notification should normally be received at least six hours before expected departure time for flight of more than 1500 NM and at least 2 hours before expected departure time for flights of 1500 NM or less.

3.5.1.5 Types of Service

A 24-hour personal briefing and consultation service for flight crews is provided. Flights documentation provided comprises prognostic charts of upper air (for 250 MB) and significant weather (above FL 250) for long - haul flights. Charts for 500, 300 and 200 MB are available by prior arrangement. Rout sector winds for 700 MB and significant weather charts (above 10000 FT) are provided for regional flights.

Take-off data and climb and descent winds are also provided, together with the latest available aerodrome forecasts for designation and alternates.

Satellite imagery and local weather radar displays are available for inspection at the MWO and satellite imagery can be provided on request.

3.5.1.6 Aircraft Reports required from Pilots

In Flight

In accordance with Annex 3, chapter 5, paragraph 5.3.1, the marking and transmission of aircraft reports (AIREP) is required of the following ATS reporting points:

BAHRAIN (DAVRI, TORBO, SODAK or SOGAT)

Reports also requested at:

TOMSO, DEGSO, RESAR, ORSIS, TUMAK, ALPOB, ORMID, ULADA, RABAP

After landing

To establish a data-base for validating enhanced forecast information for take-off procedures, pilots of aircraft equipped with Flight Management Systems are requested to record winds and temperatures at and below 3000 FT at 500 FT intervals on a pro forma provided, and submit it to ground services after landing whenever operational requirements permit.

Pro forma are available from BAHRAIN AIRPORT SERVICES (BAS) and the MET / AIS Briefing Office.

AIP BAHRAIN FIR GEN 3.5-3
17 SEP 15

3.5.1.7 VOLMET Service

Name of Station	Call Sign ID (EM)	Freq.	BCST period	Hours of services	ADs included	Continents & Format of REP and FCST & Remarks
BAHRAIN	BAHRAIN VOLMET (A3E)	128.800 MHZ	H24	CNS	OBBI, OEDF, OEJN, OERK, OKBK, OMAA, OMDB, OMRK, OMSJ, OMMS, and OTBD	METAR, TREND, QNH

3.5.1.8 SIGMET Service / Validity

Name of MWO / Location Indicator	Hours	FIR Served	Type of SIGMET / Validity	Specific Procedures	ATS Unit served	Additional Information
BAHRAIN	H24	BAHRAIN FIR / BAHRAIN UIR	SIGMET / 4 HR SIGMET SST / 4 HR	NIL	BAHRAIN ACC SHAIKH ISA APC DOHA APC	NIL

3.5.1.8.1 **General**

For safety of air traffic the Bahrain Meteorological Service maintains an area meteorological watch and warning service. This service consists partly in a continuous weather watch within the FIR / UIR and the issuance of appropriate information (SIGMET) by the Meteorological Watch Office, partly in the issue of warnings for BAHRAIN INTERNATIONAL airport and, subject to agreement, for other aerodromes by all aeronautical MET office.

3.5.1.8.2 Area Meteorological Watch Service

The area meteorological watch service is performed by the Bahrain Meteorological Watch Office. The MWO issues information in the form of SIGMET messages about occurrence or expected occurrence of one of several of the following significant meteorological phenomena.

Thunderstorms* (Obscured, Embedded, Frequent, Obscured with Hail, Embedded with Hail, Frequent with Hail). Severe turbulence
Severe icing
Severe mountain waves
Heavy sands / dust - storm

Volcanic ash cloud Tropical cyclone

* Area of widespread Cumulonimbus clouds or Cumulonimbus along a line (squall line) with little or no space between individual clouds, or Cumulonimbus embedded in cloud layers or obscured by haze.

SIGMET SST messages are issued as required and relate to the following phenomena:

Cumulonimbus Turbulence (mod / severe/) Hail Volcanic ash cloud

The SIGMETS are issued in abbreviated plain language using ICAO abbreviations and are numbered consecutively for each day commencing at 0001. Their period of validity is generally limited to 4 hours or less from the time of transmission. The MWO transmits SIGMETS issued by itself as well as SIGMETS of adjacent. MWOs. SIGMET Information is disseminated.

- a) by the Area Control Centre Bahrain for the BAHRAIN FIR / BAHRAIN UIR;
- b) by ATS units for their own area of responsibility.

The information is broadcast from Aeronautical Communication Centre and repeated every half and full hour during the period of validity of the SIGMET Information.

3.5.1.8.3 Warning Service

Warnings are issued for the safety of aircraft taking off and landing for the protection of parked and moored aircraft or equipment at the airport. Warnings are issued in plain language.

GEN 3.5-4 AIP BAHRAIN FIR 17 SEP 15

Aerodrome Warnings are issued when one or more of the following phenomena are expected to affect the airport:

Thunderstorm
Squall 1
Sandstorm / dust storm
Rising sand / dust
Strong surface wind 2
Temperature inversion 3
Hail
Low level turbulence

Note 1: squall relates to a sudden increase of wind speed of at least 16 KT, the speed being 22 KT or more.

Note 2: strong wind refers to mean wind speed of 22 KT or more and / or gusts of 28 KT or more.

Note 3: Temperature inversion warnings are issued for a lapse of 07° C or more, at or below 1500 FT.

Wind Shear Warnings are issued within a radius of 8 KM from the airport and up to 1600 FT. For vertical Shear the following criteria are used:

Mod 5 - 8 KT / 100 FT Str 9 - 12 KT / 100 FT Svr 12 or more KT / 100 FT

Horizontal shear refers to a vector change of more than 20 KT. All warnings are valid for 1 to 4 hours unless cancelled. Each type of warnings is numbered consecutively on a monthly basis.

The warnings are issued in English and are distributed in accordance with a distribution list which has been agreed upon locally. In order to guarantee a rapid dissemination of the warnings, the distribution list used contains only one recipient for an interested group; this recipient will be responsible for the further dissemination for the warnings within the group.

3.5.1.9 Other Automated Meteorological Services

NIL

3.5.1.10 Meteorological Briefing at Aerodromes

Details of meteorological briefing at aerodromes are given in the individual aerodrome subsections i.e. AD 2.

AIP BAHRAIN FIR GEN 3.6-1
17 SEP 15

GEN 3.6 SEARCH AND RESCUE

3.6.1 Responsible Service

The Search and Rescue Services in the BAHRAIN FIR / BAHRAIN UIR are organized in accordance with the International Standards and Recommended Practices of ICAO, and overall responsibility for coordinating the necessary facilities rests with the Undersecretary for Civil Aviation, Bahrain Civil Aviation Affairs, Kingdom of Bahrain:

Bahrain Rescue Coordination Center (RCC) P.O. Box 586 Kingdom of Bahrain

TEL: +973 17329969 / +973 17329959

Telefax:+973 17329949 AFS: OBBISARX

Note 1: New AFTN address OBBINEMX is established for the purpose of Nuclear Emergency Message (NEM).

Note 2: There is a direct speech circuits between the RCC and all related ATC Units.

Note 3: Out of the normal working hours from 0400 to 1100 to call +973 17321081 and FAX +973 17321029

Applicable ICAO Documents:

Annex 12 Search and Rescue Annex 13 Aircraft Accident Investigation Doc 7030 Regional Supplementary Procedures

Differences:

NIL

3.6.2 Area of Responsibility

The Search and Rescue Region encompasses the BAHRAIN FIR / BAHRAIN UIR, excluding the Qatar land and territorial waters.

3.6.3 Types of Service

3.6.3.1 Coastguard Search and Rescue Unit

Facilities Available: Marine Craft

Ministry of Interior CGD P.O. Box 13 Kingdom of Bahrain TEL: +973 17700000 Telefax:+973 17700728 Telex: 7707 CGD BN

Craft Available	Activation Time	Availability
2 RB (20 M)	Immediate	H 24
4 RB (20 M)	Immediate	H 24

H 24

Immediate

3.6.3.2 Police Flying Wing

Facilities Available: Light Helicopters

Ministry of Interior Police Flying Wing P.O. Box 13 Kingdom of Bahrain

4 Open oat (31 FT)

TEL: +973 17240000 / +973 17254736 Telefax:+973 17253439 BDF Helicopter Wing

GEN 3.6-2 17 SEP 15

Aircraft Available	Activation Time	Availability
2 HEL - L	30 Mins. BTN 0500 & 1215	SR - SS
	1 HR BTN 1215 & 0500	
	1 HR during weekend and public holidays	

3.6.3.3 BDF Helicopter Wing

Facilities Available: Light Helicopter

BDF Helicopter Wing P.O. Box 245 Kingdom of Bahrain TEL: +973 17894474 Telefax:+973 17620926

Aircraft Available	Activation Time	Availability
2 SAR HEL - L	30 MIN BTN 0400 and 1100	SR - SS
1 Rescue (EMPRA)	1 HR 30 MIN after 1100 and during weekend and public holidays.	

3.6.3.4 COSPAS / SARSAT

Area Control Centre ACC is located at the Civil Aviation Affairs / Air Navigation Directorate to detect and locate the position of distress signals pemitted on 121.500 MHZ and 406.000 MHZ and received by the COSPAS / SARSAT satellite system. Distress signals received at the ACC will be notified to the appropriate Rescue Coordination Centre (RCC) in order to initiate immediate search and rescue coordination.

3.6.4 SAR agreements

To be developed

3.6.5 Conditions of availability

Assistance will be provided to aircraft in distress and to survivors of aircraft accidents. In addition to the facilities outlined in **GEN 3.6.3** various elements of Police organizations, the Merchant Marine and the Armed Forces are available to the Search and Rescue Organization.

Requests for entry of aircraft, equipment and personnel from other States to engage in the search for aircraft in distress or to rescue survivors of aircraft accidents should be transmitted to:

Undersecretary for Civil Aviation P.O. Box 586
Kingdom of Bahrain

TEL: +973 17321081 / +973 17320487

Telefax:+973 17329949 AFS: OBBISARX

Unwarrant Operations

Civil Aviation Affairs, as the authority responsible for the coordination of rescue services for the Bahrain SRR, reserves the right to take steps to recover expenditure, incurrent either by aerodrome services or other participants involved in search and rescue operations, whenever circumstances show that the operation was unwarranted.

3.6.6 Procedures and signals used

Owing to the nature terrain, aircraft are advised to maintain a good look - out at all times whilst operating within the BAHRAIN FIR / BAHRAIN UIR and are requested to inform the Bahrain FIC immediately they see anything which might be relate to an aircraft in distress.

Procedures for pilots - in - command observing an accident or intercepting a distress call are in accordance with Annex 12.

Communications

Transmission and reception of distress messages within the Bahrain Search and Rescue Region are handled in accordance with ICAO Annex 10, Volume II, Chapter 5, paragraph 5.3.

AIP BAHRAIN FIR GEN 3.6-3
17 SEP 15

For communications during search and rescue operations, the codes and abbreviations published in ICAO Abbreviations and Codes (Doc 8400) are used.

The frequency 121.500 MHZ is guarded continuously during the hours of service at an area control centers and flight information centers. It is also monitored at BAHRAIN INTERNATIONAL Approach Control Office.

Search and rescue signals

The search and rescue signals to be used are those prescribed in Annex 12, Chapter 5, paragraph 5.10.

Ground / air visual signal codes for use by survivors

NO.	Message	Code symbol
1	Require assistance	V
2	Require medical assistance	Х
3	No or negative	N
4	Yes or affirmative	Y
5	Proceeding in this direction	->

Instructions for use:

- 1. Make signals not less than 8 FT (2.5 M).
- 2. Take care to lay out signals exactly as shown.
- 3. Provide as much color contrast as possible between signals and background.
- 4. Make every effort to attract attention by other means such as radio, flares, smoke, reflected light.



AIP BAHRAIN FIR GEN 4.1-1
3 MAR 16

GFN 4

CHARGES FOR AERODROMES / HELIPORTS AND AIR NAVIGATION SERVICES

GEN 4.1 AERODROME / HELIPORT CHARGES

KINGDOM OF BAHRAIN

4.1.1 GENERAL

4.1.1.1 Unless an alternative arrangement has been made, all charges for the use of BAHRAIN INTERNATIONAL airport are payable by the pilot of the aircraft on demand, or before the aircraft departs from the aerodrome.

4.1.1.2 NON - SCHEDULED OVER FLIGHT

Operators of non - scheduled flights within the BAHRAIN FIR / BAHRAIN UIR which do not land at BAHRAIN INTERNATIONAL airport must ensure that the full name and address of the Aircraft Operator, or of the Agent authorized to pay charges on behalf of the Aircraft Operator, is include in Field 18 of the Flight Plan. In addition to the following:

- 1- Operator name.
- 2- Operator postal address.
- 3- Postal address of the company for collecting our bills and settling our payments.
- 4- Call sign and registration separately if they were different.
- 5- Aircraft type and the maximum takeoff weight.
- 6- The postal address of the agent and its client if any.
- 7- Telephone and fax numbers.
- 8- E-mail address.

4.1.1.3 LANDING CHARGES

4.1.1.3.1 **BASIS**

The maximum take - off mass of the aircraft, authorized by the State of Registration in its certificate of airworthiness.

ICAO VORTEX CLASSIFICATION	мтом	CHARGE
Light	Up to 7000 KG	BD 7.000 flat rate
Medium	7001 up to 136000 KG	BD 1.400 per 1000 KG or part of thereof
Heavy	Over 136000 KG	BD 1.500 per 1000 KG or part thereof

4.1.1.3.2 **RULES**

- 4.1.1.3.2.1 The payment of the Landing Charge shall entitle the aircraft to:
- a) The use of the aerodrome for alighting and departure.
- b) The use of the radio and night lighting installations at the aerodrome.
- c) The supply of all available information as to routes, and weather information.
- d) The services of the aerodrome personnel, if available, for manual assistance in guiding, housing, or parking the aircraft.
- 4.1.1.3.2.2 The landing charge, the payment of which entitles the aircraft to the use of the radio, does not include operational charges or charges for radio services in connection with movement, which may be levied by an approved agency of the Government.

4.1.1.3.3 PAYMENT OF CHARGES

- 4.1.1.3.3.1 Charges must be paid to the Duty Aerodrome Reporting Office Official prior to the departure of the aircraft, unless previous arrangements have been made for credit facilities.
- 4.1.1.3.3.2 A money changing facility exists in the passenger concourse of the Terminal Building.

4.1.1.3.3.3 BAHRAIN AIPORT CHARGES

In response to the privatization plan which the kingdom of Bahrain is adopting nowadays to some governmental agencies, Bahrain International Airport is considered to be one of those agencies who must go with the privatization plan.

In this context, Bahrain Airport Company has contracted the Bahrain International Airport and the associated facilities. The following elements shall be considered applicable immediately:

1. **LANDING & PARKING CHARGES:** Invoices raised for such matters are solely and accordingly devolved to Bahrain Airport Company since July 2010. Therefore, correspondence serving similar nature shall be made to the following contact details:

e-mail: Fatima.Ajawi@bac.bh TEL: (+973) 17 353381 Telefax: (+973) 17 920441

- 2. CHARGES OTHER THAN THE ABOVE: In response to the development and improvement in Civil Aviation Affairs payment process, all payments due to be made other than landing and parking fees must be sent to Civil Aviation Affairs containing the following:
 - 1- Operator name.
 - 2- Include all invoices numbers for the payment.
 - 3- Operator code.
 - 4- Any contact details.

While it is not our intention to disrupt your services, please be advised that if payment didn't contain any of the above listed information, we will be left with no option but to give priority to the old outstanding invoices, where all the correspondence shall be made to the following contact details:

e-mail: debt.collection@mtt.gov.bh

TEL: (+973) 17 337724 / 17 327739 / 17 327707

Telefax: (+973) 17 534722

4.1.1.3.4 **REDUCTIONS**

4.1.1.3.4.1 General

Reductions in the standard charges may be granted by Civil Aviation Affairs by the issuance of specific directives. Details upon application.

4.1.1.3.4.2 The following reductions in landing fees may be granted, by prior arrangement with the airport authority, in respect of flights undertaken soley for the purpose of the training or testing of flying personnel, or in respect of flights performed by an aircraft constructor and undertaken soley for the purpose of experimenting with or testing the constructor's aircraft.

4.1.1.3.4.3 AIRCRAFT WEIGHING / RATES PER LANDING

AIRCRAFT WEIGHING	RATES PER LANDING	
Up to 45000 KG	50 % of the standard charge	
Exceeding 45000 KG, but not exceeding 90000 KG	BD 30	
Exceeding 90000 KG	25 % of the standard charge up to a maximum of BD 100	

4.1.1.3.4.4 A reduction in the standard fee may be granted, by prior arrangement with Civil Aviation Affairs, in respect of a series of flights through Bahrain, when landing are made for non - traffic purposes, e.g. fuelling, crew - rest, change of crew.

4.1.1.3.5 **EXEMPTIONS**

4.1.1.3.5.1 GENERAL

Exemptions from payment of landing charges for aircraft other than those listed below may be granted by Civil Aviation Affairs by the issuance of special directives. Details upon application.

- 4.1.1.3.5.2 The following aircrafts shall be exempted by law from landing and parking fees:
- a) State aircraft and aircraft of Kings. Heads of State and Emirs and persons of similar status:.
- b) Aircraft of the United Nations and its specialised agencies;
- c) Aircraft of the League of Arab States and its specialised agencies, and aircraft of regional organisations of which the Sate is a member...
- d) Aircraft used free of charge in ambulance operations, search and rescue operations, as well as aircraft of the Red Crescent and Red Cross; and
- e) Any other aircraft or any government or diplomatic agency that the Minister may exempt from fees either totally or partially, if this is in the public interest, following consultation with the Minster of Finance and approval of the Prime Minster.

4.1.1.4 PASSENGER SERVICE CHARGES

4.1.1.4.1 Unless specifically exempted by the appropriate Authority, the following Passenger service charges are levied on all

AIRAC AMDT 06/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR GEN 4.1-3
25 MAY 17

Passengers as follows:-

- 4.1.1.4.1.1 An Airport charge of BD 7,000 (SEVEN) is levied on all Passengers leaving the Kingdom of Bahrain by Air.
- 4.1.1.4.1.2 An Airport charge of BD 1,000 (ONE) is levied on all transfer Passengers through the Kingdom of Bahrain.
- 4.1.1.4.1.3 Common user Platform service of (30 CENT) of a (USD) per Passengers check-in shall be so charged.
- 4.1.1.4.1.4 All the above charges are Incorporated in the Passengers ticket upon issuance.

4.1.1.4.2 Exemptions

4.1.1.4.2.1 General

Exemptions from payment of landing charges for aircraft other than those listed below may be granted by Civil Aviation Affairs by the issuance of special deirecves. Detail upon application.

The following aircrafts should be exempted by law from landing and parking fees:

- 4.1.1.4.2.2 The following categories shall be exempt from departure service charge:
- a) Bahraini and foreign official and deplomatic delegations.
- b) Chiefs and members of the diplomatic missions approved by the State.
- c) Members of the aircraft crew, provided they are dressed formally;
- d) Transit passengers.
- e) Children who are less than two years of age.
- 4.1.1.4.2.3 The Minster may exempt any other categories, after obtaining the opinon of the Minster of Finance and approval of the Prime Minster.

4.1.1.5 **PARKING**

4.1.1.5.1 Maximum take - off weight of the aircraft authorized by the State of Registration in its certificate of airworthiness.

4.1.1.5.2 PARKING RATES

Aircraft up to 25000 KG MTOW	Flat rate BD 5.000
Aircraft of 25001 KG MTOW & over	BD 0.200 per 1000 KG or part thereof

See GEN 4.1.1.5.3.1 for applicability

4.1.1.5.3 **RULES**

- 4.1.1.5.3.1 No parking fee will be charged for the first two hours after landing. After the first two hours and for each period of 24 hours or part thereof the above parking rates will be charged.
- 4.1.1.5.3.2 An authorized official from Civil Aviation Affairs may at any time order an aircraft operator either to move a parked aircraft to another position, or to remove it from the airport. Failure to comply with the order within the period specified in it will render the operator liable to a special charge, equivalent to five times the standard parking charge set out above, for every day or part of a day during which the aircraft remains in position after the expiry of the period specified in the order.

4.1.1.5.4 PAYMENT OF CHARGES

See payment of landing charges.

4.1.1.5.5 **REDUCTIONS**

- 4.1.1.5.5.1 Monthly rates, payable in advance, are 22 times the daily rates.
- 4.1.1.5.5.2 Reductions in the standard charges may be granted by Civil Aviation Affairs by the issuance of special directives. Details upon application.

4.1.1.5.6 **EXEMPTIONS**

The same as for exemption for landing charges.

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17



AIP BAHRAIN FIR GEN 4.2-1
17 SEP 15

GEN 4.2 AIR NAVIGATION SERVICES CHARGES

4.2.1 EN - ROUTE CHARGES

4.2.1.1 **GENERAL**

4.2.1.1.1 An en - route charge will be payable by the owner or operator of the aircraft concerned in respect of each flight carried out, whether in whole or in part within the BAHRAIN FIR / BAHRAIN UIR, which entails the use of facilities provided by the Bahrain Air Traffic Control Centre in accordance with authorised procedures.

- 4.2.1.1.2 A flight is defined as the complete process of take off, journey en route and subsequent landing.
- 4.2.1.1.3 The assessment for the en route charge is based on a sliding scale relating to the maximum permitted take off weight of the aircraft.

4.2.1.2 SCALE OF CHARGES

4.2.1.2.1 STANDARD CHARGES

The standard charge will be assessed in accordance with the following schedule:

Charges impose on each landing and take-off to / from Bahrain International Airport		
Weight Charges		
Up to 40,000 Kg	BD 12.600	
40,001 Kg - 80,000 Kg	BD 18.900	
80,001 Kg - 120,000 Kg	BD 25.200	
120,001 Kg - 200,000 Kg	BD 31.500	
200,001 Kg - 300,000 Kg	BD 37.800	
300,001 Kg or more	BD 42.000	

4.2.1.3 EN-ROUTE CHARGES

Air Navigation charges for aircraft that does not landing in Bahrain International Airport		
Weight	Charges	
Up to 40,000 Kg	BD 24.000	
40,001 Kg - 80,000 Kg	BD 35.000	
80,001 Kg - 120,000 Kg	BD 47.000	
120,001 Kg - 200,000 Kg	BD 59.000	
200,001 Kg - 300,000 Kg	BD 71.000	
300,001 Kg or more	BD 79.000	

4.2.1.4 REBATES

Rebates in the standard charges may be granted by Civil Aviation Affairs upon issuance of specific directives. Details upon application.

A special rate of 50% of the standard en - route charge may be applied in the case of a flight carried out for the sole purpose of the training ot testing of fliying personnel that entails the aircraft being flown outside the aerodrome Control Zone. Prior written application for the grant of such special rates should be made to the Under Secrectary of Civil Aviation, Bahrain.

4.2.1.5 EXEMPTIONS

4.2.1.5.1 GENERAL

Exemptions from the payment of en - route charges other than those listed below may be granted by Civil Aviation Affairs by the issuance of special directives. Details upon application.

17 SEP 15

- 4.2.1.5.2 The following classes of aircraft are exempt by law from Air Navigation Services charges:
- a) State aircraft and aircraft of Kings, Heads of State and Emirs and persons of similar status;
- b) Aircraft of the United Nations and its specialised agencies;
- c) Aircraft of the Leauge of Arab States and its specialised agencies, and aircraft of regionl organisations of which the State is a member;
- d) Aircraft used free of charge in ambulance operations, search and rescue operations, as well as aircraft of the Red Crescent and Red Cross;
- Any other aircraft or any government of diplomatic agency that the Minister may exempt from fees either totally or partially, if this is in the public interest, following consultation with the Minster of Finance and approval of the Prime Minister.

AIP BAHRAIN FIR ENR 0.6-1 17 SEP 15

PART 2 - EN-ROUTE (ENR)

ENR 0.

ENR 0.1 PREFACE

Not applicable.

ENR 0.2 RECORD OF AIP AMENDMENTS

Not applicable.

ENR 0.3 RECORD OF AIP SUPPLEMENTS

Not applicable.

ENR 0.4 CHECKLIST OF AIP PAGES

Not applicable.

ENR 0.5 LIST OF HAND AMENDMENTS TO THE AIP

Not applicable.

	ENR 0.6 TABLE OF CONTENTS	
		Page
ENR 0.		
ENR 0.1 ENR 0.2 ENR 0.3 ENR 0.4 ENR 0.5 ENR 0.6	PREFACE RECORD OF AIP AMENDMENTS RECORD OF AIP SUPPLEMENTS CHECKLIST OF AIP PAGES LIST OF HAND AMENDMENTS TO THE AIP TABLE OF CONTENTS	ENR 0.6-1 ENR 0.6-1 ENR 0.6-1 ENR 0.6-1 ENR 0.6-1
ENR 1.	GENERAL RULES AND PROCEDURES	
ENR 1.10 ENR 1.11 ENR 1.12 ENR 1.13	GENERAL RULES VISUAL FLIGHT RULES INSTRUMENT FLIGHT RULES ATS AIRSPACE CLASSIFICATION AND DESCRIPTION HOLDING, APPROACH AND DEPARTURE PROCEDURES RADAR SERVICES AND PROCEDURES ALTIMETER SETTING PROCEDURES REGIONAL SUPPLEMENTARY PROCEDURES (DOC 7030 / 5) AIR TRAFFIC FLOW MANAGEMENT (ATFM) AND AIRSPACE MANAGEMENT FLIGHT PLANNING ADDRESSING OF FLIGHT PLAN MESSAGES INTERCEPTION OF CIVIL AIRCRAFT UNLAWFUL INTERFERENCE AIR TRAFFIC INCIDENTS	ENR 1.1-1 ENR 1.2-1 ENR 1.3-1 ENR 1.4-1 ENR 1.5-1 ENR 1.6-1 ENR 1.7-1 ENR 1.9-1 ENR 1.10-1 ENR 1.11-1 ENR 1.12-1 ENR 1.13-1
ENR 2.	AIR TRAFFIC SERVICES AIRSPACE	
ENR 2.1 ENR 2.2	FIR, UIR, TMA AND CTA OTHER REGULATED AIRSPACE	ENR 2.1-1 ENR 2.2-1
ENR 3.	ATS ROUTES	
ENR 3.1 ENR 3.2 ENR 3.3 ENR 3.4 ENR 3.5 ENR 3.6	LOWER ATS ROUTES UPPER ATS ROUTES AREA NAVIGATION (RNAV) ROUTES HELICOPTER ROUTES OTHER ROUTES EN-ROUTE HOLDING	ENR 3.1-1 ENR 3.2-1 ENR 3.3-1 ENR 3.4-1 ENR 3.5-1 ENR 3.6-1
ENR 4.	RADIO NAVIGATION AIDS/SYSTEMS	
ENR 4.1 ENR 4.2	RADIO NAVIGATION AIDS - EN-ROUTE SPECIAL NAVIGATION SYSTEMS	ENR 4.1-1 ENR 4.2-1

17 AUG 17	ENK 0.0-2
	17 AUG 17

I

ENR 4.3 ENR 4.4 ENR 4.5	GLOBAL NAVIGATION SATELLITE SYSTEM (GNSS) NAME-CODE DESIGNATORS FOR SIGNIFICANT POINTS AERONAUTICAL GROUND LIGHTS - EN-ROUTE	Page ENR 4.3-1 ENR 4.4-1 ENR 4.5-1
ENR 5.	NAVIGATION WARNINGS	
ENR 5.1	PROHIBITED, RESTRICTED AND DANGER AREAS	ENR 5.1-1
ENR 5.2	MILITARY EXERCISE AND TRAINING AREAS AND AIR DEFENCE IDENTIFICATION ZONE (ADIZ)	ENR 5.2-1
ENR 5.3	OTHER ACTIVITIES OF A DANGEROUS NATURE AND OTHER POTENTIAL HAZARDS	ENR 5.3-1
ENR 5.4	AIR NAVIGATION OBSTACLES - EN-ROUTE	ENR 5.4-1
ENR 5.5	AERIAL SPORTING AND RECREATIONAL ACTIVITIES	ENR 5.5-1
ENR 5.6	WILDLIFE MANAGMENT	ENR 5.6-1
ENR 6.	EN-ROUTE CHARTS	
	BAHRAIN FIR ENR 6-2.3 ENROUTE CHART LOWER GND-BELOW FL150	ENR 6-5
	BAHRAIN FIR FNR 6-2 1 FNROUTE CHART UPPER FI 150 - FI 460	FNR 6-7

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS AIP BAHRAIN FIR ENR 1.1-1 17 SEP 15

ENR 1. GENERAL RULES AND PROCEDURES

ENR 1.1 GENERAL RULES

The air traffic rules and procedures applicable to air traffic in the BAHRAIN FIR / BAHRAIN UIR conform with Annexes 2 and 11 to the Convention on International Civil Aviation and to those portions, applicable to aircraft, for the Procedures for Air Navigation Services - Rules of the Air and Air Traffic Services, and the Regional Supplementary Procedures applicable to the MID / ASIA Region, except for the differences listed in **GEN 1.7**.



AIP BAHRAIN FIR ENR 1.2-1
17 SEP 15

ENR 1.2 VISUAL FLIGHT RULES

- 1.2.1. Except when operating as a special VFR flight, VFR flights shall be conducted so that the aircraft is flown in conditions of visibility and distance from clouds equal to or greater than those specified in Table 1.
- 1.2.2. Except when a clearance is obtained from an air traffic control unit, VFR flights shall not take off or land at an aerodrome within a control zone, or enter the aerodrome traffic zone or traffic pattern:
- a) When the ceiling is less than 1500 FT (450 M); or
- b) When the ground visibility is less than 5 KM.
- 1.2.3. VFR flights between sunset and sunrise, or such other period between sunset and sunrise as may be prescribed by the appropriate ATS authority, shall operated in accordance with the conditions prescribed by such authority.
- 1.2.4. Unless authorized by the appropriate ATS authority, VFR flights shall not be operated:
- a) at or above FL 150,
- b) at transonic and supersonic speeds.

Airspace class	A *** BCD E	F	G
		ABOVE 3000 FT (900 M) AMSL or above 1000 FT (300 M) above terrain, whichever is the higher	At and below 3000 FT (900 M) AMSL or 1000 FT (300 M) above terrain, whichever is the higher
Distance from cloud	1500 M horizontally 1000 FT (300 M) vertically	,	
Flight visibility	,	8 KM at and above 10000 FT (3050 M) AMSL 5 KM below 10000FT (3050 M) AMSL	

Table *

- a) lower flight visibilities to 1500 M may be permitted for flights operating:
 - 1. at speeds that, in the prevailing visibility, will give adequate opportunity to observe other traffic or any obstacles in the time to avoid collision: or
 - 2. in circumstances in which the probability of encounters with other traffic would normally be low, e.g. in areas of low volume traffic and for aerial work at low levels.
- b) HELICOPTERS may be permitted to operate in less that 1500 M flight visibility, if maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstacles in time to avoid collision.
- *** The VMC minima in Class A airspace are included for guidance to pilots and do not imply acceptance of VFR flights Class A airspace.
- 1.2.5. Except when necessary for take off or landing, or except by permission from the appropriate authority, a VFR flight shall not be flown:
- a) over the congested area of cities, towns or settlements or over an open air assembly of persons at a height less than 1000 FT (300 M) above the highest obstacle within a radius of 600 M from the aircraft;
- b) elsewhere than as specified in 5 (a), at a height less than 500 FT (150 M) above the ground or water.
- 1.2.6. Except where otherwise indicated in air traffic control clearances or specified by the appropriate ATS authority, VFR flights in level cruising flight when operated above 3000 FT (900 M) from the ground or water, or a higher datum as specified by the appropriate ATS authority, shall be conducted at a flight level appropriates to the track as specified in the table of cruising levels.
- 1.2.7. VFR flights shall comply with the provisions of Chapter 3 para 3.6 of Annex 2:
- a) when operated within Class B, C and D airspace;
- b) when forming part of aerodrome traffic at controlled aerodromes; or
- c) when operated as special VFR flights.
- 1.2.8. An aircraft operated in accordance with the visual flight rules which wishes to change to Compliance with the instrument flight rules shall:
- a) If a flight plan was submitted, communicate the necessary changes to be effected to its current flight plan, or

^{*} When the height of the transition altitude is lower than 10000 FT (3050 M) AMSL, FL 100 should be used in lieu of 10000 FT.

^{**} When so prescribed by the appropriate ATS authority:

b) When so required by Chapter 3 para 3.3 of Annex 2, submit a flight plan to the appropriate air traffic services unit and obtain a clearance prior to proceeding IFR when in controlled airspace.

AIP BAHRAIN FIR ENR 1.3-1
17 SEP 15

ENR 1.3 INSTRUMENT FLIGHT RULES

1.3.1 RULES APPLICABLE TO ALL IFR FLIGHTS

1.3.1.1 Aircraft equipment

Aircraft shall be equipped with suitable instruments and with navigation equipment appropriate to the route to be flown.

1.3.1.2 Minimum levels

Except when necessary for take - off or landing except when specifically authorized by the appropriate authority, an IFR flight shall be flown at a level which is not below the minimum flight altitude established by the State whose territory is overflown or, where no such minimum flight altitude has been established:

- a) over high terrain or in mountainous areas, at a level which is at least 2000 FT (600 M) above the highest obstacle located within 8 KM of the estimated position of the aircraft;
- b) elsewhere than as specified in a), at a level which is at least 1000 FT (300 M) above the highest obstacles located within 8 KM of the estimated position of the aircraft.

Note: The estimated position of the aircraft will take account of the navigational accuracy which can be achieved on the relevant route segment, having regard to the navigational facilities available on the ground and in the aircraft.

1.3.1.3 Change from IFR flight to VFR flight

- 1.3.1.3.1 An aircraft electing to change the conduct of its flight from compliance with the instrument flight rules to compliance with the visual flight rules shall, if a flight plan was submitted, notify the appropriate air traffic services unit specifically that the IFR flight is cancelled and communicate thereto the changes to be made to its current flight plan.
- 1.3.1.3.2 When an aircraft operating under the instrument flight rules is flown in or encounters visual meteorological conditions it shall not cancel its IFR flight unless it is anticipated, and intended, that the flight will be continued for a reasonable period of time in uninterrupted visual meteorological conditions.

1.3.2 RULES APPLICABLE TO IFR FLIGHTS WITHIN CONTROLLED AIRSPACE

- 1.3.2.1 IFR flights shall comply with the provisions of 3.6 of Annex 2 to the Convention on International Civil Aviation when operated in controlled airspace.
- 1.3.2.2 An IFR flight operating in cruising flight in controlled airspace shall be flown at a cruising level or, if authorized to employ cruise climb techniques, between two levels or above a level, selected from:
- a) the tables of cruising levels in Appendix 3 of Annex 2 or,
- b) a modified table of cruising levels, when so prescribed in accordance with Appendix 3 of Annex 2 for flights above FL 410.

Except that the correlation of levels to track prescribed therein shall not apply whenever otherwise indicated in air traffic control clearance or specified by the appropriate ATS authority in the Aeronautical Information Publication.

For cruising levels within the BAHRAIN FIR / BAHRAIN UIR see ENR 1.3.3.1.

1.3.2.3 Five minutes longitudinal separation

In accordance with ICAO DOC 4444 PARA 5.4.2.2.1.1 C. Within the AMMAN FIR, BAHRAIN FIR / BAHRAIN UIR, DAMASCUS FIR, JEDDAH FIR and NICOSIA FIR / NICOSIA UIR, a minimum of five minutes longitudinal separation will be applied when the leading aircraft is maintaining a TAS of 20 KTs or more faster than the following aircraft.

The application of this separation minimum may require ATC to impose speed restrictions on aircraft. When subject to speed restrictions, pilots must notify ATC immediately if at any time they are unable to comply with the restrictions.

Pilots should note that speed restrictions applied in one FIR will continue to apply in succeeding FIRs unless specifically cancelled by ATC.

1.3.3 RULES APPLICABLE TO IFR FLIGHTS OUTSIDE CONTROLLED AIRSPACE

1.3.3.1 Cruising levels

An IFR flight operating in level cruising flight outside if controlled airspace shall be flown at a cruising level appropriate to its track as specified in:

- a) the tables of cruising levels in Appendix 3 of Annex 2, except when otherwise specified by the appropriate ATS authority for flight at or below 3000 FT (900 M) above mean sea level: or
- b) a modified table of cruising levels, when so prescribed in accordance with Appendix 3 of Annex 2 for flight above FL 410. (Not used at the present in the BAHRAIN UIR)

Note: This provision does not preclude the use of cruise climb techniques by aircraft in supersonic flight.

1.3.3.2 Communications

An IFR flight operating outside controlled airspace but within or into areas, or along routes, designated by the appropriate ATS authority in accordance with 3.3.1.2 c) or d) of Annex 2 shall maintain a listening watch on the appropriate radio frequency and established two - way communication, as necessary, with the air traffic services unit providing flight information services.

1.3.3.3 Position reports

An IFR flight operating outside controlled airspace and required by the appropriate ATS authority to:

- · submit a flight plan,
- maintain a listening watch on the appropriate radio frequency and establish two way communication, as necessary, with the air traffic services unit providing flight information service, shall report position as specified in 3.6.3 of Annex 2 for controlled flights.

Note: Aircraft electing to use the air traffic advisory service whilst operating IFR within specified advisory airspace are expected to comply with the provisions of 3.6 of Annex 2, except that the flight plan and changes thereto are not subjected to clearance and that two - way communication will be maintained with the unit providing the air traffic advisory service. There is no Advisory Airspace currently designated within the BAHRAIN FIR / BAHRAIN UIR.

1.3.4 OPERATIONS ON ATS ROUTES IN THE BAHRAIN FIR / BAHRAIN UIR WHERE AN RNAV TYPE IS SPECIFIED

1.3.4.1 APPLICATION OF RNAV 1 AND RNAV 5 TO ATS ROUTES IN THE BAHRAIN UIR

- 1.3.4.1.1 Requirements for RNAV capability and aircraft navigation accuracy meeting RNAV 1 and RNAV 5 will be progressively introduced in BAHRAIN UIR.
- 1.3.4.1.2 RNAV 1 and RNAV 5 requirements may be specified on a route by route basis or by designation of airspace..
- 1.3.4.1.3 Within BAHRAIN UIR only RNAV equipped aircraft having a navigation accuracy meeting RNAV 1 and RNAV 5 may plan for operations under IFR on those ATS routes, and within those levels bands, which have been specified as requiring RNAV 1 and RNAV 5 in ENR 1.3.4.2.
- 1.3.4.1.4 Aircraft operating under IFR on designated RNAV 1 and RNAV 5 routes shall be equipped with, as a minimum, RNAV equipment meeting the following requirements:
- a) A system use accuracy equal to, or better than, (2.5 NM) for one standard deviation, with a 95 % containment value of plus or minus 5 NM, thereby meeting the accuracy requirements for RNAV 5; and
- b) A system use accuracy equal to, or better than, (0.5 NM) for one standard deviation, with a 95 % containment value of plus or minus 1 NM, thereby meeting the accuracy requirements for RNAV 1; and
- c) An average continuity of service of 99.99 % of flight time.

■ 1.3.4.2 AREA OF APPLICABILITY

Area Navigation "RNAV" will be implemented within BAHRAIN FIR / BAHRAIN UIR within designated airspace on area basis as follows:

- All Lower Routes of Bahrain within TMAs are RNAV 1 with requirements.
- RNAV 5 will be implemented from TMA levels to FL 145. At Upper Routes RNAV 1 will be implemented from FL 150 to FL 460 within TMAs.

1.3.4.3 MEANS OF COMPLIANCE

Conformance to the navigation requirement shall be verified by the State of Registry or the State of Operator as appropriate.

Note: Guidance material concerning navigation accuracy requirements is contained in the Manual on Required Navigation performance (RNP) Doc 9613, Chapter 5.

1.3.4.4 FLIGHTS PLANNING

Operators of aircraft fitted with RNAV having a navigation accuracy meeting RNAV 5 shall insert the designator "R" in item 10 of the flight plan.

1.3.4.5 PROCEDURES FOR OPERATION IN RNAV 5 ROUTES

- 1.3.4.5.1 Correct operation of the aircraft RNAV system shall be verified before joining and during operation on an RNAV 5 route. This shall include confirmation that:
- a) The routing is in accordance with the clearance; and
- b) The aircraft navigation accuracy meets RNAV 5.
- 1.3.4.5.2 If, as a result of failure of the RNAV system or its degradation to below RNAV 5, an aircraft is unable to enter an ATS route designated as RNAV 5 or to continue operations in accordance with current air traffic control clearance, a revised clearance shall, wherever possible, be obtained by the pilot.
- 1.3.4.5.3 Subsequent air traffic control action in respect of that aircraft will be dependent upon the nature of the reported failure and the overall traffic situation. Continued operation in accordance with the current ATC clearance may be possible in many situations. When this

AIP BAHRAIN FIR ENR 1.3-3
3 MAR 16

cannot be achieved, a revised clearance may be required to revert to VOR / DME.

1.3.4.6 ATC PROCEDURES FOR AIRCRAFT EXPERIENCING FAILURE OR DEGRADATION OF THE RNAV SYSTEM

1.3.4.6.1 If, as a result of failure or degradation of the RNAV system, detected either before or after departure, the aircraft cannot meet the requirements of **ENR 1.3.4.1.4**, the following ATC procedures are applicable.

- 1.3.4.6.1.1 Coordination messages (PANS ATM / 501 Chapter 11, 11.4.2.3)
- a) Computer assisted coordination of estimate messages. In the case of automated messages not containing the information provided in item 18 of the flight plan, the sending air traffic control unit shall inform the receiving air traffic control unit by supplementing the ATC message verbally with the phrase "RNAV OUT OF SERVICE" after the call sign of the aircraft concerned.
- b) Verbal coordination of estimate messages. When a verbal coordination process is being used, the sending air traffic control unit shall include the phrase "RNAV OUT OF SERVICE" at the end of the message.
- 1.3.4.6.1.2 Pilot phraseology (PANS ATM / 501 Chapter 12)

The phrase "UNABLE RNAV DUE EQUIPMENT" shall be included by the pilot immediately following the aircraft call sign whenever initial contact on an air traffic control frequency is established.

1.3.4.6.1.2.1 All military formation flights are considered NON-RVSM within Bahrain UIR, Regardless of the RVSM status of individual Aircraft in the formation. These Aircraft's shall not be permitted in RVSM Airspace except in exceptional circumstances. These exceptions may be accommodated, subject to prior approval, on a workload or traffic-permitting basis.

1.3.4.7 ATC PROCEDURES FOR STATE AIRCRAFT NOT EQUIPPED WITH RNAV EQUIPMENT MEETING RNAV 5 REQUIREMENTS

- 1.3.4.7.1 Instructions for the completion of the flight plan (PANS ATM / 501 Appendix 2, A 2 3)
- 1.3.4.7.1.1 Operators of state aircraft not equipped with RNAV equipment meeting RNAV 5 shall not insert "S" or "R" in item 10 of the flight plan.
- 1.3.4.7.1.2 Since such flight require special handling by air traffic control, "STS / NORNAV" shall be inserted in item 18 of the flight plan.
- 1.3.4.7.2 Air traffic control clearances (PANS ATM / 501 Chapter 4, 4.5.7)
- 1.3.4.7.2.1 Within TMAs, state aircraft not equipped with RNAV approved for RNAV 5 should be routed via non RNAV SIDs and STARs.
- 1.3.4.7.2.2 Such aircraft operating en route should be routed via VOR / DME defined ATS routes.
- 1.3.4.7.2.3 When the above procedures cannot be applied, the air traffic control unit shall provide the aircraft with radar vectors until the aircraft is capable of resuming its own navigation.
- 1.3.4.7.3 Coordination messages (PANS ATM / 501 Chapter 11,11.4.2.3)
- a) Computer assisted coordination of estimate messages. In case of automated messages not containing the information provided in item 18 of the flight plan, the sending air traffic control unit shall inform the receiving air traffic control unit by supplementing the ATC message verbally with the phrase "NEGATIVE RNAV" after the call sign of the aircraft concerned.
- b) Verbal coordination of estimate messages. When a verbal coordination process is being used, the sending air traffic control unit shall include the phrase "NEGATIVE RNAV" at the end of the message.
- 1.3.4.7.4 Pilot phraseology (PANS ATM / 501 Chapter 12)

The phrase "NEGATIVE RNAV" shall be included by the pilot immediately following the aircraft call sign whenever initial contact on an air traffic control frequencies established.

1.3.4.8 **EQUIPMENT, REQUIREMENT AND CERTIFICATION**

RNAV 5 defines RNAV operations which satisfy a required track keeping accuracy of plus or minus 5 NM for at least 95 % of the flight time in accordance with the requirements set out in ICAO Document 7030 - Regional Supplementary Procedures for the Middle East region, as amended, and ICAO Document 9613 - Manual on RNP.

RNAV equipped aircraft operating on designated RNAV 5 routes in designated RNAV 5 routes airspace must be certified for RNAV 5 operations by the State of Operator or the State of Registry of the aircraft. Conformance to the navigation requirement shall be verified by the State of Registry or the State of Operator, as appropriate.

Foreign air carriers operating within BAHRAIN UIR shall ensure their operations specifications are updated to reflect RNAV 5 approvals.

The adress for information regarding RNAV 5 certification is:

Aviation Safety Section Air Transport Directorate Civil Aviation Affairs

ENR 1.3-4
3 MAR 16
AIP BAHRAIN FIR

P.O. Box 586 Kingdom of Bahrain TEL: +973 17321006 Telefax:+973 17321061 SITA: BAHAPYF

AIP BAHRAIN FIR ENR 1.4-1
25 MAY 17

ENR 1.4 ATS AIRSPACE CLASSIFICATION AND DESCRIPTION

1.4.1 ATS airspaces classification

ATS airspaces are classified and designated in accordance with the following:

Class A. IFR flights only are permitted, all flights are subject to air traffic control services and are separated from each other.

Class B. IFR and VFR flights are permitted, all flights are subject to air traffic control service and are separated from each other.

Class C. IFR and VFR flights are permitted, all flights are subject to air traffic control service and IFR flights are separated from other IFR flights and from VFR flights. VFR flights are separated from IFR flights and receive traffic information in respect of other VFR flights.

Class D. IFR and VFR flights are permitted and all flights are subject to air traffic control service, IFR flights are separated from other IFR flights and receive traffic information in respect of VFR flights, VFR flights receive traffic information in respect of all other flights.

Class E. IFR and VFR flights are permitted, IFR flights are subject to air traffic control service and are separated from other IFR flights. All flights receive traffic information as far as is practical.

Class F. IFR and VFR flights are permitted, all participating IFR flights receive an air traffic advisory service and all flights receive flight information service if requested.

Class G. IFR and VFR flights are permitted and receive flight information service if requested.

The requirements for the flights within each class of airspace are as shown in the following tables.

1.4.2 ATS airspace description

1.4.2.1 Within the BAHRAIN FIR / BAHRAIN UIR the Airspace is further divided into five classifications. A, B, C, D and G. Two ICAO Classifications, E and F which have been adopted by the Kingdom of Bahrain are available for use but at present no portions of BAHRAIN FIR / BAHRAIN UIR Airspace have been classified.

Airspace classified as A, B, C and D are Controlled Airspace.

The Airspace Classifications are described in subsequent paragraphs, and notifications, descriptions and procedures of individual Airspaces within each classification are contained in ENR 2, ENR 3 and AD 2.

1.4.2.2 Airspace Classification

1.4.2.2.1 Class A - Controlled Airspace

The provisions of Class A Airspace are shown below:

	IFR	VFR
Separation Provided	All Aircraft	
Service Provided	Air Traffic Control Service	VFR FLIGHT
VMC Minima	Not applicable	NOT
Speed Limitation	Not applicable	PERMITTED
Radio Communication	Continuous two - way	
ATC Clearance	Required	

BAHRAIN FIR / BAHRAIN UIR class A airspace, over international waters, is subject to high concentration of military activity acting in due regard in accordance with article 3 of the convention of International Civil Aviation.

Class A Airspace comprises

All controlled Areas (Airways) FL 150 and above. BAHRAIN CTA FL 150 and above.

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

1.4.2.2.2 Class B - Controlled Airspace

The provisions of Class B Airspace are shown below:

	IFR	VFR
Separation Provided	All Aircraft	All Aircraft
Service Provided	Air Traffic Control Service	Air Traffic Control Service
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility Clear of Cloud Below 10000 FT AMSL: 5 KM visibility Clear of Cloud
Speed Limitation	Not applicable	Not applicable
Radio Communication	Continuous two - way	Continuous two - way
ATC Clearance	Required	Required

Class B Airspace comprises

ISA AIRBASE CTR

1.4.2.2.3 Class C - Controlled Airspace

The Provisions of Class C Airspace are shown below:

	IFR	VFR
Separation Provided	IFR from IFR IFR from VFR	
Service Provided	Air Traffic Control Service	Air Traffic Control Service for separation from IFR VFR / VFR Traffic Information (and traffic avoidance advice on request)
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud Below 10000 FT AMSL: 5 KM visibility 1500 m horizontal and 1000 FT vertical distance from Cloud
Speed Limitation	Not applicable	250 KT IAS below 10000 FT AMSL
Radio Communication	Continuous two - way	Continuous two - way
ATC Clearance	Required	Required

Class C airspace comprises:

All Controlled Areas (Airways) at and above 4500 FT and below FL 150 BAHRAIN CTA below FL 150 $\,$

AIP BAHRAIN FIR ENR 1.4-3
17 SEP 15

1.4.2.2.4 Class D - Controlled Airspace

The provisions of Class D Airspace are shown below:

	IFR	VFR
Separation Provided	IFR from IFR	Not provided
Service Provided	Air Traffic Control Service including Traffic information about VFR flights (and traffic avoidance advice on request)	Traffic information between VFR and IFR Flights (and traffic avoidance advice on request)
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud Below 10000 FT AMSL: 5 KM visibility 1500 horizontal and 1000 FT vertical distance from Cloud
Speed Limitation	Not applicable	250 KT IAS below 10000 FT AMSL
Radio Communication	Continuous two - way	Continuous two-way
ATC Clearance	Required	Required

Class D Airspace comprises:

BAHRAIN CTR and TMA at and above 1000 FT and below 4500 FT

1.4.2.2.5 Class E - Controlled Airspace

The provisions of Class E Airspace are shown below

	IFR	VFR
Separation Provided	IFR from IFR	Not provided
Service Provided	Air Traffic Control Service including Traffic information about VFR flights as far as practicable	Traffic information as far as practicable
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud Below 10000 FT AMSL: 5 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud
Speed Limitation	250 KT IAS below 10000 FT AMSL	250 KT IAS below 10000 FT AMSL
Radio Communication	Continuous two - way	Not required
ATC Clearance	Required	Not required

No BAHRAIN FIR / BAHRAIN UIR Airspace is currently designated Class E.

1.4.2.2.6 Class F

The provisions of Class F Airspace are shown below:

	IFR	VFR
Separation Provided	IFR from IFR as far as practical	Not provided
Service Provided	Air Traffic Advisory Service Flight Information Service	Flight Information Service
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud Below 10000 FT AMSL: 5 KM visibility 1500 m horizontal and 1000 FT vertical distance from Cloud At and below 3000 FT AMSL or 1000 FT above terrain whichever is higher: 5 KM visibility and in sight of ground or water
Speed Limitation	250 KT IAS below 10000 FT AMSL	250 KT IAS below 10000 FT AMSL
Radio Communication	Continuous two - way	Not required
ATC Clearance	Required	Not required

1.4.2.2.7 Class G

The Provisions of Class G Airspace are shown below:

	IFR	VFR
Separation Provided	Not provided	Not provided
Service Provided	Flight Information service	Flight Information Service
VMC Minima	Not applicable	At and above 10000 FT AMSL: 8 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud Below 10000 FT AMSL: 5 KM visibility 1500 M horizontal and 1000 FT vertical distance from Cloud At and below 3000 FT AMSL or 1000 FT above terrain whichever is higher and speed greater than 140 KT 5 KM visibility Clear of cloud and in sight of ground or water or; At and below 3000 FT AMSL or 1000 FT above terrain whichever is higher and speed less than 140 KT 1500 M visibility clear of cloud and in sight of ground or water
Speed Limitation	250 KT below 10000 FT AMSL	250 KT IAS below 10000 FT AMSL
Radio Communication	Continuous two - way	Not required
ATC Clearance	Not required	Not required

AIP BAHRAIN FIR ENR 1.4-5
17 SEP 15

Class G Airspace comprises:

All BAHRAIN FIR / BAHRAIN UIR Airspace not covered by classes A, B, C and D.



AIP BAHRAIN FIR ENR 1.5-1
17 SEP 15

ENR 1.5 HOLDING, APPROACH AND DEPARTURE PROCEDURES

1.5.1 GENERAL

1.5.1.1 The holding, approach and departure procedures in use are based on those contained in the latest edition of ICAO DOC 8168 - OPS - procedures for Air Navigation Services - Aircraft Operation (PANS - OPS).

1.5.1.2 The holding and approach procedures in use have been based on the values and factors contained in Part II of the PANS - OPS. The holding patterns shall be entered and flown as indicated below:

Flight level (FL)	CAT A and B aircraft	Jet Aircraft			
		Normal conditions	Turbulence conditions		
Up to 13000 FT (4250 M) inclusive	170 KT	230 KT (425 KM / H)			
Above 13000 FT (4250 M) to FL 200 (6100 M) inclusive	240 KT (44	5 KM / H)	280 KT (520 KM / H) or (Mach 0.8) which ever is less		
Above FL 200 (6100 M) to FL 340 (10350 M) inclusive	265 KT (490 KM / H)				
Above FL 340 (10350 M)	0.83 Mach		0.84 Mach		

1.5.2 ARRIVING FLIGHTS

- 1.5.2.1 IFR flights entering and landing within, a Terminal Control Area will be cleared to a specified holding point and instructed to contact Approach Control at a specified time, level or position. The terms of this clearance shall be adhered to until further instructions are received from Approach Control. If the clearance limit is reached before further instructions have been received, holding procedure shall be carried out at the level last authorized.
- 1.5.2.2 Due to the limited airspace available, it is of importance that the approaches to the patterns and the holding procedures are carried out as exactly as possible. Pilots are strongly requested to inform ATC if for any reason the approach and / or holding cannot be performed as required.
- 1.5.2.3 No landing will be allowed to BAHRAIN INTERNATIONAL airport RWY 12R / 30L if the reported met visibility is less than 4000 M.
- 1.5.2.4 For CAT IILS approaches the localiser is not to be used below 200 FT AGL.
- 1.5.2.5 Pilots carrying out practice CAT II or III approaches are cautioned that ILS critical and sensitive areas are not protected to CAT II / III standards.
- 1.5.2.6 Instrument approach charts publish applicable Obstacle Clearance Altitude (OCA) for the procedure. This should not be confused with the Decision Altitude (DA) established by the operator in accordance with the provisions of ICAO Annex 6. However, in accordance with ICAO standards, the Decision Height for ILS approaches established by operators shall in no case be lower than ILS CAT I 200 FT above THR ELEV.
- 1.5.2.7 All ACFT arriving BAHRAIN INTERNATIONAL airport are requested to advise BAHRAIN GMC of ACFT registration after landing.
- 1.5.2.8 All ACFT arriving BAHRAIN INTERNATIONAL airport are required to adjust IAS as per the following speeds unless otherwise instructed by ATC:

Unless otherwise authorized by the ATC, no aircraft below 10000 FT MSL may operate at an indicated airspeed of more than 250 KT.

1.5.2.9 The longitudinal separation between aircraft established on final approach runway 30R/12L is reduced to 3NM.

1.5.3 DEPARTING FLIGHTS

- 1.5.3.1 IFR flights departing from controlled aerodromes will receive initial ATC clearance from the local Aerodrome Control Tower. The clearance limit will normally be at the aerodrome of destination. IFR flights departing from non-controlled aerodromes will not take off without prior arrangements with BAHRAIN ACC.
- 1.5.3.2 Detailed instructions will be issued with regard to routes, turns, etc. after take off.
- 1.5.3.3 Pilots are required to call BAHRAIN GROUND on freq 121.850 MHZ ten minutes prior to start up for the purpose of ATC

clearance delivery.

1.5.4 BAHRAIN AND DOHA TMAS, BAHRAIN CONTROL ZONE

1.5.4.1 REPORTING POINTS

The reporting points for aircraft taking off, operating, or landing within the Control Area are as instructed by ATC.

1.5.4.2 The reporting points for aircraft overflying the Control Area or Control Zone are as follows:

BHR DVOR / DME

Compulsory REP

Or such other positions as may, from time to time, be indicated in an ATC clearance.

- 1.5.4.3.1 En route holding points are as instructed by ATC.
- 1.5.4.3.2 High level holding will be carried out at FL 150 and above.
- 1.5.4.4 ROUTING

Aircraft are not permitted to route off the centre - lines of the published routes unless specifically instructed by ATC.

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 1.6-1
25 MAY 17

ENR 1.6 RADAR SERVICES AND PROCEDURES

1.6.1 PRIMARY RADAR

1.6.1.1 Radar Units

Radar units in the BAHRAIN FIR / BAHRAIN UIR operate as integral parts of the parent ATS unit and provide radar service, to the maximum extend practicable, to meet the operational requirement. Factors, such as radar coverage, controller workload, and equipment capabilities, may affect these services, and the radar controller shall determine whether he is able to provide, or continue to provide, radar services in any specific case.

1.6.1.2 Radar Service

A pilot will know when radar services are being provided because the radar controller will use the ATS callsign depending on the position of the aircraft in BAHRAIN FIR / BAHRAIN UIR and under what ATS unit the aircraft is operating, followed by "Radar" for example:

- a) Aircraft under Area Control "BAHRAIN RADAR";
- b) Aircraft under Approach Control "BAHRAIN APPROACH".

1.6.1.3 RADAR COVERAGE

The following radar units operate within the BAHRAIN FIR / BAHRAIN UIR:

a) BAHRAIN MSSR:

Position: 261637.66 N 0503751.96 E

Range: 240 NM

b) BAHRAIN TAR with co - located MSSR:

Position: 261600.45 N 0503845.69 E

Range: Primary 80 NM, Secondary 256 NM

(Note that Bahrain may delegate the resonsibility for providing ATS, FIS and Alerting Service to other radars when aircraft are within their cover in the BAHRAIN FIR / BAHRAIN UIR.)

1.6.1.4 THE APPLICATION OF RADAR CONTROL SERVICE

1.6.1.4.1 RADAR IDENTIFICATION is achieved according to the provisions specified by ICAO.

1.6.1.4.2 RADAR SERVICES

Radar control service is provided in controlled airspace to aircraft operating within BAHRAIN CTA and on airways within Bahrain radar coverage. These services may include:

- a) radar separation of arriving, departing and en -route traffic;
- b) radar monitoring of arriving, departing and en -route traffic to provide information on any significant deviation from normal flight path;
- c) radar vectoring when required;
- d) assistance to aircraft in emergency;
- e) assistance to aircraft crossing controlled airspace;
- f) warnings and position information on other aircraft considered to constitute a hazard;
- g) information to assist in the navigation of aircraft;
- h) information on observed weather.

Radar Advisory Service and Flight Information Service are provided to identified aircraft operating within the BAHRAIN FIR / BAHRAIN UIR to the extent possible within radar cover.

1.6.1.4.3 MINIMUM HORIZONTAL RADAR SEPARATION

BAHRAIN PSR (TAR Range 80): 20 NM when one aircraft is supersonic, otherwise 5 NM.

BAHRAIN MSSR: 20 NM when one aircraft is supersonic, otherwise 10 NM reducing to 5 NM within 150 NM of radar head.

TERRAIN CLEARANCE

Flight Levels assigned by a radar controller to pilots will provide a minimum terrain clearance according to the phase of flight.

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

ENR 1.6-2 AIP BAHRAIN FIR

3 MAR 16

1615 RADAR AND RADIO FAILURE PROCEDURES

16151 Radar failure

In the event of radar failure or loss of radar identification, instructions will be issued to restore non - radar standard separation and the pilot will be instructed to communicate with the parent ATS unit.

16152 Radio failure

- The radar controller will establish whether the aircraft radio receiver is working by instructing the pilot to operate the SSR 1.6.1.5.2.1 transponder (see also GEN 1.5) or, if the aircraft is not SSR equipped, to carry out a turn. If appropriate actions are observed the radar controller will continue to provide radar services to the aircraft.
- 1.6.1.5.2.2 Aircraft unable to receive radio transmissions shall comply with the ICAO radio communication failure procedures as detailed in Annex 2 para 3.6.5. If radar identification was established prior to radio failure the radar controller will vector other identified aircraft clear of the radio failure aircraft until such time as the aircraft leaves radar coverage or has landed.
- 1.6.1.5.2.3 Flights departing from BAHRAIN INTERNATIONAL airport on a radar clearance and experiencing a total radio communication failure shall carry out the following procedures:

IN VMC:

Continue to fly in VMC and land at the nearest suitable aerodrome.

In IMC:

Maintain last assigned heading and flight level or altitude for a period of three minutes after departure or to a distance of 12 DME BAH whichever occurs earlier. Thereafter continue according to current flight plan by routing direct to the first en - route reporting point and climbing to the last acknowledged en -route flight level cleared by ATC.

1616 AIRBORNE COLLISION AVOIDANCE SYSTEM (ACAS)

All aircraft fitted with ACAS II equipment, shall be fitted with software version 7.1 with mode S transponder compliant with Annex 10, Volume IV within the OBBB EFF 1st Jan 2017.

REF. ICAO DOC 8168 - OPS / 611 VOL. I PART VIII CHAPTER 3

- The information provided by ACAS is intended to assist pilots in the safe operation of aircraft. The traffic alert and collision 16161 avoidance system - TCAS II is accepted as a suitable system provided the installation is certified for use by the State of Registry of the aircraft concerned and it's operation is in accordance with instructions for use of the equipment laid down in the company operations manual issued by the aircraft operator.
- 1.6.1.6.2 Nothing in the following procedures shall prevent pilots - in - command from exercising their best judgement and full authority in the choice of the best course of action to resolve a traffic conflict.


1.6.1.7 **USE OF ACAS INDICATIONS**

ACAS indications are intended to assist pilots in the active search for, and visual acquisition of, the conflicting traffic and the avoidance of potential collisions. The following safety considerations apply:

- a) Pilots shall not manoeuvre their aircraft in response to traffic advisories only;
 - Note: Traffic advisories are intended to assist in visual acquisition of conflicting traffic and to alert the pilot to the possibility of a resolution advisory. The restriction in the use of traffic advisories is due to the limited bearing accuracy and to the difficulty in interpreting altitude rate from displayed traffic information.
- b) In the event of a resolution advisory, ATC will expect the pilot to respond. If avoiding action is necessary, alteration of flight path should be limited to the minimum extent necessary to comply with the resolution advisories;
- Pilots who deviate from an air traffic control clearance in response to a resolution advisory shall promptly return to the terms of the previous air traffic control instruction or clearance when the conflict is resolved and shall notify the appropriate ATC unit as soon as possible.

AIP BAHRAIN FIR ENR 1.6-3
17 SEP 15

INTENTIONALLY BLANK

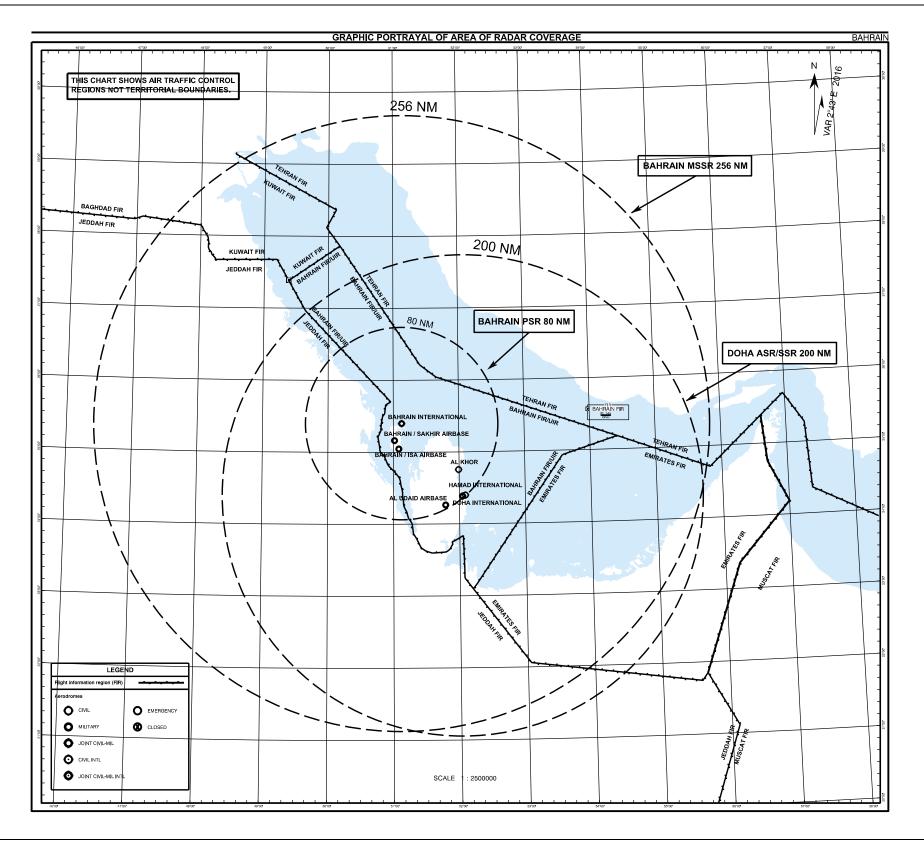

AIRAC AMDT 06/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 1.6-5
17 SEP 15

INTENTIONALLY BLANK

ENR 1.6-6
AIP BAHRAIN FIR
17 SEP 15

1.6.2 SECONDARY SURVEILLANCE RADAR (SSR)

1.6.2.1 Emergency Procedures

1.6.2.1.1 Except as provided for paragraph **ENR 1.6.2.2** below, pilot shall operate transponders and select modes and codes in accordance with ATC instructions. In particular, when entering BAHRAIN FIR / BAHRAIN UIR pilots who have already received specific instructions from ATC concerning the setting of the transponder shall maintain that setting until otherwise instructed.

1.6.2.1.2 Pilots of aircraft about to enter the BAHRAIN FIR / BAHRAIN UIR who have not received specific instructions from ATC concerning the setting of the transponder shall operate the transponder on Mode A / 3 Code 2000 before entry and maintain that setting until otherwise instructed.

Mode C, if fitted, is to be selected at all times.

- 1.6.2.1.3 If the pilot of an aircraft encountering a state of emergency has previously been instructed by ATC to operate the transponder on a specific code, this code setting shall be maintained until otherwise advised. In all other circumstances, the transponder shall be set to Mode A / 3 Code 7700.
- 1.6.2.1.4 Notwithstanding the procedures set out above, a pilot may select Mode A / 3 Code 7700 whenever the nature of the emergency is such that this appears to him to be the most suitable course of action.

Note: Continuous monitoring of responses on Mode A / 3 Code 7700 is provided.

1.6.2.2 Radio communication failure and unlawful interference procedures

1.6.2.2.1 Radio Communication failure procedures

In the event of an aircraft radio receiver failure, a pilot shall select Mode A / 3 Code 7600 and follow established procedures, and subsequent control of aircraft will be based on these procedures.

1.6.2.2.2 Unlawful Interferernce procedure

Pilots of aircraft in flight subjected to unlawful interference shall endeavour to set the transponder to Mode A Code 7500 to give indication of the situation, unless circumstances warrant the use of A / 3 Code 7700.

Note: Continuous monitoring in responses on Mode A / 3 Code 7500 is provided.

1.6.2.3 System of SSR Code assignment

Codes are assigned according to the ICAO "ORIGINATING REGION CODE ALLOCATION METHOD2 - ORCAM - for the MID / ASIA Region.

1.6.2.4 Mode S operation within OBBB FIR

1.6.2.4.1 INTRODUCTION

The provision of air traffic services (ATS) using SSR Mode S in Bahrain FIR airspace will rely on a unique ICAO 24-bit aircraft address for selective interrogation of individual aircraft. The 24-bit aircraft address is also an essential element of the airborne collision avoidance system (ACAS II). In addition, Mode S surveillance requires the reporting of aircraft identification as stated below.

Pilots of aircraft equipped with mode 'S' transponder having an aircraft identification feature shall set the aircraft identification in the transponder while operating within OBBB FIR. This setting shall correspond to the aircraft identification specified in item 7 of the standard ICAO FPL, or if no FPL has been filed, the aircraft registration. ATC equipment requires strict compliance with mode 'S' settings to ensure proper radar tracking. Inability to comply with these requirements may result in aircraft being denied entry into OBBB class 'A' airspace.

The aircraft address shall be one of 16 777 214 twenty-four-bit aircraft addresses allocated by ICAO to the State of Registery or common mark registering authority and assigned as prescribed in the ICAO Annex 10.

All Mode S equipped aircraft engaged in international civil aviation are required to have an aircraft identification feature as prescribed in ICAO Annex 10.

This guidance is provided to ensure consistency regarding 24-bit aircraft addresses and the reporting of aircraft identification relevant to the operational introduction of Mode S Elementary and Enhanced Surveillance. In particular:

- 1. Adherence to the world-wide scheme for assignment of ICAO 24-bit Aircraft Addresses.
- 2. Correct setting of Aircraft Identification by flight crew.

1.6.2.4.2 THE ICAO 24-BIT AIRCRAFT ADDRESS

Instances occur of incorrect 24-bit aircraft addresses being installed/hard-wired on individual aircraft. This has happened not only on first installation of Mode S transponder but also when a major modification has been made to the Mode S equipment, and following a change of State of Registration. Incorrect installation, such as setting the address to all zeros, or, inadvertent duplication of an address can pose a severe risk to flight safety. In particular, the airborne collision avoidance system (ACAS II), performs on the assumption that only a single, unique 24-bit aircraft address per airframe exists. The performance of ACAS II can be seriously degraded and in some instances disabled if an incorrect

AIP BAHRAIN FIR ENR 1.6-7
25 MAY 17

or duplicate address is installed on an aircraft. Incorrect or duplicated 24-bit aircraft addresses will also undermine the effectiveness of surveillance services based on SSR Mode S.

It is essential that aircraft operators comply with the aircraft address assignment procedures of the state regulatory authority to which blocks of addresses have been allocated by ICAO.

Note: Telephony designators for aircraft operating agencies are contained in ICAO Doc 8585.

The world-wide addressing scheme has been designed so that, at any one time, no address is assigned to more than one aircraft. Only one address can be assigned to an aircraft and it can not be changed except under exceptional circumstances authorised by the State Regulatory Authority concerned.

When an aircraft changes it's State of Regulatory of Registry, the previously assigned address is to be relinquished and a new address assigned by the new registering authority.

It is essential that the aircraft address is periodically verified using ramp tests. Such checks must also be conducted when a major maintenance check has taken place and when the aircraft has changed registration, to ensure that a newly assigned address has been properly set.

1.6.2.4.3 CORRECT SETTING OF AIRCRAFT IDENTIFICATION

To comply with airborne equipment requirements, Mode S transponder equipped aircraft must incorporate an Aircraft Identification Feature. Correct setting of aircraft identification is essential for the correlation of radar tracks with flight plan data in the ATM and Airport Operator ground systems. Initial operational trials using SSR Mode S have shown that many aircraft are transmitting incorrect aircraft identification, e.g. J9165 instead of JZR165. Such erroneous settings of aircraft identification prohibit automatic flight plan correlation and, if perpetuated, will severely limit the effectiveness of Mode S to relieve the shortage of SSR codes.

In accordance with ICAO Doc 8168 [PANS-OPS] Vol. I, Part III, flight crew of aircraft equipped with Mode S having an aircraft identification feature shall set the aircraft identification in the transponder. The setting shall correspond to the aircraft identification specified in item 7 of the ICAO flight plan, or, if no flight plan has been filed, the aircraft registration.

Note: All Mode S equipped aircraft engaged in international civil aviation are required to have an aircraft identification feature.

Note: No zeroes, dashes or spaces are to be added when the aircraft identification consists of less than 7 characters.

Mode (S) and Selected Altitude use in the OBBB FIR

The provision of the selected altitude set by aircrew, to the controller, gives them the ability to intervene, where the selected altitude does not match the clearance. This greatly reduces the chance of a Level Bust.

Selected altitude data is presented as either a flight level or an altitude, depending on surveillance system settings, For ATC and Air-Ground Communication purposes, the generic phrase 'Seleted level' is often used to encompass data presented as either an altitude or flight level.

The following factors are preventable, using the display of a Selected Altitude / CFL mismatch:

- Correct pilot Read-back or Hear-back followed by incorrect action;
- Incorrect pilot read-back by correct aircraft;
- Pilot read-back by incorrect aircraft.

The ATM System will generate an alert where there is a discrepancy between the Cleared Level and the aircraft Selected Altitude; Controllers are required to advise the pilot using the following phrase; "(Callsign), Check Selected Level. Cleared Level is (correct cleared level)"

Pilots of Mode (S) equipped aircraft, operating within the OBBB FIR shall ensure that their current cleared level is set as the selected altitude in the aircraft mode control panel, unless established on final approach for OBBI.

Any failure to comply with the above, pilots shall immediately inform ATC.

1.6.2.4.4 FURTHER INFORMATION


Or quidance may be obtained from:

Bahrain Senior Air Traffic Control Officer

+973 17 32 9927

satco@mtt.gov.bh

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

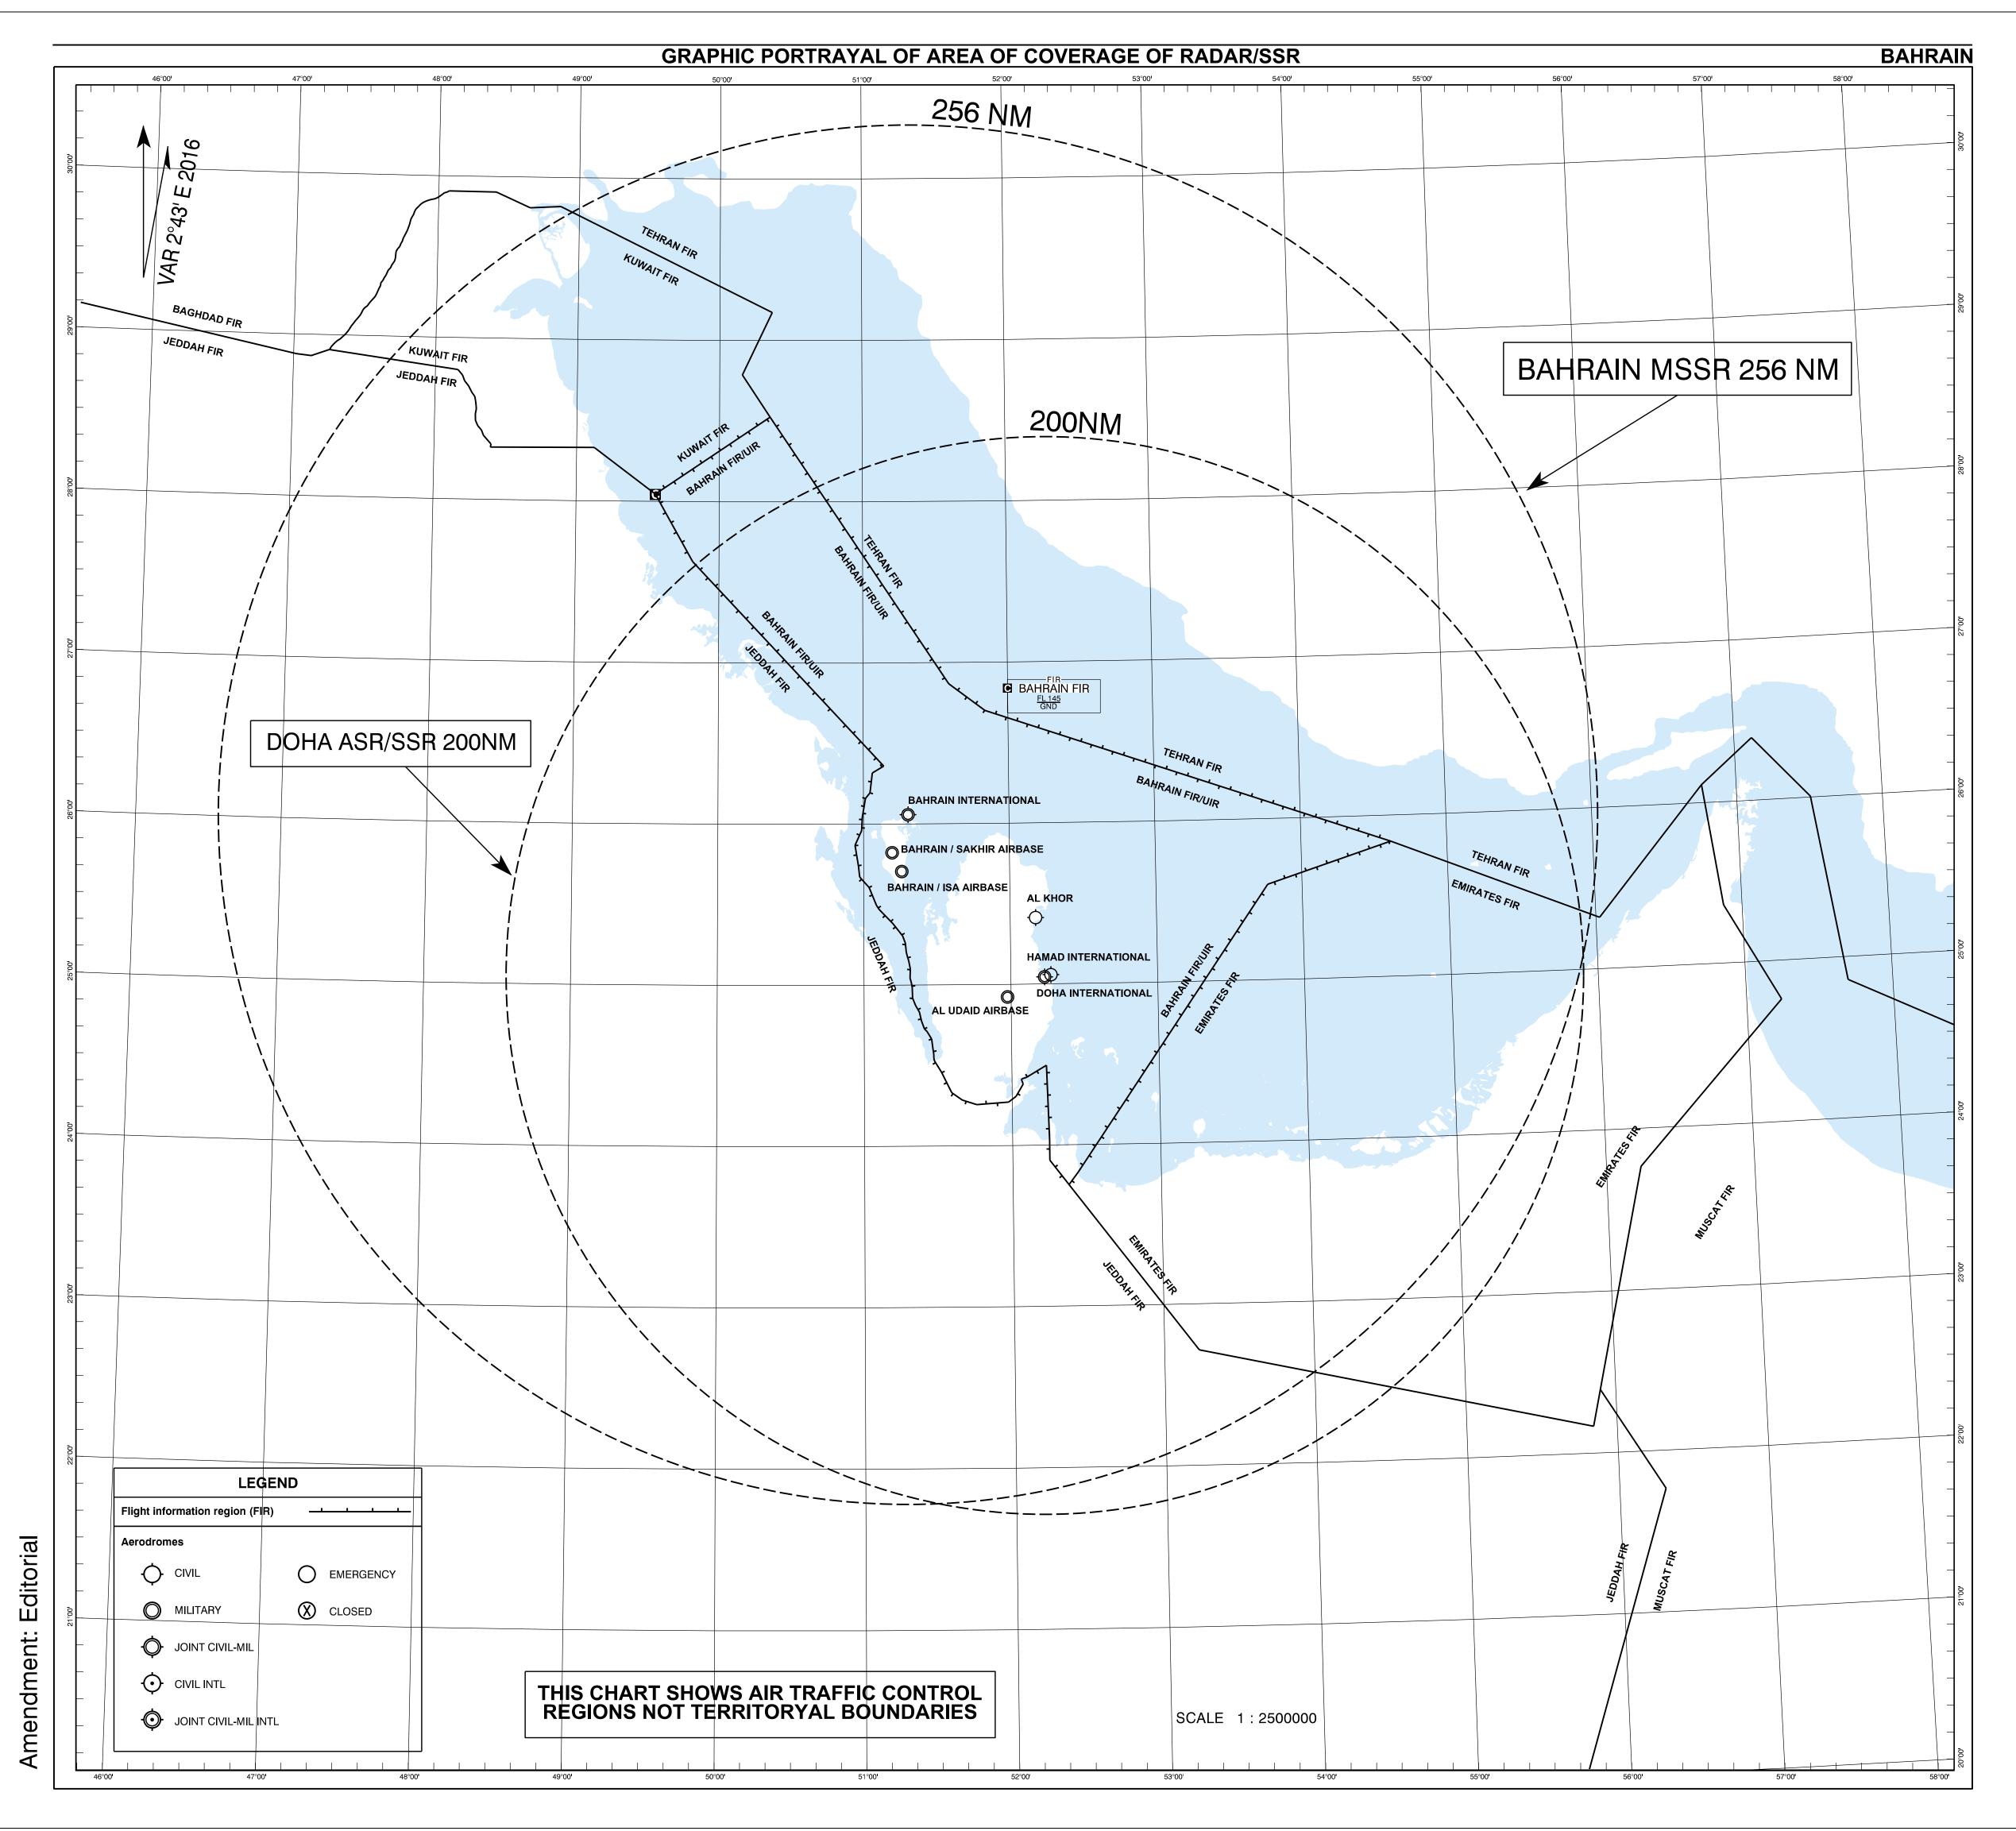

AIP BAHRAIN FIR ENR 1.6-9
17 SEP 15

INTENTIONALLY BLANK



AIP BAHRAIN FIR ENR 1.7-1
17 SEP 15

FNR 1.7 ALTIMETER SETTING PROCEDURES

1.7.1 INTRODUCTION

The Altimeter setting procedures in use generally conform to those contained in ICAO Doc 8168 - OPS, / 611 Volume 1 and DOC 7030, and are given in full below. QNH reports and temperature information for use in determining adequate terrain clearance are provided in MET broadcasts, and are available on request from Air Traffic Services Units. QNH values are given in whole hectopascals.

1.7.2 BASIC ALTIMETER SETTING PROCEDURES

1.7.2.1 **General**

- 1.7.2.1.1 The Transition Altitude is fixed at 13000 FT AMSL for the entire BAHRAIN FIR. The Transition level is fixed at FL 150 for the entire BAHRAIN FIR / BAHRAIN UIR.
- 1.7.2.1.2 Vertical displacement of aircraft at or below the Transition Altitude is expressed in terms of altitude. Vertical displacement of aircraft at or above the Transition Level is expressed in terms of Flight Levels. While an aircraft is passing through the Transition Layer, vertical displacement is expressed as altitude when descending, and as Flight Levels when climbing.
- 1.7.2.1.3 Flight Level Zero is located at the atmospheric pressure level of 1013.2 HPA (29.92"). Consecutive Flights are separated by a pressure interval corresponding to 500 FT in the Standard Atmosphere below FL 290, and by a pressure interval corresponding to 1000 FT above FL 290. Simultaneous flight at both the Transitional Altitude and the Transition Level is permissible as a minimum of 1000 FT separation exists between the two layers, however, level flight within the Transition Layer is not permitted.

1.7.2.2 Take - off and climb

- 1.7.2.2.1 A QNH altimeter setting is made available to aircraft in the routine take off and climb instructions.
- 1.7.2.2.2 Vertical displacement of aircraft during the climb is controlled by reference to altitudes until reaching the Transition Altitude, above which vertical displacement is controlled by reference to Flight Levels. In this context, the word "controlled" is used in a composite sense in that a pilot will wish to fly his aircraft at predetermined Flight Levels or altitudes, and Air Traffic Services will wish to advise the pilot of the availability of Flight Levels and altitudes. Both are concerned with the vertical position of aircraft.

1.7.2.3 En - route at and below the transition altitude - altimeter pressure setting

BAHRAIN INTERNATIONAL airport QNH

1.7.2.4 Vertical separation - En-route

- 1.7.2.4.1 Aircraft shall be flown En-route at Flight Levels at all times when above 13000 FT AMSL.
- 1.7.2.4.2 When complying with the semi-circular system of cruising levels of Annex 2, an aircraft shall be flown at Flight Levels or Flight Altitudes corresponding to the magnetic track as shown in the following table:

Magnetic Track	000°	- 179°	180°	- 359°
Flight Rules	IFR	VFR	IFR	VFR
Flight Altitudes		1500	2000	2500
	3000	3500	4000	4500
	5000	5500	6000	6500
	Up to 13000	Up to 11500	Up to 12000	Up to 12500
Flight Levels	150		160	
	170		180	
	190		200	
	Up to 290		Up to 280	
	310		300	
	330		320	
	350		340	
	370		360	
	390		380	

Magnetic Track	000°	- 179°	180° - 359°				
Flight Rules	IFR	VFR	IFR	VFR			
	etc		etc				

1.7.2.5 Approach and landing

- 1.7.2.5.1 A QNH altimeter setting is made available in the routine approach and landing instructions.
- 1.7.2.5.2 Vertical displacement of aircraft during approach is controlled by reference to Flight Levels until reaching the Transition Level, below which vertical displacement is controlled by reference to altitudes.

Note: This does not preclude a pilot from using a QFE setting to terrain clearance purposes during the final approach of the runway.

1.7.2.6 Missed approach

The relevant portions of ENR 1.7.2.1, ENR 1.7.2.2 and ENR 1.7.2.5 shall be applied to the case of a missed approach..

1.7.3 DESCRIPTION OF ALTIMETER SETTING REGION

There is a single altimeter pressure setting region which covers the entire BAHRAIN FIR / BAHRAIN UIR, however see ENR 1.7.2.2.2.

1.7.4 PROCEDURES APPLICABLE TO OPERATORS, INCLUDING PILOTS

The levels at which flight is to be conducted shall be specified in a Flight Plan;

- a) in terms of Flight Levels, if the flight is to be conducted at or above the Transition Level, and
- b) in terms of altitudes of the flight is to be conducted in the vicinity of an aerodrome, and at or below the Transition Altitude.

Note: Short flights in the vicinity of an aerodrome may often be conducted only at altitudes below the Transition Altitude.

Note: Flight Levels are specified in a plan by number; and not in terms of feet as is the case with altitudes.

1.7.5 TABLE OF CRUISING LEVELS

	TRACK												
		From	າ 000° to 17	′9°		From 180° to 359°							
	IFR Flights VFR Flights				IFR Flight	s		VFR Fli	ghts				
FL	Altit	Altitude FL Altitude		FL	Altit	ude	FL	А	ltitude				
	Metres	Feet		Metres	Feet		Metres	Feet		Metres	Feet		
	900	3000		450	1500		600	2000		750	2500		
	1500	5000		1050	3500		1200	4000		1350	4500		
	2150	7000		1700	5500		1850	6000		2000	6500		
	2750	9000		2300	7500		2450	8000		2600	8500		
	3350	11000		2900	9500		3050	10000		3200	10500		
	3950	13000		3500	11500		3650	12000		3800	12500		
150			Class A a	irspace	l	160			Class	A airspace			
170						180							
190						200							
210						220							
230						240							
250					260								
270						280							

	TRACK										
From 000° to 179°					From 180° to 359°						
IFR Flights VFR Flights				IFR Flight	s		VFR Fligl	nts			
FL	Altit	ude	FL	Altit	tude	FL	Altit	ude	FL	Alti	tude
	Metres	Feet		Metres	Feet		Metres	Feet		Metres	Feet
290				· · · · · · · · · · · · · · · · · · ·							
310						320					
330						340					
350				irspace RVSM	1 applied	360				e RVSM applie	d
370			(See ENF	R 1.10)		380		(See EN	IK 1.10)		
390						400					
410											
450			Class A a	Class A airspace		430			Class	A airspace	
490						470					
etc.						etc.					



AIP BAHRAIN FIR ENR 1.8-1
17 SEP 15

ENR 1.8 REGIONAL SUPPLEMENTARY PROCEDURES (DOC 7030 / 5)

The Supplementary Procedures in force, directly applicable to aircraft are given in their entirety. Differences are printed in heavy face italic type.

DOC 7030 part 1

Reference Procedure

1.1 Visual Flight Rules (VFR)

(Annex 2 - 4.6)

VFR flights to be operated within a control zone established at an aerodrome serving International Flights and in specific portions of the associated terminal control area shall:

- 1. have two way radio communications;
- 2. obtain clearance from the appropriate air traffic control unit; and
- 3. report position as required

Note: The phrase "specified portions of the associated terminal control area" is intended to signify at least those portions of the TMA used by International IFR Flights in association with approach, holding, departure and noise abatement procedures.

1.2.1.1 Instrument Flight Rules (IFR)

(Annex 2 - 2.2. and Chapter 5)

Flights shall be conducted in accordance with the Instrument Flight Rules (even when not operating in instrument meteorological conditions) when operated:

- 1. more than 100 NM seaward from the shoreline within controlled airspace; or
- 2. at or above Flight Level 150

3.0 A / G communications and in - flight reporting

(ANNEX 2 -3 6.3, 3.6.5, and 5.3.3 and PANS ATM / 501 Chapter 4, 4 - 11)

All aircraft on VFR flights, and aircraft on IFR flights outside controlled airspace, shall maintain a watch on a radio station furnishing communications for the unit providing flight information service in the flight information region and file with that station information as their position unless otherwise authorized by the State overflown.

Reference Procedure

- 3.4.1.2 The aircraft call sign / identification shall be transmitted immediately before or after the word "position".
- 3.4.1.3 The position of the aircraft shall be transmitted in reference to a reporting point name, name code designator or, if not named:
- 1. for flights operating in a predominantly east west direction:
 - a) latitude in degrees and minutes; and
 - b) longitude in degrees only;
- 2. for flights operating in a predominantly north south direction:
 - a) latitude in degrees only; and
 - b) longitude in degrees and minutes.
- 3.4.1.4 The time at which the aircraft is over the reporting point shall be transmitted in four digits, giving both the hour and the minutes.
- 3.4.1.5 The altitude / flight level of the aircraft shall be included in the position report.
- 3.4.2.1 Next position and time shall normally be expressed as the reporting point name, name code designator or latitude and longitude as indicated in 3.4.1.3.
- 3.4.2.2 Estimated time over the next position shall be expressed in four digits.
- 3.4.3.1 Ensuing position information shall include the name, name code designator or coordinates of the next succeeding reporting point, whether compulsary or not.

4.0 Special Procedures for in - flight contingencies

General Procedures

The following general procedures apply to both subsonic and supersonic aircraft

17 SEP 15

4.2.1 If an aircraft is unable to continue flight in accordance with its Air Traffic Control Clearance, a revised Clearance shall be obtained at the earliest possible time and, in the meantime, the aircraft shall broadcast position (including ATS route designator or the track code, as appropriate) and intentions, on frequency 121.500 MHZ at suitable intervals until Air Traffic Control Clearance is received.

12.1.1 Alerting and Search and Rescue Services - Routes and equipment of Private Aircraft

Annex 6 - part II - 6.3 and 6.4):

General Aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- 1. carry appropriate survival equipment;
- follow the routes or specified procedures if not equipped with two way radio except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.

Reference Procedure

12.2 Alerting Services

(PANS ATM / 501 Chapter 9 & Chapter 10, 10 - 2)

The procedures for "Alerting Service" detailed in PANS RAC, Part V1.2 are applicable to all flights except those conducted wholly in the vicinity of an aerodrome when exempted by the appropriate air traffic control unit.

DOC 7030 / 4, Part 2

Referrence Procedure

1.0 AERONAUTICAL MOBILE SERVICE

1.1 Languages to be used in radiotelephony

(A10, Vol. 11, 5.2.1.1.2, Note 2)

1.1.1 English is used in radiotelephony

2.0 AERONAUTICAL FIXED SERVICE

2.1 Priority of MOTNE messages on AFTN

NII

3.0 RADIO FREQUENCIES

3.1 Air - to - air channel

(A10, Vol. 1, Part 11 - 4.1.3.2)

3.1.1 The frequency 123.450 MHZ has been approved for use as the air - to - air channel to enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

DOC 7030 / 4, Part 3

1.1 Aircraft observations and Reports

(Annex 3 - Chapter 5)

Aircraft within the BAHRAIN FIR / BAHRAIN UIR shall make and record routing observations at the ATS / MET reporting points indicated in the Regional Plan.

Regional Supplementary Procedures

DOC 7030 / 4

The Supplementary Procedures in force, directly applicable to ATSUs and indirectly applicable to aircraft, are not given in their entirety. The relevant differences are given but only differences from ICAO have been published in full.

Reference Differences

NIL

AIP BAHRAIN FIR ENR 1.9-1 17 SEP 15

ENR 1.9 AIR TRAFFIC FLOW MANAGEMENT (ATFM) AND AIRSPACE MANAGEMENT

1.9.1 Air traffic flow management structure, service area, service provided location of unit and hours of operation

Service provided

Within the BAHRAIN FIR / BAHRAIN UIR there is no requirement for Strategic Flow Management at present, or in the forseeable future, and the establishment of a Regional Flow Management Unit is perceived as not being necessary. Tactical Flow Management is implemented from time to time, as required.



AIP BAHRAIN FIR ENR 1.10-1
17 SEP 15

ENR 1.10 FLIGHT PLANNING

(Restriction, Limitation or advisory Information)

1.10.1 PROCEDURES FOR THE SUBMISSION OF A FLIGHT PLAN

A flight plan shall be submitted in accordance with Annex 2, para 3.3.1 prior to operating:

- a) any IFR flight,
- b) any VFR flight.
 - i. departing from or destined for an aerodrome within a CTR;
 - ii. crossing any CTR within BAHRAIN FIR;
 - iii. across any International State Boundary or the FIR / UIR boundary.

Time of submission

Except for repetitive flight plans, a flight plan shall be submitted at least 60 minutes prior to departure, taking into account requirements for timely information of ATS units in airspace along the route to be flown, including requirements for early submission for ATS Air Traffic Flow Management (ATFM) purposes.

Place of submission

- a) Flight plans shall be submitted at the Air Traffic Services Reporting Office (ARO) at the departure aerodrome.
- b) In absence of such office at the departure aerodrome, a flight plan shall be submitted by telephone, telefax or teletype to the nearest ARO as listed below, (except as indicated under c.). An acknowledgement of receipt must be obtained prior to departure when using telefax or teletype.

BAHRAIN ARO

TEL: +973 17321181 / +973 17321182

Telefax:+973 17323876

c) For domestic flights from an uncontrolled to a controlled aerodrome a flight plan shall be submitted by telephone to the ARO at destination.

VFR flight plan for alerting service only

Alerting service in principle provided to flights for which a flight plan has been submitted.

Contents and form of flight plan

- a) ICAO flight plan forms are available at ARO's and airport offices at uncontrolled aerodromes. The instructions for completing those forms shall be complied with.
- b) Flight plans concerning IFR flights and international VFR flights shall include FIR / UIR boundary estimates.
- c) When a flight plan is submitted by telephone, teletype or telefax, the sequence of items of the flight plan form shall be strictly adhered to.

Adherence to ATS route structure

No flight plans shall be filed for routes deviating from the published ATS route structure, unless prior permission has been obtained from BAHRAIN ACC.

Authorization for special flights

Flights of a specific character such as survey flights, scientific research flights etc. may be exempted from the restriction specified above.

Request for exemption shall be mailed so as to be received at least one week before the intended day of operation to:

Undersecretary for Civil Aviation Bahrain Civil Aviation Affairs P.O. Box 586 Kingdom of Bahrain

1.10.2 REPETITIVE FLIGHT PLAN SYSTEM

General

The procedures concerning the use of Repetitive Flight Plans (RPL) conform to ICAO Document 7030 and PANS RAC 12th edition. Except where indicated hereunder.

REPETITIVE FLIGHT PLANS / FLIGHT SCHEDULE DATA LISTS

Pending full implementation of the RPL concept, RPLs are transmitted on the AFTN as if they were Filed Flight Plans.

1.10.2.1 Operators are required to provide advance details of Season Scheduled Services operating within the BAHRAIN FIR / BAHRAIN

ENR 1.10-2 AIP BAHRAIN FIR 17 SEP 15

UIR at least 14 days in advance of implementation or change, to the Flight Data Processing Unit (FDPU).

The Flight Data Processing Unit Aeronautical Information Services Office P.O. Box 586 Kingdom of Bahrain

Note: The submission of such details to Air Traffic Control does not constitute a request for approval of flight schedules.

1.10.2.1.1 This Data is required to be presented, on separate sheet for each 12 hours UTC of each day, in the format shown in the "REPETITIVE FLIGHT PLAN LISTING".

Note: There is a requirement to indicate in Column Q for all flights the Entry point Designator for BAHRAIN FIR / BAHRAIN UIR with EST (UTC).

1.10.2.1.2 Incidental changes and cancellations of RPL

Incidental changes to and cancellations of RPL relating to departures from BAHRAIN INTERNATIONAL airport shall be notified as early as possible and not later than 30 minutes before departure to:

BAHRAIN ARO

TEL: +973 17321181 / +973 17321182 for departures from BAHRAIN INTERNATIONAL airport.

RPL Lists shall be replaced in their entirety by new lists prior to the instruction of the summer and winter schedules.

1.10.2.1.3 **Delay**

When a specific flight is likely to encounter a delay of one hour or more in excess of the departure time stated in the RPL, the ATS unit serving the departure aerodrome shall be notified immediately.

Note: Failure to comply with this procedure may result in the automatic cancellation of the RPL for that specific at one or more of the ATS unit concerned

1.10.2.1.4 ATS messages

For a flight operated on a RPL, a flight plan message (FPL) will be transmitted pending full implementation of the RPL concept in the region. Departure messages (DEP) or Delay messages (DLA) relating to such flights will also be transmitted to appropriate ATS units.

1.10.2.2 FLIGHT PLANS

- 1.10.2.2.1 Scheduled Flights departing from airfields in the FIR
- 1.10.2.2.2 Standard Flight Plans for flights must be filed with the Aerodrome / Heliport AIS Unit at the aerodrome of departure, or
- 1.10.2.2.3 Alternatively, by direct arrangement between the operator and the local ATC Unit involved, a Standard ICAO Flight Plan may be stored at the aerodrome of departure and activated by that unit at 0001 UTC on the day of operation.

1.10.2.3 CHANGES TO FLIGHT DETAILS

1.10.2.3.1 Permanent Changes

Changes of permanent nature to any of the details previously supplied (under **ENR 1.10.2.2.1** and **ENR 1.10.2.2.2** above) require that complete details must be advised, both to the FDPU at Bahrain and to any other aerodrome concerned within the FIR, either by a completely new replacement plan, or by clear "insert / delete" editing instructions.

1.10.2.3.2 Temporary Changes

1.10.2.3.2.1 Extra flights require submission of both

- a) a standard Flight Plan, and
- b) Flight Data details to BAHRAIN FDPU.

1.10.2.3.2.2 Replacement flights, (i.e. Flights with temporary changes to details which have been submitted under ENR 1.10.2.1.1 and ENR 1.10.2.2.2 above) require a Standard Flight Plan clearly annotated in item 12 "Replacement of Scheduled Flight (c / s) of ... (date)";

Note: Flight Schedule Data Lists are required by ATSUs to prepare Air Traffic Control Data Systems in advance, thus reducing the possibility of traffic delay resulting from work - load in peak periods. Timely provision of Scheduled Flight Data, preferably more than the prescribed 14 days in advance, is therefore in the best interests of operators of scheduled air transport.

AIP BAHRAIN FIR ENR 1.10-3
17 SEP 15

1.10.2.4 FLIGHT PLAN FORM

- 1.10.2.4.1 The Flight Plan Form must be completed according to the instructions contained in Doc 4444 ATM 501, Appendix 2.
- 1.10.2.4.2 The following options are REQUIRED by the ATS authority for all flight operating within the BAHRAIN FIR / BAHRAIN UIR:
- 1.10.2.4.2.1 Flight Plan ITEM 8 The second field letter denoting the TYPE OF FLIGHT.
- 1.10.2.4.2.2 Flight Plan ITEM 18 The indicator "EET / " followed by FIR / UIR boundary designators and accumulated elapsed times as follows:
- a) Flight entering the BAHRAIN FIR: The location indicator for the BAHRAIN FIR together with the accumulated estimated time since departure (e.g. EET / OBBB 0345).
- b) Flights departing from the BAHRAIN FIR: All boundary designators together with the corresponding estimated elapsed times to those points (e.g. for a flight from OBBI to EGLL, EET / OEJD 0005, OJAC 0125, OSTT 0145, LCCC 0210, LGGG 0245, LTBB 0300, LYBA 0420, LOVV 0450, EDDU 0510, EBUR 0545, EHAA 0600, EGTT 0615).
- 1.10.2.4.2.3 Flight Plan ITEM 18 The indicator "SEL / " followed by the SELCAL code.
- 1.10.2.4.2.4 Flight Plan ITEM 19 To be completed in full.

1.10.3 CHANGE TO THE SUBMITTED FLIGHT PLAN

All changes to a flight plan submitted for an IFR flight or a controlled VFR flight and significant changes to a flight plan submitted for an uncontrolled VFR flight shall be reported as soon as possible to the appropriate ATS unit.

1.10.3.1 In the event of a delay in departure of 30 minutes or more for a flight for which a flight plan has been submitted, the flight plan shall be amended or a new flight plan shall be submitted after the old plan has been cancelled.

Note 1: If a delay in departure of a controlled flight is not properly reported, the relevant flight plan date may no longer be readily available to the appropriate ATS unit when a clearance is ultimately requested, which will consequently result in extra delay for the flight.

Note 2: If a delay in departure (or cancellation) of an uncontrolled VFR flight is not properly reported, alerting or search and rescue action may be unnecessarily initiated, when the flight fails to arrive at the destination aerodrome within 30 minutes after current ETA.

1.10.3.2 Whenever a flight, for which a flight plan has been submitted, is cancelled, the appropriate ATS unit shall be informed immediately.

Changes to a current flight plan for a controlled flight during flight shall be reported or requested subject to the provisions in Annex 2.3.6.2 (Adherence to flight plan).

Significant changes to a flight plan for an uncontrolled VFR flight include changes in endurance, or total number of persons on board and changes in time estimates of 30 minutes or more.

1.10.3.3 Arrival report (Closing a flight plan)

A report of arrival shall be made at the earliest possible moment after landing to the airport office of the arrival aerodrome by any flight for which a flight plan has been submitted except when the arrival has been acknowledged by the local ATS unit.

After landing at an aerodrome which is not the destination aerodrome (diversionary landing) the local ATS unit shall be specifically informed accordingly.

In the absence of a local ATS unit at the aerodrome of diversionary landing the pilot is responsible for passing the arrival report to the destination aerodrome.

- aircraft identification
- departure aerodrome
- destination aerodrome
- time of arrival

In the case of diversion, insert between "destination aerodrome" an "time of arrival":

the "arrival aerodrome"

INTENTIONALLY BLANK

REPETITVE FLIGHT PLANE LISTING (FOR FLIGHT DATA SUBMISSION)

[. T	Г							 l .	Π	Γ	Г			Γ	Г		
(G) SUPPLEMENTARY (Item 19)	(ô)		REMARKS.														
SERIAL NO.			\dashv														
TE mdd AT:	(P)	AATION OROME ND TAL IATED ID TIME	(item 16)														
DATE yymmdd (G) SUPP AT:	D	DESTINATION AERODROME AND TOTAL ESTIMATED ELAPSED TIME	(iten														
(S)		ROUTE (item 15)	ROUTE	The state of the s													
ORO!			G EVEL														
ERO)			CRUISING SPEED LEVEL														
(C) DEPARTURE AERODROMI				_								_				-	
	Ê	DEPARTURE AERODROME AND TIME	m 13)	_													
		DEPA AERC	jj.														
<u>6</u>	_	7 E	_														
SSEE ((M	Type of AIRCRAFT And Wake Turbulence Category	(item)														
(B) ADDRESSEE (S)	(T)	AIRCRAFT IDENTIFICATI ON (item 7)															
		7	7														
		DAYS OF OPERATION	9 9	\dashv	_							\dashv				_	
	ક્ર	FOPE	4														
		XS OF	9														
		PA	7				Н					_					
	6	VALID	yymmdd														
(A) Operator	€	VALID	yymmdd														
(A) C	(H)	+	1														

Additional Information Required :- BAHRAIN FIR Entry point with EST (UTC).

INTENTIONALLY BLANK

AIP BAHRAIN FIR ENR 1.10-7
17 SEP 15

1.10.4 ADDITIONAL REQUIREMENTS RELATED TO RVSM AIRSPACE

Note: Flights will not be given access to BAHRAIN RVSM airspace when:

- a) No flight plan has been received, or
- b) A flight plan has been received but the required RVSM data has not been included in the flight plan.
- 1.10.4.1 Except as indicated in **ENR 1.10.4.3** flight between FL 290 to FL 410 is for exclusive use of RVSM approved aircraft. Non RVSM certified aircraft shall flight plan accordingly.
- 1.10.4.2 Operators of RVSM certified aircraft shall insert the letter "W" in item 10 of the flight plan regardless of the requested level.
- 1.10.4.3 Acceptance of non RVSM certified State aircraft for flight at RVSM levels is subject to prevailling traffic conditions. RVSM certified aircraft will be offered priority in order to make maximum use of airspace capacity.

Note: Consequently, operators of State aircraft intending to navigate within BAHRAIN FIR / BAHRAIN UIR are advised to dispatch RVSM certified aircraft or flight plan at non - RVSM levels.

- 1.10.4.4 Operators of non RVSM certified State aircraft requesting a flight level within RVSM airspace shall insert the phrase "STS / NONRVSM" in item 18 of the flight plan.
- 1.10.4.5 In addition to the requirements of **ENR 1.10.4.4** operators of non RVSM certified State aircraft requesting to operate in RVSM airspace shall include the letter "M" in item 8 of the flight plan.
- 1.10.4.6 The flight plan for an aircraft intending to operate across or within the lateral limits of RVSM airspace shall include:
- a) The entry point and requested flight level for that portion of the route commencing immediately after the entry point.
- b) The exit point and requested flight level for that portion of the route commencing immediately after the exit point.



AIP BAHRAIN FIR ENR 1.11-1 17 SEP 15

ENR 1.11 ADDRESSING OF FLIGHT PLAN MESSAGES

Flight movement messages relating to traffic into or via BAHRAIN FIR / BAHRAIN UIR shall be addressed as stated below in order to warrant correct relay and delivery.

Note: Flight movement messages in this context comprise flight plan messages, amendment messages relating thereto and flight plan cancellation messages. ICAO ATM - DOC 4444, chapter 11 para. 11.2.1.1.3 refers.

1.11.1 AFTN ADDRESSES

1.11.1.1 Category of flight (IFR, VFR or both)

All Flight Plans and Departures messages for flights operating through or within the BAHRAIN FIR / BAHRAIN UIR must include addressees **OBBBZQZX**.

- 1.11.1.2 All aircraft operators intending to use BAHRAIN INTERNATIONAL airport as a departure aerodrome must include the addressees **OBBIZPZX** in their flight plan.
- 1.11.1.3 BAHRAIN / SAKHIR AIRBASE installed new AFTN addresses necessary for flight planning puropses and other relevant issues as follows: OBKHZTZX for Control Tower, OBKHZPZX for AIS / COMMS and OBKHYFYX for Service Address.



AIP BAHRAIN FIR ENR 1.12-1
17 SEP 15

ENR 1 12 INTERCEPTION OF CIVIL AIRCRAFT

1.12.1 Interception procedures

All unknown aircraft within the airspace over territories and territorial waters of states within the BAHRAIN FIR / BAHRAIN UIR may be intercepted by air defense fighters by day and by night.

1.12.2 Applicability

- 1.12.2.1 The procedures and signals set out in this section apply in the event of an interception over the territory and territorial waters of the Kingdom of Bahrain.
- 1.12.2.2 An aircraft which is intercepted by another aircraft is required immediately to:
- a) follow the instructions given by the intercepting aircraft, interpreting and responding to the signals given under ENR 1.12.3;
- b) notify, if possible, the Air Traffic Services Unit responsible for the airspace in which the aircraft is flying;
- make a general call on the emergency frequency 121.500 MHZ to attempt to establish radio communication with the intercepting aircraft
 or with the intercept control unit, giving the identity and position of the aircraft and the nature of the flight. This call should be repeated on
 243.000 MHZ if necessary and practicable;
- d) if equipped with SSR transponder, select Mode A Code 7700, unless otherwise instructed by the appropriate Air Traffic Services Unit.
- 1.12.2.3 If any instructions received by radio from any sources conflict with those given by the intercepting aircraft by visual signals, the intercepted aircraft is required to request immediate clarification while continuing to comply with the visual instructions given by the intercepting aircraft.
- 1.12.2.4 If any instructions received by radio from any sources conflict with those given by the intercepting aircraft by radio, the intercepted aircraft is required to request immediate clarification while continuing to comply with the radio instructions given by the intercepting aircraft.
- 1.12.2.5 All aircraft shall, at all times, remain well clear from areas being published as prohibited areas, however, if an aircraft was so be compelled to enter a prohibited area due to weather avoidance or otherwise track deviation from the intended route, which would finally take the aircraft into prohibited areas, was observed and such initiative was made by the pilot without obtaining a specific approval from ATC to carry out the maneouvre, then this particular flight may expect an interception by military jets by the ROYAL BAHRAIN AIR FORCE during which full compliance to the instructions issued by the interceptors must be immediately adhered to.
- 1.12.2.6 If radio contact is established during interception but communication in a common language is not possible, attempts shall be made to convey instructions, acknowledgement of instructions and essential information by using the phrases and pronunciations in the following table and transmitting each phrase twice:

Phrases for use by INTERCEPTING aircraft						
Phrase	Pronunciation ¹	Meaning				
CALL SIGN	KOL SA - IN	What is your call sign?				
FOLLOW	FOL - LO	Follow me				
DESCEND	DEE - SEND	Descend for landing				
YOU LAND	YOU LAAND	Land at this aerodrome				
PROCEED	PRO - SEED	You may proceed				
¹ Syllables to be emphasized are printed in bold letters.						

Phrases for use by INTERCEPTED aircraft							
Phrase	Pronunciation ¹	Meaning					
CALL SIGN ²	KOL SA - IN	My call sign is (call sign)					
WILCO	VILL - KO	Understood. Will comply.					
CAN NOT	KANN - NOTT	Unable to comply					
REPEAT	REE - PEET	Repeat your instruction					
AM LOST	AM - LOSST	Position unknown					
MAYDAY	MAYDAY	I am in distress					
HIJACK ³	HI - JACK	I have been hijacked					
LAND (place name)	LAAND (place name)	I request to land at (place name)					

DESCEND	DEE - SEND	I required descent					
¹ Syllables to be emphasized are printed in bold letters.							
² The call sign required to be given is that use aircraft's identification in the flight plan.	² The call sign required to be given is that used in radio telephony communications with air traffic services units and corresponding to the aircraft's identification in the flight plan.						
³ Circumstances may not always permit, nor make desirable, the use of the phrase "HIJACK"							

AIP BAHRAIN FIR

1.12.3 TABLES OF VISUAL SIGNALS FOR USE IN THE EVENT OF INTERCEPTION

1.12.3.1 Signals initiated by INTERCEPTING aircraft and responses by INTERCEPTED aircraft

Series	INTERCEPTING Aircraft Signals	Meaning	INTERCEPTED Aircraft Responds	Meaning
1	DAY or NIGHT - Rocking aircraft and flashing navigational lights at irregular intervals (and landing lights in the case of a helicopter) from a position slightly above and ahead of, and normally to the left of, the intercepted aircraft (or to the right if the intercepted aircraft is a helicopter) and, after acknowledgement, a slow level turn, normally to the left, (or to the right in case of a helicopter) on the desired heading. Note 1: - Meteorological conditions or terrain may require the intercepting aircraft to reverse the positions and direction of turn given above in Series 1. Note 2: - If the intercepted aircraft is not able to keep pace with the intercepting aircraft, the latter is expected to fly a series of racetrack patterns and to rock the aircraft each time it passes the intercepted aircraft.	You have been intercepted. Follow me.	DAY or NIGHT - Rocking aircraft, flashing navigational lights at irregular intervals and following. Note: - Additional action required to be taken by intercepted aircraft is prescribed on ENR 1.12.2.6.	Understood, will comply.
2	DAY or NIGHT - An abrupt breakaway manoeuvre from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of the flight of the intercepted aircraft.	You may proceed.	DAY or NIGHT - Rocking the aircraft.	Understood, will comply.
3	DAY or NIGHT - Lowering landing gear (if fitted), showing steady landing lights and overflying the runway in use or, if the intercepted aircraft is a helicopter, overflying the helicopter landing area. In the case of helicopters, the intercepted helicopter makes a landing approach, coming to hover near to the landing area.	Land at this aerodrome.	DAY or NIGHT - Lowering landing gear, (if fitted), showing steady landing lights and following the intercepting aircraft and, if, after overflying the runway in use or helicopter landing area, landing is considered safe, proceeding to land.	Understood will comply.

AIP BAHRAIN FIR ENR 1.12-3
17 SEP 15

1.12.3.2 Signals initiated by INTERCEPTED aircraft and responses by INTERCEPTING aircraft

Series	INTERCEPTED Aircraft Signals	Meaning	INTERCEPTING Aircraft Responds	Meaning
1	DAY or NIGHT - Raising landing gear (if fitted) and flashing landing lights while passing over runway in use or helicopter landing area at a height exceeding 300 M (1000 FT) but not exceeding 600 M (2000 FT) in the case of a helicopter, at a height exceeding 100 M (350 FT) above the aerodrome level, and continuing to circle the runway in use or helicopter landing area. If unable to flash landing lights, flash any other lights available.	Aerodrome you have designated is inadequate.	DAY or NIGHT - If it is desired that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome, the intercepting aircraft raises its landing gear (if fitted) and uses the Series 1 signals prescribed for intercepting aircraft. If it is decided to release the intercepted aircraft, the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood, follow me. Understood, you may proceed.
2	DAY or NIGHT - Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Cannot comply.	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.
3	DAY or NIGHT - Irregular flashing of all available lights.	In distress.	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.



AIP BAHRAIN FIR ENR 1.13-1 17 SEP 15

ENR 1.13 UNLAWFUL INTERFERENCE

1.13.1 General

The following procedures are intended for use by aircraft when unlawful interference occurs and the aircraft is unable to notify an ATS unit of this fact.

1.13.2 Procedures

- 1.13.2.1 Unless considerations aboard the aircraft dictate otherwise, the pilot in command should attempt to continue flying on the assigned track and the assigned cruising level at least until able to notify an ATS unit or within radar coverage.
- 1.13.2.2 When an aircraft subjected to an act of unlawful interference must depart from its assigned track or its assigned cruising level without being able to make radiotelephony contact with ATS, the pilot in command should, whenever possible:
- a) attempt to broadcast warnings on the VHF emergency frequency and other appropriate frequencies, unless considerations aboard the aircraft dictate otherwise. Other equipment such as on board transponders, data links, etc. should also be used when it is advantageous to do so and circumstances permit; and
- b) Proceed in accordance with applicable special procedures for in flight contingencies, where such procedures have been established and promulgated in Doc 7030 Regional Supplementary Procedures; or
- If no applicable regional procedures have been established, proceed at a level which differs from the cruising levels normally used for IFR flight:
 - 1. 150 M (500 FT) in an area where a vertical separation minimum of 300 M (1000 FT) is applied; or
 - 2. 300 M (1000 FT) in an area where a vertical separation minimum of 600 M (2000 FT) is applied.



AIP BAHRAIN FIR ENR 1.14-1
17 SEP 15

ENR 1.14 AIR TRAFFIC INCIDENTS

1.14.1 Definition of air traffic incidents

- 1.14.1.1 "Air traffic incident" is used to mean a serious occurrence related to the provision of air traffic services, such as:
- a) aircraft proximity (AIRPROX);
- b) serious difficulty resulting in a hazard to aircraft caused, for example, by:
 - 1. faulty procedures
 - 2. non-compliance with procedures, or
 - 3. failure of ground facilities.
- 1.14.1.1.1 Definitions for aircraft proximity and AIRPROX.

Aircraft proximity. A situation in which, in the opinion of the pilot or the air traffic services personnel, the distance between aircraft, as well as their relative positions and speed, have been such that the safety of the aircraft involved may have been compromised. An aircraft proximity is classified as follows:

Risk of collision. The risk classification of aircraft proximity in which serious risk of collision has existed.

Safety not assured. The risk classification of aircraft proximity in which the safety of the aircraft may have been compromised.

No risk of collision. The risk classification of aircraft proximity in which no risk of collision has existed.

Risk not determined. The risk classification of aircraft proximity in which insufficient information was available to determine the risk involved, or inconclusive or conflicting evidence precluded such determination.

AIRPROX. The code word used in an air traffic incident report to designate aircraft proximity.

1.14.1.2 Air traffic incidents are designated and identified in reports as follows:

Type	Designation
Air traffic incident	Incident
as a) above	AIRPROX (Aircraft proximity)
as b) 1) and 2) above	Procedure
as b) 3) above	Facility

1.14.2 Use of the Air Traffic Incident Report Form (See model below)

The Air Traffic Incident Report Form is intended for use:

a) by a pilot for filing a report on an air traffic incident after arrival or to confirm a report made initially by radio during flight.

Note: The form, if available on board, may also be of use in providing a pattern for making the initial report in flight.

b) by an ATS unit for recording an air traffic incident report received by radio telephone or teleprinter.

Note: The form may be used as the format for the text of a message to be transmitted over the AFS network.

1.14.3 Reporting procedures (including in-flight procedures)

- 1.14.3.1 The following are the procedures to be followed by a pilot who is or has been involved in an incident:
- a) during flight, use the appropriate air / ground frequency for reporting an incident of major significance, particularly if it involves other aircraft, so as to permit the facts to be ascertained immediately;
- b) as promptly as possible after landing, submit a completed Air Traffic Incident Report Form;
 - 1. for confirming a report of an incident made initially as in a) above, or for making the initial report on such an incident if it had not been possible to report it by radio;
 - 2. for reporting an incident which did not require immediate notification at the time of occurrence.
- 1.14.3.2 An initial report made by radio should contain the following information:
- a) aircraft identification;
- b) type of incident, e.g. aircraft proximity;
- c) the incident; 1. a) and b); 2. a), b), c), d), n); 3. a), b), c), i); 4. a), b);
- d) miscellaneous: 1. e).
- 1.14.3.3 The confirmatory report on an incident of major significance initially reported by radio or the initial report on any other incident should be submitted to The Aviation Safety Board, P.O. Box 586, Kingdom of Bahrain or to the ATS Reporting Office of the aerodrome of first

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

ENR 1.14-2 AIP BAHRAIN FIR 17 SEP 15

landing for submission to The Aviation Safety Board. The pilot should complete the Air Traffic Incident Report Form, supplementing the details of the initial reports as necessary.

Note: Where there is no ATS Reporting Office, the report may be submitted to another ATS unit.

1.14.3.4 The pilot should complete the Air Traffic Incident Report Form (see **ENR 1.14.4.2** - ICAO model Air Traffic Incident Report Form, supplementing the details of the initial reports as necessary.

1.14.4 Purpose of reporting and handling of the form

1.14.4.1 The purpose of the reporting of aircraft proximity incidents and their investigation is to promote the safety of aircraft. The degree of risk involved in an aircraft proximity incident should be determined in the incident investigation and classified as "risk of collision", "safety not assured", "no risk of collision" or "risk not determined".

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 1.14-3
17 SEP 15

1.14.4.2 The purpose of the form is to provide investigatory authorities with as complete information on an air traffic incident as possible and to enable them to report back, with the least possible delay to the pilot or operator concerned, the result of the investigation of the incident and, if appropriate, the remedial action taken.

	AIR TRAFFIC INCIDENT REPORT FORM								
For	use wh	nen submitting and receiving reports on air traffi	c in	cide	ents. In an initial report by radio, shaded	d ite	ms	should be included.	
A -	- AIRC	RAFT IDENTIFICATION	В	B — TYPE OF INCIDENT					
			AI	RPI	ROX / PROCEDURE / FACILITY*				
c –	C — THE INCIDENT								
1.	Gene	ral							
	a)	Date / time of incident UTC							
	b)	Position							
2.	Own	aircraft							
	a)	Heading and route							
	b)	True airspeed			measured in () kt () k	m/h			
	c)	Level and altimeter setting				,			
	d)	Aircraft climbing or descending							
		() Level flight	()	Climbing	()	Descending	
	e)	Aircraft bank angle							
		() Wings level	()	Slight bank	()	Moderate bank	
		() Steep bank	()	Inverted	()	Unknown	
	f)	Aircraft direction of bank							
		() Left	()	Right	()	Unknown	
	g)	Restrictions to visibility (select as many as rec	•						
		() Sunglare	(Windscreen pillar	()	Dirty windscreen	
		() Other cockpit structure	(•	None				
	h)	Use of aircraft lighting (select as many as req			Ctuals a limbte	,	`	Cabin limbto	
		Navigation lights Red anti-collision lights	(Strobe lights Landing / taxi lights	•)	Cabin lights Logo (tail fin) lights	
		Red anti-collision lights Other	(None	()	Logo (tall lill) lights	
	i)	Traffic avoidance advice issued by ATS	(,	None				
	.,	() Yes, based on radar	()	Yes, based on visual sighting	()	Yes, based on other information	
		() No	`	,	,	`	,	,	
	j)	Traffic information issued							
	•	() Yes, based on radar	()	Yes, based on visual sighting	()	Yes, based on other information	
		() No							
	k)	Airborne collision avoidance system — ACAS							
		() Not carried	()	Туре	()	Traffic advisory issued	
		() Resolution advisory issued	()	Traffic advisory or resolution advisory	not	issı	ued	
	I)	Radar identification							
		() No radar available	()	Radar identification	()	No radar identification	
	m)	Other aircraft sighted							
		() Yes	()	No	()	Wrong aircraft sighted	

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

^{*}Delete as appropriate

	n)	Avoiding action taken						
		() Yes	()	No			
	o)	Type of flight plan	IF	R/	VFR / none*			
3.	Othe	r aircraft						
	a)	Type and call sign / registration (if known)						
	•							
	b)	If a) above not known, describe below	,	,	Art -	,	,	
		() High wing	()	Mid wing	()	Low wing
		() Rotorcraft	,	,	0	,	,	2
		() 1 engine)	2 engines More than 4 engines	()	3 engines
		() 4 engines	()	More than 4 engines			
	Marki	ng, colour or other available details						
	c)	Aircraft climbing or descending						
	٥,	() Level flight	()	Climbing	()	Descending
		() Unknown	`	,		`	,	
	d)	Aircraft bank angle						
	,	() Wings level	()	Slight bank	()	Moderate bank
		() Steep bank	()	Inverted	()	Unknown
	e)	Aircraft direction of bank						
		() Left	()	Right	()	Unknown
	f)	Lights displayed						
		() Navigation lights	()	Strobe lights	()	Cabin lights
		() Red anti-collision lights	()	Landing / taxi lights	()	Logo (tail fin) lights
		() Other	()	None	()	Unknown
	g)	Traffic avoidance advice issued by ATS						
		() Yes, based on radar	()	Yes, based on visual sighting	()	Yes, based on other information
		() No	()	Unknown			
	h)	Traffic information issued						
		() Yes, based on radar	()	Yes, based on visual sighting	()	Yes, based on other information
		() No	()	Unknown			
	i)	Avoiding action taken						
		() Yes	()	No	()	Unknown

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

^{*}Delete as appropriate

AIP BAHRAIN FIR ENR 1.14-5
17 SEP 15

4.	Dista	nce				
	a)	Closest horizontal distance				
	b)	Closest vertical distance				
5.	_	weather conditions				
	a)	IMC / VMC*				
	b)	Above / below* clouds / fog / haze or between layers*				
	c)	Distance vertically from cloud m / ft* below m / ft* above				
	d)	In cloud / rain / snow / sleet / fog / haze*				
	e)	Flying into / out of* sun				
	f)	Flight visibility m / km*				
6.	Anv o	other information considered important by the pilot-in-command				
	,	,				
D —	- MISCI	ELLANEOUS				
1.	Inforn	nation regarding reporting aircraft				
	a)	Aircraft registration				
	b)	Aircraft type				
	c)	Operator				
	d)	Aerodrome of departure				
	-/	Aerodrome of first landing				
	e)	destination				
	f)	Reported by radio or other means to (name of ATS unit) at time UTC				
	g)	Date / time / place of completion of form				
2.		ion, address and signature of person submitting report				
	a)	Function				
	b)	Address				
	c)	Signature				
	d)	Telephone number				
3.	Funct	ion and signature of person receiving report				
٥.	i unct					
	a)	Function b) Signature				
1						

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

^{*}Delete as appropriate

	a)	Report received via AFTN / radio / telephone / other (specify)	*
	b)	Report received by	(name of ATS unit)
		ils of ATS action rance, incident seen (radar/visually, warning given, result of loca	I enquiry, etc.)
		_	
		_	
		_	
		_	
		DIAGRAMS	OF AIRPROX
N.	lork r		on the left and in elevation on the right, assuming YOU
a	re at	the centre of each diagram. Include first sighti	ng and nassing distance
			ng and padding dictarioo.
			ing and passing distance.
		→ Hundreds of metres	Hundreds of metres
	10	3 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
	10 9 8	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 270 270 270 270 270 270 270 270 2
	10 9 8 7 6 5	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 270 270 270 270 270 270 270 270 2
	10 9 8 7 6 5 4 3	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 240 240 240 240 240 240 240 240 240 24
\	10 9 8 7 6 5 4 3 2	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 270 280 6 7 7 8 9 10 11 12 13 14 180 180 180 180 180 180 180 1
	10 9 8 7 6 5 4 3 2 1 0	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 10 10 10 10 10 10 10 10 10 10 10 10 1
	10 9 8 7 6 5 4 3 2 1	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 240 240 240 240 241 3 180 30 60 60 1 1 1 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3
	10 9 8 7 6 5 4 3 2 1 0 1 1 2 3	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 270 280 6 5 7 7 8 9 10 11 12 13 14 180 180 180 180 180 180 180 1
	10 9 8 7 6 5 4 4 3 2 1 0 1 1 2 3 3 4 5 6 6 7 7 8	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 270 240 240 240 240 240 240 30 60 90 1 10 1 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3
	10 9 8 7 6 5 4 3 2 1 1 0 1 2 3 3 4 5 6 7	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 10 10 10 10 10 10 10 10 10 10 10 10 1
	10 9 8 7 6 5 4 4 3 2 1 0 1 1 2 3 3 4 5 6 6 7 7 8	312111098765432101234567891011121314	Hundreds of metres 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 10 300 270 240 240 240 241 3 180 4 1 10 1 10 1 10 1 10 1 10 1 10 1 10 1

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

^{*}Delete as appropriate

	Instructions for completion of the Air Traffic Incident Report Form							
Item								
Α	Aircraft identification of the aircraft filing the report.							
В	An AIRPROX report should be filed immediately by radio.							
C1	Date / time UTC and position in bearing and distance from a navigation aid or in LAT / LONG.							
C2	Information regarding aircraft filing the report, tick as necessary.							
C2 c)	E.g. FL 350 / 1013 HPA or 2500 FT / QNH 1 007 HPA or 1200 FT / QFE 998 HPA.							
C3	Information regarding the other aircraft involved.							
C4	Passing distance - state units used.							
C6	Attach additional papers as required. The diagrams may be used to show aircraft's positions.							
D1 f)	State name of ATS unit and date / time in UTC.							

Include details of ATS unit such as service provided, radiotelephony frequency, SSR Codes assigned and altimeter setting. Use diagram to show the aircraft's position and attach addition-

D1 g)

E2

Date and time in UTC.

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15



ENR 2. AIR TRAFFIC SERVICES AIRSPACE ENR 2.1 FIR, UIR, TMA AND CTA

		TIMA AND OTA		
Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use	Frequency/ Purpose	Remarks
		Hours of service		
1	2	3	4	5
BAHRAIN FIR	BAHRAIN ACC			
DARKAIN FIK	BARRAIN ACC			
281500.00N 0485200.00E -				
284400.00N 0494000.00E -				
270500.00N 0505500.00E -				
265500.00N 0511000.00E -				
260400.00N 0535700.00E -				
254900.00N 0530600.00E - 240300.00N 0514700.00E -				
235816.00N 0514308.00E -				
240724.00N 0513526.00E -				
241458.00N 0513526.00E -				
244247.00N 0513422.00E -				
243817.00N 0512608.00E -				
243747.00N 0512421.00E - 243731.00N 0512406.00E -				
243731.00N 0512406.00E - 243549.00N 0512449.00E -				
243116.00N 0512154.00E -				
242907.00N 0511849.00E -				
242816.00N 0510555.00E -				
243000.00N 0510000.00E -				
243243.00N 0505544.00E -				
244024.00N 0505134.00E - 244440.00N 0504842.00E -				
244543.00N 0504828.00E -				
244653.00N 0504828.00E -				
244927.00N 0504804.00E -				
245244.00N 0504738.00E -				
245534.00N 0504543.00E -				
245631.00N 0504438.00E - 245927.00N 0504329.00E -				
250243.00N 0504329.00E -				
250516.00N 0504101.00E -				
250758.00N 0503951.00E -				
251153.00N 0503940.00E -				
251355.00N 0503918.00E -				
251522.00N 0503848.00E - 251849.00N 0503855.00E -				
252144.00N 0503818.00E -				
252336.00N 0503741.00E -				
252510.00N 0503716.00E -				
252828.00N 0503653.00E -				
253111.00N 0503544.00E -				
253543.98N 0503147.55E - 254057.00N 0502607.75E -				
254227.58N 0502503.18E -				
254908.47N 0502200.71E -				
255301.53N 0501806.62E -				
255709.25N 0501735.44E -				
260450.10N 0501610.65E -				
261018.28N 0501852.34E -				
261514.69N 0501907.80E - 262217.45N 0502026.57E -				
262423.93N 0502218.51E -				
263148.00N 0502315.00E -				
263420.00N 0502759.00E -				
265234.00N 0500855.00E -				
275000.00N 0490800.00E				
Below FL 150 / SFC except CTR / TMA				
Class of Airspace C at and above 4500 FT and				
below FL150				
Class of Airspace G below 4500 FT				
·				•

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

	.,		0 !! !	- <i>,</i>	
	Name	Unit providing	Call sign	Frequency/	Remarks
	Lateral limits	service	Languages	Purpose	
	Vertical limits Class of airspace		Area and conditions of		
	Class of airspace		use		
			Hours of service		
	1	2	3	4	5
	NORTH LOW SECTOR	BAHRAIN ACC	BAHRAIN	126.700 MHZ	SFC to below FL325
			NORTH LOW		
	271557.30N 0504650.00E -		English		
	270757.00N 0503655.32E -		1104		
	270838.05N 0495202.00E -		H24		
	275000.00N 0490800.00E - 281500.00N 0485200.00E -				
	284400.00N 0494000.00E -				
	271557.30N 0504650.00E				
_					
I	NORTH HIGH SECTOR	BAHRAIN ACC	BAHRAIN	123.100 MHZ	FL325 and above
			NORTH HIGH		
	271557.30N 0504650.00E -		English		
	270757.00N 0503655.32E -		1104		
	270838.05N 0495202.00E -		H24		
	275000.00N 0490800.00E - 281500.00N 0485200.00E -				
	281500.00N 0485200.00E - 284400.00N 0494000.00E -				
	271557.30N 0504650.00E				
	27 1337 3011 0304030.00E				
	CENTRAL LOW SECTOR	BAHRAIN ACC	BAHRAIN CENTRAL LOW	124.300 MHZ	FL335 and below
	271557.30N 0504650.00E -		English		
	270500.00N 0505500.00E -		g		
	265810.49N 0510515.00E -		H24		
	264804.00N 0510117.00E -				
	261515.06N 0511652.11E -				
	255856.00N 0515024.00E -				
	252055.00N 0514100.00E -				
	253111.00N 0503544.00E -				
	253544.00N 0503147.55E -				
	254057.00N 0502608.00E -				
	254227.58N 0502503.18E -				
	254908.47N 0502201.00E -				
	255301.53N 0501807.00E -				
	263148.00N 0502315.00E -				
	263420.00N 0502759.00E -				
	265234.00N 0500855.00E -				
	270838.05N 0495202.00E -				
	270757.00N 0503655.32E -				
	271557.30N 0504650.00E				
	255709.25N 0501735.44E - 260450.10N 0501611.00E - 261018.28N 0501852.34E - 261515.00N 0501908.00E - 262217.45N 0502026.57E - 262424.00N 0502218.51E - 263148.00N 0502315.00E - 263420.00N 0502759.00E - 265234.00N 0500855.00E - 270838.05N 0495202.00E - 270757.00N 0503655.32E -				

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
CENTRAL HIGH SECTOR 271557.30N 0504650.00E - 270500.00N 0505500.00E - 265810.49N 0510515.00E - 264804.00N 0510117.00E - 261515.06N 0511652.11E - 255856.00N 0514100.00E - 253111.00N 0503544.00E - 253544.00N 0503147.55E - 254057.00N 0502608.00E - 254227.58N 0502503.18E - 254908.47N 0502201.00E - 255301.53N 0501807.00E - 255709.25N 0501735.44E - 260450.10N 0501611.00E - 26118.28N 0501852.34E - 261515.00N 0501908.00E - 262217.45N 0502026.57E - 262424.00N 0502218.51E - 263148.00N 0502315.00E - 263242.00N 0500855.00E - 270838.05N 0495202.00E - 271557.30N 0504650.00E	BAHRAIN ACC	BAHRAIN CENTRAL HIGH English H24	127.525 MHZ	FL335 and above
265810.49N 0510515.00E - 265500.00N 0511000.00E - 260400.00N 0535700.00E - 254900.00N 0530600.00E - 253815.20N 0525751.54E - 255540.00N 0522010.29E - 255856.00N 0515024.18E - 261515.06N 0511652.11E - 264804.00N 0510117.00E - 265810.49N 0510515.00E	BAHRAIN ACC	BAHRAIN EAST HIGH English H24	132.125 MHZ	East High is defined as a portion of the East Sector above FL295, north of the line: 265811N 0510515E, 264804N 0510117E, 261517N 0511659E, 255856N 0515024E, 255540N 0522010E, 253815N 0525752E,

CIVIL AVIATION AFFAIRS AIRAC AMDT 12/16

	Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
	1	2	3	4	5
240300.00N 235816.00N 240724.00N 241458.00N 244247.00N 243817.00N 243747.00N 243747.00N 2437416.00N 24316.00N 242907.00N 242816.00N 243000.00N 243243.00N 244024.00N 244543.00N 244543.00N 244543.00N 245244.00N 245244.00N 245244.00N 245244.00N 245240N 245534.00N 250243.00N 250255.00N		BAHRAIN ACC	BAHRAIN EAST LOW English H24	4 125.700 MHZ	5 Except Portion Underline Esat High:- 265811N 0510515E, 264804N 0510117E, 261517N 0511659E, 255856N 0515024E, 255540N 0522010E, 253815N 0525752E, Below FL295
	0522010.29E - 0525751.00E				

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
BAHRAIN UIR	BAHRAIN ACC			RVSM rules apply between
281500.00N 0485200.00E - 284400.00N 0494000.00E - 270500.00N 0505500.00E - 265500.00N 0511000.00E - 266500.00N 0535700.00E - 254900.00N 053600.00E - 240300.00N 0514700.00E - 235816.00N 0514308.00E - 240724.00N 0513526.00E - 241458.00N 0513526.00E - 244371.00N 051242.00E - 24377.00N 0512421.00E - 243731.00N 0512449.00E - 243731.00N 0512449.00E - 243549.00N 0511849.00E - 242907.00N 0511849.00E - 242907.00N 0511849.00E - 243243.00N 0505544.00E - 24440.00N 0505134.00E - 24440.00N 0504828.00E - 244463.00N 0504828.00E - 244534.00N 0504828.00E - 245244.00N 0504828.00E - 245244.00N 0504804.00E - 245534.00N 0504804.00E - 245534.00N 050450.0E - 245534.00N 050450.0E - 245631.00N 050450.0E - 245631.00N 050450.0E - 245631.00N 0504804.00E - 2455244.00N 0504804.00E - 245534.00N 0504804.00E - 2455244.00N 0504804.00E - 245534.00N 0504804.00E - 245534.00N 0504804.00E - 245534.00N 0504804.00E - 245631.00N 0504804.00E - 245631.00N 0504804.00E - 245631.00N 0504543.00E - 245631.00N 0504543.00E - 250758.00N 0503951.00E - 250758.00N 0503951.00E - 251153.00N 0503940.00E - 251152.00N 0503981.00E - 252140.00N 0503848.00E - 252144.00N 0503851.00E - 252336.00N 0503941.00E - 252336.00N 0503951.00E - 252336.00N 0503941.00E - 252336.00N 0503951.00E - 252427.58N 0502503.18E - 254057.00N 0503653.00E - 2534398N 0503147.55E - 254227.58N 0502503.18E - 2544050.10N 0501875.44 - 260450.10N 0501875.44 - 260450.10N 0503716.00E - 252336.00N 0503716.00E - 252336.00N 0503716.00E - 252427.58N 0502503.18E - 264050.10N 0501852.34E - 261018.28N 0501852.34E - 261514.69N 050218.51E - 263420.00N 050220.71E - 263420.00N 050220.71E - 263420.00N 050220.71E - 263420.00N 0502200.71E - 263420.00N 0502200.71E - 263420.00N 0502503.18E - 264050.10N 0501875.00E - 263420.00N 050200.71E				FL 290 - FL 410 inclusive ALL AIRCRAFT INBOUND TO OBBB FIR FROM OIIX FIR ARE REQUIRED TO CONTACT OBBB ATC FIVE MINUTES BEFORE FIR BOUNDARY ESTIMATE. KUVER AT AND ABOVE FL330 CONTACT FREQ 123.100 MHZ. KUVER AT AND BELOW FL320 CONTACT FREQ 126.700 MHZ, ALSER FL240 AND BELOW CONTACT FREQ 126.700 MHZ, ALSER FL250 UP TO FL330 CONTACT FREQ 124.300 MHZ. ALSER FL340 AND ABOVE CONTACT 127.525 MHZ. MIDSI FL290 AND BELOW CONTACT FREQ 132.850 MHZ. MIDSI FL310 AND ABOVE CONTACT FREQ 132.125 MHZ.

CIVIL AVIATION AFFAIRS AIRAC AMDT 12/16

	Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
	1	2	3	4	5
	NORTH LOW SECTOR 271557.30N 0504650.00E - 270757.00N 0503655.32E - 270838.05N 0495202.00E - 275000.00N 0490800.00E - 281500.00N 0485200.00E - 284400.00N 0494000.00E - 271557.30N 0504650.00E	BAHRAIN ACC	BAHRAIN NORTH LOW English H24	126.700 MHZ	SFC to below FL325
1	NORTH HIGH SECTOR 271557.30N 0504650.00E - 270757.00N 0503655.32E - 270838.05N 0495202.00E - 275000.00N 0490800.00E - 281500.00N 0485200.00E - 284400.00N 0494000.00E - 271557.30N 0504650.00E	BAHRAIN ACC	BAHRAIN NORTH HIGH English H24	123.100 MHZ	FL325 and above
	CENTRAL HIGH SECTOR 271557.30N 0504650.00E - 270500.00N 0505500.00E - 265810.49N 0510515.00E - 264804.00N 0510117.00E - 261515.06N 0511652.11E - 255856.00N 0515024.00E - 252055.00N 0514100.00E - 253111.00N 0503544.00E - 253544.00N 0503147.55E - 254057.00N 0502608.00E - 254227.58N 0502503.18E - 254908.47N 0502201.00E - 255301.53N 0501807.00E - 255709.25N 0501735.44E - 260450.10N 0501611.00E - 261018.28N 0501852.34E - 261515.00N 0501908.00E - 262217.45N 0502205.57E - 262424.00N 0502218.51E - 263148.00N 0502315.00E - 263420.00N 0500855.00E - 270838.05N 0495202.00E - 271557.30N 0504650.00E	BAHRAIN ACC	BAHRAIN CENTRAL HIGH English H24	127.525 MHZ	FL335 and above

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

c	Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
	1	2	3	4	5
ENTRAL LOV	W SECTOR	BAHRAIN ACC	BAHRAIN CENTRAL LOW	124.300 MHZ	FL335 and below
71557.30N 0	0504650.00E -		English		
70500.00N 0	0505500.00E -				
265810.49N 0	0510515.00E -		H24		
264804.00N 0	0510117.00E -				
61515.06N 0	0511652.11E -				
255856.00N 0	0515024.00E -				
252055.00N 0	0514100.00E -				
253111.00N 0)503544.00E -				
253544.00N 0)503147.55E -				
254057.00N 0)502608.00E -				
254227.58N 0)502503.18E -				
254908.47N 0)502201.00E -				
255301.53N 0	0501807.00E -				
255709.25N 0)501735.44E -				
260450.10N 0	0501611.00E -				
261018.28N 0)501852.34E -				
261515.00N 0	0501908.00E -				
262217.45N 0)502026.57E -				
262424.00N 0)502218.51E -				
263148.00N 0	0502315.00E -				
263420.00N 0	0502759.00E -				
	0500855.00E -				
	0495202.00E -				
270757.00N 0					
271557.30N 0	0504650.00E				
AST HIGH SE	ECTOR	BAHRAIN ACC	BAHRAIN EAST HIGH	132.125 MHZ	East High is defined as a portion of the East Sector above
65810 49N n	0510515 00F -		_		
			2.191011		
			H24		I ***
					I
					· · · · · · · · · · · · · · · · · · ·
	0522010.29E -				· · · · · · · · · · · · · · · · · · ·
					I
	0510117.00E -				
	0510515.00E				
260400.00N 0 254900.00N 0 253815.20N 0 255540.00N 0 255856.00N 0 261515.06N 0 264804.00N 0	0511000.00E - 0535700.00E - 0530600.00E - 0525751.54E - 0522010.29E - 0515024.18E - 0511652.11E - 0510117.00E -		HIGH English H24		tion of the East Sector at FL295, north of the line 265811N 0510515E, 264804N 0510117E, 261517N 0511659E, 255856N 0515024E, 255540N 0522010E, 253815N 0525752E,

CIVIL AVIATION AFFAIRS AIRAC AMDT 12/16

ENR 2.1-8 10 NOV 16

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
EAST LOW SECTOR 253815.20N 0525751.54E - 240300.00N 0514700.00E - 235816.00N 0514308.00E - 240724.00N 0513526.00E - 241458.00N 0513526.00E - 244247.00N 0513422.00E - 243317.00N 0512608.00E - 243747.00N 0512421.00E - 243731.00N 0512440.00E - 243731.00N 0512449.00E - 242907.00N 0511849.00E - 242907.00N 0511849.00E - 242816.00N 0510555.00E - 243000.00N 0510000.00E - 243243.00N 0505544.00E - 244024.00N 0505544.00E - 24440.00N 0505134.00E - 2444053.00N 0504828.00E - 24453.00N 0504828.00E - 244534.00N 0504828.00E - 2445244.00N 050438.00E - 245534.00N 0504438.00E - 245534.00N 0504438.00E - 245534.00N 0504438.00E - 245021.00N 0504329.00E - 250243.00N 0504329.00E - 250243.00N 0503951.00E - 251153.00N 0503951.00E - 251153.00N 0503940.00E - 2511535.00N 0503940.00E - 251355.00N 0503940.00E - 251355.00N 0503941.00E - 252144.00N 0503818.00E - 252144.00N 0503818.00E - 252144.00N 0503716.00E - 2522510.00N 0503716.00E - 2525288.00N 0503653.00E - 25255500N 0510000E - 255856.00N 0515024.00E - 2555540.00N 0522010.29E - 253815.00N 0525751.00E	BAHRAIN ACC	BAHRAIN EAST LOW English H24	125.700 MHZ	Except Portion Underline East High: 265811N 0510515E, 264804N 0510117E, 261517N 0511659E, 255856N 0515024E, 255540N 0522010E, 253815N 0525752E, Below FL295

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
## BAHRAIN TMA 265644.00N	BAHRAIN APP	BAHRAIN APPROACH English H24	127.850 MHZ 119.100 MHZ 234.950 MHZ Alternate frequency	ALL FLIGHTS OPERATING WI OBBB FIR ARE REQUESTED TO ADHERE TO THE FOLLOWING:- THE WORD (HEAVY) OR (SUPER) SHALL BE USED IN ALL COMMUNICATION CALLS BETWEEN SUCH AIRCRAFT AND BAHRAIN APPROCACH OR BAHRAIN TOWER.
DOHA TMA 261703.00N 0510442.00E - 252722.11N 0524938.29E - 244749.83N 0522003.45E - 244249.43N 0514206.47E - 243855.53N 0513851.31E - 243012.49N 0513647.35E - 242536.38N 0513459.98E - 242523.02N 0505905.53E - 244500.00N 0504900.00E - 251546.16N 0503852.56E - 253954.00N 0505018.00E - 261703.00N 0510442.00E FL245 4500 FT Class of Airspace: Class A - FL150 and above, Class C - below FL150.	DOHA APP	DOHA RADAR (English) H24	121.100 MHZ TMA	Refer to Qatar AIP.

CIVIL AVIATION AFFAIRS AIRAC AMDT 12/16

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
BAHRAIN CTA	BAHRAIN ACC			For Call sign and frequency see Sector description.
280846.00N 0495943.00E - 265633.73N 0510044.40E - 262925.09N 0522833.36E - 254933.66N 0520316.62E - 261706.56N 0510440.74E - 253643.00N 0504847.00E - 251546.00N 0503852.00E - 251849.00N 0503855.00E - 252144.00N 0503818.00E - 252336.00N 0503741.00E - 252336.00N 0503741.00E - 252828.00N 0503653.00E - 253111.00N 0503544.00E - 253543.98N 0503147.55E - 254057.00N 0502503.18E -				
254908.47N 0502200.71E - 255301.53N 0501806.62E - 255709.25N 0501735.44E - 260450.10N 0501610.65E - 261018.28N 0501852.34E - 261514.69N 0501907.80E - 262217.45N 0502026.57E - 262423.93N 0502218.51E - 263148.00N 0502315.00E - 263420.00N 0502759.00E - 265234.00N 0500855.00E - 275000.00N 0490800.00E FL 460 FL 150 Class of airspace: A				

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 2.2-1
17 AUG 17

ENR 2.2 OTHER REGULATED AIRSPACE

2.2.1 KINGDOM OF BAHRAIN

- 2.2.1.1 See AD 2.24 chart list. Also see **AD 1.1** for civil use and AD 2.17 for ATS airspace.
- 2.2.1.2 RBAF authorities are responsible for Air Traffic Services within Bahrain territorial airspace East of Jeddah FIR, West of Doha TMA and south of line: 255405N 0505543E 260457N 0503655E 260457N 0501615E.

This line is commonly referred to as referred to as "OBSOBI" line.

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17



AIP BAHRAIN FIR ENR 3.1-1
26 APR 18

ENR 3. ATS ROUTES

ENR 3.1 LOWER ATS ROUTES

Route designator (RNAV type) Name of significant points	Track MAG (GEO) VOR RDL	Upper limit Lower limit	Lateral	Direction of cruising levels	Remarks Controlling unit channel Logon address
Coordinates	DIST	Airspace classification	(NM)		Logon address
	(NM) (COP)	Minimum flight		Odd Even	
		altitude			
1	2	3	4	5	6
A453 (RNAV 1)					OIIX / OBBB FIR BDRY; TFC entering OBBB FIR to call on second box BAHRAIN EAST on freq 126.700 MHZ at 50 NM prior to MIDSI; Only avbl for TFC landing OBBI / OBBS / OBKH / OEDF / OEDR and for TFC routing SOGAT - BAH - KFA
MIDSI (FIR BDRY)					
264142N 0515442E	226°	FL 145	1		
ВОТОВ	12.0 NM	4 500 FT MSL		↓	
263350N 0514505E	225°	Class C			
SOLOB	17.0 NM				BAHRAIN ACC EAST HIGH
262241N 0513132E	260° 8.0 NM	FL 145 Class C			1
TOBLI		Class C			TMA BDRY
262134N 0512301E	260° 8.0 NM				
SOGAT					
262029N 0511443E	259° 16.0 NM				BAHRAIN ACC CENTRAL
ASTAD					
261812N 0505646E	259° 16.0 NM				
BAHRAIN DVORDME (BAH)					
261551N 0503856E	338° 158°			↓	
ELOSO	9.0 NM				
262409N 0503551E	338° 158°				
DESBU	9.0 NM				
263240N 0503241E	10.0 NM	FL 145			
EGMOR		Class A			
264211N 0502907E	315° 135°	FL 145 Class C			
LOTOR	9.0 NM				
264854N 0502200E	315°				
RAMSI	135° 19.0 NM			1	
270249N 0500714E	308°	FL 145	1	i i	
ORNAK	40.0 NM	4 500 FT MSL		↓	
272854N 0493248E	319° 30.0 NM	Class C			Transfer of Control OBBB / OKAC ACC; BAH-
SOLEM					RAIN ACC NORTH
275229N 0491136E	328° 28.0 NM				
△ KUMBO (FIR BDRY)	ZU.U INIVI				
△ 281705N 0485526E					OBBB / OKAC FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
B415					Ref to QATAR AIP.
(RNAV 1)					DOHA APP.
DOHA/HAMAD INTL DVORDME (DOH)					
251500N 0513635E	105° 285°	FL 145 4 500 FT MSL	1	\downarrow	
KUPSA	33.6 NM	Class C			
250445N 0521151E	103° 283°			1	
BUNDU (FIR BDRY)	16.5 NM				
250024N 0522924E					OBBB / OMAE FIR BDRY

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
B416 (RNAV 1) AMBIK (FIR BDRY)					OKAC / OBBB FIR BDRY TFC ENTERING OBBB FIR VIA POSI- TION AMBIK SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAH- RAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMAT- ING THIS POSITION.
283222N 0492025E	118° 298°	FL 145 4 500 FT MSL	1	\downarrow	BAHRAIN ACC NORTH
TESSO 282852N 0492723E GEVAL 282101N 0494300E	7.0 NM 118° 298° 16.0 NM 118°	Class C			
GOGMA 281421N 0495612E KUVER (FIR BDRY)	298° 13.0 NM 118° 298° 10.0 NM			1	TFC ENTERING OBBB FIR VIA POSI- TION KUVER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTI- MATING POSITION KUVER.
280924N 0500600E					OBBB / OIII FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction cruising levels	Controlling unit channel Logon address
1	2	3	4	5	6
B419 (RNAV 1) RAMSI 270249N 0500714E	199°	FL 145	1		BAHRAIN ACC CENTRAL
METLA (FIR BDRY) 265645N 0500433E	7.0 NM	4 500 FT MSL Class C		^ `	OBBB / OEJD FIR BDRY

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

	Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit channel Logon address
	1	2	3	4	5	6
B4 (RI	57 NAV 1) EMISA					
	254658N 0514207E	296° 116°	FL 145 4 500 FT GND	1	1	BAHRAIN ACC CENTRAL Ref to QATAR AIP.
١.	PATOM	24.0 NM	Class C			DOHA APP.
	255821N 0511836E	296° 116°				
	DENVO	14.0 NM				
	260452N 0510509E	112° 292°	FL 145 Class C			
	BAHRAIN DVORDME (BAH)	26.0 NM				
	261551N 0503856E	096° 276°			 	
	NARMI (FIR BDRY)	17.0 NM				
	261802N 0501939E					OBBB / OEJD FIR BDRY; Transfer Of Control OBBB / OEJD / OERK ACC

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direct cruis lev	sing els Even	Controlling unit channel Logon address
1	2	3	4	5	i	6
G663 (RNAV 1) ALSER (FIR BDRY)						OliX / OBBB FIR BDRY TFC entering OBBB FIR to call on second box BAHRAIN ACC at 50 NM prior to ALSER
271100N 0504900E	225° 3.0 NM	FL 145 4 500 FT MSL Class C	1		\downarrow	TFC ENTERING OBBB FIR VIA POSITION ALSER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING POSITION ALSER.
VEDOR 270855N 0504630E GETAL 270410N 0504040E	226° 7.0 NM 226°					BAHRAIN ACC CENTRAL
▲ ITIXA 270142N 0503736E KOBOK	4.0 NM 226° 5.0 NM					
265839N 0503349E TOLMO 265504N 0502927E	226° 5.0 NM 224°	FL 145 Class C				
RAKAK 265221N 0502618E LOTOR	4.0 NM 226° 5.0 NM 234°					Transfer of Control OBBB / OERK / OEJD ACC; TMA BDRY
264854N 0502200E ULADA (FIR BDRY) 264527N 0501624E	6.0 NM					OBBB / OEJD FIR BDRY

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 3.1-7 2 MAR 17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit channel Logon address
1	2	3	4	5	6
L305 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)					Ref to QATAR AIP. DOHA APP.
251500N 0513635E ORMAL	076° 41.9 NM	FL 145 4 500 FT MSL Class C	1	\	Transfer of Control OBBB / OMAE ACC
252304N 0522201E ENANO	076° 3.7 NM				
252348N 0522559E ALSEM	076° 16.1 NM				BAHRAIN ACC EAST LOW
252703N 0524322E ASTOG (FIR BDRY)	076° 6.5 NM				
252822N 0525025E					OBBB / OMAE FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
L319 (RNAV 1) BAHRAIN DVORDME (BAH)					
261551N 0503856E DAVRI	023° 38.0 NM	FL 145 Class C	1	\downarrow	BAHRAIN ACC CENTRAL TMA
264936N 0505732E OBTAR (FIR BDRY)	025° 11.0 NM				
265934N 0510309E					OBBB / OIIX FIR BDRY

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight	Lateral limits (NM)	crui: lev	tion of sing rels	Remarks Controlling unit channel Logon address
		altitude				
1	2	3	4		5	6 OKAC / OBBB FIR BDRY
L438 (RNAV 1) LONOS (FIR BDRY)						For TFC landing within OBBB
283027N 0491713E	137° 15.0 NM	FL 145 4 500 FT MSL Class C	1	\		TFC ENTERING OBBB FIR VIA POSITION LONOS SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION.
LOPOL 281850N 0492845E ATBAG	137° 13.0 NM					BAHRAIN ACC NORTH
280843N 0493844E GODRI	144° 7.0 NM					
280257N 0494308E RAKSO	143° 12.0 NM					
275326N 0495032E GOGRA	143° 5.0 NM					
274918N 0495344E OBNAX	143° 27.0 NM					
272651N 0501103E DEKTA	142° 13.0 NM					
271605N 0501946E VELOG	142° 17.0 NM					BAHRAIN ACC CENTRAL
270215N 0503056E KOBOK	142° 4.0 NM					
265839N 0503349E MOGAS	154° 12.0 NM	FL 145 Class C				TMA BDRY
264800N 0503909E ITOKO	154° 11.0 NM					
263742N 0504416E TOSTA	154° 11.0 NM					
262746N 0504913E ASTAD	143° 12.0 NM					
261812N 0505646E						

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit channel Logon address
1	2	3	4	5	6
L443 (RNAV 1)	2		-	3	OKAC / OBBB FIR BDRY Under ATC Restricion TFC ENTERING OBBB FIR VIA POSI-
RABAP (FIR BDRY)					TION RABAP SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTI- MATING THIS POSITION.
283625N 0492722E TESSO	178° 8.0 NM	FL 145 4 500 FT MSL	1	$ $ \downarrow	
282852N 0492723E LOPOL	171° 10.0 NM	Class C			BAHRAIN ACC NORTH
281850N 0492845E ENAVI	171° 23.0 NM				
275552N 0493152E GIRSI	173° 15.0 NM				BAHRAIN ACC CENTRAL
274126N 0493311E	140° 320°			\downarrow	
ORDAN	31.0 NM				
271706N 0495442E	142° 322°			 	
RAMSI	18.0 NM				
270249N 0500714E GASSI	087° 13.0 NM			1	
270257N 0502229E					1

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

ENR 3.1-11 2 MAR 17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
L564 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)					
251500N 0513635E	176° 356° 19.2 NM	FL 145 4 500 FT MSL Class C	1	\	Ref to QATAR AIP Avbl dly btn 1500-0300 and H24 during FRI & SAT TMA BDRY
245545N 0513714E	190° 10°				TWA DUIT
EMEXA	5.0 NM				
245052N 0513604E DATRI (FIR BDRY)	190° 10° 8.4 NM			<u> </u>	
244239N 0513407E					OBBB / OEJD FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	crui lev	tion of sing rels	Remarks Controlling unit channel Logon address
		Minimum flight altitude				
1	2	3	4	,	5	6
L602						OMAE / OBBB FIR BDRY
(RNAV 1)						
TUMAK (FIR BDRY)	292°	FL 145				BAHRAIN ACC EAST HIGH
255031N 0531108E	26.0 NM	4 500 FT MSL	1			
		Class C			٧	TFC are required to be levelled by ALTOM or before; Avbl only for TFC exiting
		Class C				OBBB FIR via DAVUS; For ORBB FIR
VEDOM						via OKAC FIR
260109N 0524456E	295°					
VELAK	27.0 NM					
261307N 0521821E	294°					
LABOP	13.0 NM					
261907N 0520429E	294°					
ALTOM	8.0 NM					
262230N 0515639E	289°					
BOPOV	6.0 NM					
262430N 0515043E	288°					
ALMOK	12.0 NM					
262832N 0513840E	288°	FL 145				
VEDOS	36.0 NM	Class C				TMA BDRY
264106N 0510045E	287°					
NABOS	9.0 NM					
264355N 0505145E	287°					
MEMKO	7.0 NM					
264611N 0504427E	289°					
MOGAS	5.0 NM					
264800N 0503909E	307°					
TOLMO	11.0 NM					
265504N 0502927E	311°					
EGLIT	11.0 NM					BAHRAIN ACC CENTRAL
270256N 0502006E	311°	FL 145				BATTO WITE A CONTROLL
270230N 0302000E	131°	4 500 FT MSL				
TOKMA	10.0 NM	Class C			•	
270939N 0501159E	322°	01833 0				
27093914 03011392	142°					
ORSOL	15.0 NM					
272135N 0500208E	320°					
272133N 0300206L	140°					BAHRAIN ACC NORTH
ITNAS	32.0 NM					
274644N 0493957E	140°					
27 101111 0100001	320°					Transfer of Control OBBB / OKAC ACC
ENAVI	12.0 NM					
275552N 0493152E	139°					
2, 3332, 3430 1022	319°			A		
DAMUR	7.0 NM			П		
280137N 0492638E	319°				ı	
DAVUS (FIR BDRY)	28.0 NM					
282346N 0490622E						OBBB / OKAC FIR BDRY
202070IN 0430022L			J	<u> </u>		

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight	Lateral limits (NM)	cru	tion of ising rels	Remarks Controlling unit channel Logon address
		altitude				
1	2	3	4		5	6
L768 (RNAV 1)						OMAE / OBBB FIR BDRY
ALPOB (FIR BDRY)						
254218N 0530055E	296° 25.0 NM	FL 145 4 500 FT MSL	1			Avbl only for TFC exiting OEJD FIR via ULADA
ROTAG		Class C			•	
255353N 0523621E	294° 18.0 NM	01000 0				TFC are required to be levelled by RAMKI or before
DASOX						BAHRAIN ACC EAST HIGH
260159N 0521756E MODOG	294° 18.0 NM					
261012N 0515935E RAMKI	294° 3.0 NM					
261138N 0515625E	294° 8.0 NM					TFC are required to be levelled by RAMKI or before
RABLA						
261506N 0514834E SOLOB	294° 17.0 NM					TMA BDRY
262241N 0513132E	288°	FL 145	1			
MEDMA	35.0 NM	Class C				BAHRAIN ACC CENTRAL
263421N 0505454E	287° 10.0 NM					Terrafor of Control ODDD / OF ID / OFDI
ITOKO						Transfer of Control OBBB / OEJD / OERK ACC
263742N 0504416E EGMOR	286° 14.0 NM					
264211N 0502907E ULADA (FIR BDRY)	284° 12.0 NM					
264527N 0501624E						OBBB / OEJD FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Route designator	Track MAG	Upper limit	Lateral	Direc	tion of	Remarks
(RNAV type)	(GEO)	Lower limit	limits		sing	Controlling unit channel
Name of significant points	VOR RDL		(NM)	lev	els/	Logon address
Coordinates	DIST (NM) (COP)	Airspace classification				
	(INIVI) (COP)			Odd	Even	
		Minimum flight				
		altitude			<u> </u>	
1	2	3	4		5	6
M430						OMAE / OBBB FIR BDRY
(RNAV 1)						Ref to QATAR AIP.
						DOHA APP
TOSNA (FIR BDRY)						
251612N 0524116E	266°	FL 145	1		1	
25 10 12 N U524 1 10E	8.8 NM	4 500 FT MSL	'			
D 01 // D	0.0 14141	4 500 FT WISL			Ψ	DOH - ULIKA avbl dly 1900 - 0300 and
BOVIP		Class C				FRI & SAT H24
251555N 0523135E	267°					
DOHA/HAMAD INTL DVORDME	49.9 NM					
(DOH)						
<u> </u>	0740					
251500N 0513635E	271°					
	91°				\downarrow	
LAGNO	19.3 NM				•	
A						
251613N 0511518E	267°					
	87°					Transfer of Control OBBB / OEJD / OERK
GINTO	10.0 NM					ACC
A	267°					
251606N 0510416E						
	87°			1		
ULIKA (FIR BDRY)	23.1 NM					
<u> </u>				-		 OBBB / OEJD FIR BDRY
251545N 0503849E						ODDD / OLUD I IK DDK I

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

NM COP Classification Minimum flight altitude Minimum flight altitude flight altitude Minimum flight altitude flight altitude Minimum flight altitude flight	Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST	Upper limit Lower limit Airspace	Lateral limits (NM)	crui	tion of sing els	Remarks Controlling unit channel Logon address
M444 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)		(NM) (COP)	Minimum flight		Odd	Even	
RNAV 1) DOHA/HAMAD INTL DVORDME (DOH) 251500N 0513635E 187° 4500 FT MSL 1 1 1 1 1 1 1 1 1	1	2	3	4	;	5	6
DOHA/HAMAD INTL DVORDME (DOH) 251500N 0513635E EMISA 254658N 0514207E EMISA 254658N 0514207E PATOM 255821N 0511836E DENVO 260452N 0510509E BAHRAIN DVORDME (BAH) 261551N 0503856E ELOSO 262409N 0503551E DESBU 263240N 0503241E EGMOR 264211N 0502907E EGMOR 264854N 0502200E Ref to Qatar AIP. TMA BDRY Ref to Qatar AIP. Ref to Qatar AIP. TMA BDRY Ref to Qatar AIP. Ref to Qatar AIP. TMA BDRY Ref to Qatar AIP.	M444						
DENVO 14.0 NM 296° 118° 292° Class C 296° 116° 292° Class C 296° 116° 296° 116° 296°	(RNAV 1)						
TIMA BDRY TIMA BDRY TIMA BDRY TIMA BDRY TIMA BDRY	DOHA/HAMAD INTL DVORDME (DOH)						
EMISA 32.3 NM Class C 254658N 0514207E 296° / 116° PATOM 24.0 NM 255821N 0511836E 296° / 116° DENVO 14.0 NM 4 260452N 0510509E 112° / 292° / 292° BAHRAIN DVORDME (BAH) 26.0 NM 261551N 0503856E 158° / 339° ELOSO 9.0 NM 262409N 0503551E 158° / 340° DESBU 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	251500N 0513635E	007°	FL 145	1			
254658N 0514207E 296° / 116° PATOM 24.0 NM 255821N 0511836E 296° / 116° DENVO 14.0 NM 60452N 0510509E 112° / 292° Class C BAHRAIN DVORDME (BAH) 26.0 NM 261551N 0503856E 158° / 339° ELOSO 9.0 NM 058BU 9.0 NM 263240N 0503241E 158° / 340° 10.0 NM 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM		187°	4 500 FT MSL			\downarrow	TMA BDRY
254658N 0514207E 296° / 116° PATOM 24.0 NM 255821N 0511836E 296° / 116° DENVO 14.0 NM 260452N 0510509E 112° / 292° Class C BAHRAIN DVORDME (BAH) 26.0 NM 261551N 0503856E 158° / 339° ELOSO 9.0 NM 262409N 0503551E 158° / 340° DESBU 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	EMISA	32.3 NM	Class C			·	
PATOM 24.0 NM 296° 116°	254658N 0514207E						Ref to Qatar AIP.
PATOM 24.0 NM 255821N 0511836E 296° / 116° DENVO 14.0 NM 112° / 292° FL 145 / Class C BAHRAIN DVORDME (BAH) 26.0 NM 158° / 339° 158° / 339° ELOSO 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	25403011 0314207						
DENVO 14.0 NM DENVO 14.0 NM 260452N 0510509E 112° / 292° / 292° BAHRAIN DVORDME (BAH) 26.0 NM 261551N 0503856E 158° / 339° ELOSO 9.0 NM DESBU 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM AMSI 19.0 NM	PATOM						
DENVO	A						
DENVO 260452N 0510509E 112° 292° Class C BAHRAIN DVORDME (BAH) 261551N 0503856E 158° 339° ELOSO 262409N 0503551E 158° 340° 263240N 0503241E 158° 340° 264211N 0502907E 10.0 NM 264854N 0502200E RAMSI 19.0 NM	255821N 0511836E						DALIDAIN AGG OFNEDAL
BAHRAIN DVORDME (BAH) 26.0 NM 261551N 0503856E 158° 339° ELOSO 262409N 0503551E 9.0 NM 158° 340° DESBU 263240N 0503241E 9.0 NM 158° 340° EGMOR 264211N 0502907E 10.0 NM 135° 315° 315° 315° LOTOR 264854N 0502200E 9.0 NM 135° 315° 315° RAMSI 19.0 NM	DENN'S						BAHRAIN ACC CENTRAL
Description	<u> </u>						
261551N 0503856E 158° / 339° ELOSO 9.0 NM 262409N 0503551E 158° / 340° DESBU 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	260452N 0510509E						
ELOSO 9.0 NM 262409N 0503551E 158° / 340° DESBU 9.0 NM 263240N 0503241E 158° / 340° EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	BAHRAIN DVORDME (BAH)	26.0 NM					
ELOSO 262409N 0503551E DESBU 263240N 0503241E EGMOR 264211N 0502907E LOTOR PONM 264854N 0502200E RAMSI PONM	<u> </u>						
ELOSO 9.0 NM 262409N 0503551E 158°/340° DESBU 9.0 NM 263240N 0503241E 158°/340° EGMOR 10.0 NM 264211N 0502907E 135°/315° LOTOR 9.0 NM 264854N 0502200E 135°/315° RAMSI 19.0 NM	20100114 00000002						
DESBU 9.0 NM 263240N 0503241E 158° 340° EGMOR 10.0 NM 264211N 0502907E 135° 315° LOTOR 9.0 NM 264854N 0502200E 135° 315° RAMSI 19.0 NM	FLOSO						
DESBU 263240N 0503241E 263240N 0503241E 158° 340° 340° 158° 340° 10.0 NM 264211N 0502907E 135° 315° 135° 315° RAMSI 19.0 NM 19.0 NM	A ————						
DESBU 263240N 0503241E EGMOR 10.0 NM 264211N 0502907E LOTOR 264854N 0502200E RAMSI 9.0 NM 158° 340° 10.0 NM 135° 315° 315° 135° 315° 19.0 NM	262409N 0503551E						
EGMOR 10.0 NM 264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM	DECDI						
EGMOR 10.0 NM 264211N 0502907E 135° 315° 315° 10.0 NM 135° 315° 135° 315° 135° 315° 19.0 NM 19.0 NM	<u> </u>						
EGMOR 264211N 0502907E 135° 315° 10.0 NM 135° 315° 10.0 NM	263240N 0503241E						
264211N 0502907E 135° / 315° LOTOR 9.0 NM 264854N 0502200E 135° / 315° RAMSI 19.0 NM		340					
Solution	EGMOR						
LOTOR 9.0 NM 264854N 0502200E 135° RAMSI 19.0 NM	264211N 0502907E						
264854N 0502200E 135° 315° 19.0 NM		315°					
RAMSI 19.0 NM	LOTOR	9.0 NM					
RAMSI 19.0 NM	264854N 0502200E	135°					
		315°					
	RAMSI	19.0 NM					
	270249N 0500714E	142°	FL 145				
322° 4 500 FT MSL BAHRAIN ACC NORTH	27 02 1011 00007 1 12	322°					BAHRAIN ACC NORTH
ORDAN 18.0 NM Class C	ORDAN	18 O NM					B, a ii v aii v v coo i voi ci ii
	<u> </u>		01433 0				
271706N 0495442E	2/1/06N 0495442E						
	CIDCI				↑		
GIRSI 31.0 NM	A				$oxed{oldsymbol{oldsymbol{oldsymbol{eta}}}$		Transfer of October 1 00000 / 01/40 : 00
20.0 NM							Transfer of Control OBBB / OKAC ACC
ENASO						₩	
275707N 0491911E 335°	275707N 0491911E						
DAVUS (FIR BDRY) 29.0 NM	DAVUS (FIR BDRY)	29.0 NM					
282346N 0490622E OBBB / OKAC FIR BDRY	282346N 0490622E						OBBB / OKAC FIR BDRY

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
M600					OMAE / OBBB FIR BDRY
(RNAV 1)					
TUMAK (FIR BDRY)					BAHRAIN ACC EAST HIGH
A	292°	FL 145	4	1	TFC are required to be levelled by ALTOM
255031N 0531108E	26.0 NM	4 500 FT MSL Class C	1	 	or before; Avbl only for TFC exiting OBBB FIR via KUMBO and TFC landing within OKAC FIR.
					All aircraft entering bahrain FIR/UIR at position TUMAK destination OKBK shall ensure routing TUMAK UM600 KUMBO and also ensure that FMS does not capture or turn on AWY UA453 at position ALMOK.
VEDOM					
260109N 0524456E VELAK	295° 27.0 NM				
261307N 0521821E	294°				
LABOP	13.0 NM				
261907N 0520429E ALTOM	294° 8.0 NM				
262230N 0515639E BOPOV	289° 6.0 NM				
262430N 0515043E ALMOK	288° 12.0 NM				TMA BDRY
262832N 0513840E VEDOS	288° 36.0 NM	FL 145 Class C			
264106N 0510045E NABOS	287° 9.0 NM				
264355N 0505145E MEMKO	287° 7.0 NM				
264611N 0504427E MOGAS	289° 5.0 NM				BAHRAIN ACC CENTRAL
264800N 0503909E RAKAK	289° 12.0 NM				
265221N 0502618E RAMSI	300° 20.0 NM				
270249N 0500714E ORNAK	308° 40.0 NM	FL 145 4 500 FT MSL			BAHRAIN ACC NORTH
272854N 0493248E SOLEM	319° 30.0 NM	Class C			
275229N 0491136E KUMBO (FIR BDRY)	328° 28.0 NM				
281705N 0485526E					OBBB / OKAC FIR BDRY

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	crui lev Odd	tion of sing yels Even	Remarks Controlling unit channel Logon address
M677						OKAC / OBBB FIR BDRY
(RNAV 1) RABAP (FIR BDRY)						Not avbl for TFC landing within OBBB FIR; Avbl for TFC landing / overflying northern OMAE FIR
283625N 0492722E	119° 22.0 NM	FL 145 4 500 FT MSL Class C	1	↓		TFC ENTERING OBBB FIR VIA POSITION RABAP SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION.
PASAK						BAHRAIN ACC NORTH
282500N 0494847E GOGMA	146° 12.0 NM					
281421N 0495612E IVIVI	143° 45.0 NM					BAHRAIN ACC CENTRAL
273734N 0502437E VEDOR	143° 34.0 NM					
270855N 0504630E TOSDA	133° 13.0 NM					
270005N 0505629E TORBO	120° 15.0 NM					
265223N 0511024E SOGAN	106° 41.0 NM					BAHRAIN ACC EAST HIGH
263915N 0515408E DEGSO	108° 82.0 NM					
261054N 0531946E OBNET (FIR BDRY)	112° 25.0 NM					
260032N 0534514E						OBBB / OMAE FIR BDRY

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Directio cruisir levels	g Controlling unit channel
1	2	3	4	5	6
N300 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)					Ref to QATAR AIP. DOHA APP.
251500N 0513635E ELOBI	098° 37.7 NM	FL 145 4 500 FT MSL	1	↓	
250753N 0521722E NAMLA (FIR BDRY)	097° 14.7 NM	Class C			
250532N 0523318E					OBBB / OMAE FIR BDRY

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	crui lev Odd	tion of ising yels Even	Remarks Controlling unit channel Logon address 6 OEJD / OBBB FIR BDRY
(RNAV 1) LADNA (FIR BDRY)						
262749N 0502245E ELOSO	105° 12.0 NM	FL 145 Class C	1	→		Avbl only for TFC landing within OBBB FIR and landing / overflying southern OMAE FIR BAHRAIN ACC CENTRAL
262409N 0503551E GOLKO	105° 8.0 NM					
262149N 0504404E ASTAD	106° 12.0 NM					
261812N 0505646E TOTIS	117° 14.0 NM					
261119N 0511027E RASDI	117° 14.0 NM	FL 145 4 500 FT GND				Ref to QATAR AIP.
260425N 0512407E VELAM	117° 20.0 NM	Class C				DOHA APP. BAHRAIN ACC EAST LOW
255426N 0514347E VUTAN 255016N 0515218E	9.0 NM					
RESAR 253707N 0522328E	31.0 NM					Transfer of Control OBBB / OMAE ACC
ALSEM 252703N 0524322E	21.0 NM 119°					
OVONA (FIR BDRY) 252443N 0524739E	5.0 NM					OBBB / OMAE FIR BDRY

Route designator (RNAV type)	Track MAG (GEO)	Upper limit Lower limit	Lateral limits		tion of sing	Remarks Controlling unit channel
Name of significant points Coordinates	VOR RDL DIST (NM) (COP)	Airspace classification	(NM)	lev	rels	Logon address
	(11111) (331)	Minimum flight altitude		Odd	Even	
1	2	3	4		5	6
N685 (RNAV 1)						OEJD/OBBB FIR BDRY
NARMI (FIR BDRY)						
261802N 0501939E	096°	FL 145	1	I		BAHRAIN ACC CENTRAL
	276°	Class C		\downarrow		Avbl for TFC landing within OBBB FIR and
	17.0 NM					not avbl for landing OTBD / OTBH / OTHH and overflying southern OMAE
BAHRAIN DVORDME (BAH)						FIR
261551N 0503856E	112°					
	292°					
DENVO	26.0 NM					
260452N 0510509E	116° 296°	FL 145 4 500 FT GND				
PATOM	14.0 NM	Class C				
255821N 0511836E	116°					
	296°				1	TMA BDRY
EMISA	24.0 NM					
254658N 0514207E	117°					
KAPAX	10.0 NM			$ \downarrow\rangle$		
254218N 0515118E	120°					
ORSIS	27.0 NM					BAHRAIN ACC EAST LOW
252801N 0521636E	114°					
ENANO	9.0 NM					Transfer of Control OBBB / DOHA / OMAE ACC
	117°					ACC
252348N 0522559E TOSNA (FIR BDRY)	16.0 NM					
<u> </u>						OBBB / OMAE FIR BDRY
251612N 0524116E						CODD / CIVIAL I IIX DDIXT

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit channel Logon address
1	2	3	4	5	6
N687 (RNAV 1) ROTEL (FIR BDRY)					OEJD / OBBB FIR BDRY
264015N 0502149E EGMOR	072° 7.0 NM	FL 145 Class C	1	\downarrow	BAHRAIN ACC CENTRAL TMA BDRY
264211N 0502907E MEMKO	072° 14.0 NM				
264611N 0504427E DAVRI	072° 12.0 NM				
264936N 0505732E	074° 12.0 NM	FL 145 4 500 FT MSL			BAHRAIN ACC EAST HIGH
TORBO		Class C			
265223N 0511024E					1

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST	Upper limit Lower limit Airspace	Lateral limits (NM)	Direct cruis lev	sing	Remarks Controlling unit channel Logon address
	(NM) (COP)	classification Minimum flight altitude		Odd	Even	
1	2	3	4	5	5	6
N697 (RNAV 1) NARMI (FIR BDRY)						OEJD / OBBB FIR BDRY
261802N 0501939E	095° 275°	FL 145 Class C	1	↓ ↓	^	BAHRAIN ACC CENTRAL
BAHRAIN DVORDME (BAH)	17.0 NM					
261551N 0503856E GOLKO	034° 8.0 NM			\downarrow		
262149N 0504404E TOSTA	034° 8.0 NM					
262746N 0504913E MEDMA	034° 8.0 NM					TMA BDRY
263421N 0505454E VEDOS	036° 9.0 NM					
264106N 0510045E SODAK	036° 7.0 NM					
264634N 0510530E	035° 7.0 NM	FL 145 4 500 FT MSL				BAHRAIN ACC EAST HIGH
TORBO		Class C				
265223N 0511024E						

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Ever	Controlling unit channel Logon address
1	2	3	4	5	6
P430 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH) \$\blue{251500N 0513635E}\$	035° 215°	FL 145 4 500 FT MSL	1	<u></u>	DOHA APP.
BAYAN 252926N 0514849E KAPAX 254218N 0515118E	18.2 NM 008° 13.0 NM	Class C		<u>*</u> ↑	BAHRAIN ACC EAST LOW Ref to QATAR AIP.
VUTAN 255016N 0515218E ALVEN 255418N 0515315E	8.0 NM 010° 4.1 NM 010°				
BONAN 260201N 0515505E RAMKI	7.9 NM 005° 10.0 NM 359°				
261138N 0515625E ALTOM 262230N 0515639E	11.0 NM				BAHRAIN ACC EAST HIGH

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
P559 (RNAV 1) DAROR (FIR BDRY)					OEJD / OBBB FIR BDRY
270244N 0495815E	087° 8.0 NM	FL 145 4 500 FT MSL	1	Ų .	Not avbl for TFC landing within OBBB FIR; Avbl for TFC landing / overflying north- ern OMAE FIR
RAMSI		Class C			
270249N 0500714E GASSI	087° 13.0 NM				
270257N 0502229E KOBOK	111° 11.0 NM				
265839N 0503349E BOXOG	111° 12.0 NM	FL 145 Class C			TMA BDRY
265404N 0504553E DAVRI	111° 11.0 NM				
264936N 0505732E SODAK	111° 8.0 NM				
264634N 0510530E DANOB	108° 20.0 NM	FL 145 4 500 FT MSL			
263946N 0512640E BOTOB	108° 18.0 NM	Class C			
263350N 0514505E ROSAN	108° 7.0 NM				
263129N 0515220E KUMLA	108° 15.0 NM				BAHRAIN ACC EAST HIGH
262609N 0520822E ASPAK	108° 14.0 NM				
262115N 0522257E TOMSO	111° 38.0 NM				Transfer of Control OBBB / OMAE ACC
260611N 0530214E NALPO (FIR BDRY)	110° 27.0 NM				
255602N 0532945E					OBBB / OMAE FIR BDRY

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction cruisin levels	g	Remarks Controlling unit channel Logon address
1	2	3	4	5		6
(RNAV 1) ORMID (FIR BDRY)						DMAE / OBBB FIR BDRY BAHRAIN ACC EAST HIGH
253354N 0525434E DASLO	296° 25.0 NM	FL 145 4 500 FT MSL	1		√	Avbl for TFC landing within OBBB
254537N 0523029E	295° 26.0 NM	Class C			7	FFC landing within OBBB FIR are required to be at FL 280 or below by
ALKAN						NAGOG and subject to ATC clearance.
255729N 0520456E BONAN	295° 10.0 NM					
260201N 0515505E VEDED	295° 9.0 NM					
260558N 0514628E KUNDO	295° 23.0 NM					
261631N 0512325E SOGAT	295° 9.0 NM	FL 145 Class C			1	rma BDRY
262029N 0511443E ASTAD	259° 16.0 NM				E	BAHRAIN ACC CENTRAL
261812N 0505646E BAHRAIN DVORDME (BAH)	259° 16.0 NM					
261551N 0503856E	275° 95°			^	\downarrow	
NARMI (FIR BDRY)	17.0 NM					
261802N 0501939E					(OBBB / OEJD FIR BDRY

	Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
	1	2	3	4	5	6
`	9 AV 1) KUPSA					Ref to QATAR AIP DOHA APP. TMA BDRY
	250445N 0521151E MEKMA (FIR BDRY)	308° 16.0 NM	FL 145 4 500 FT MSL Class C	1	↑	BAHRAIN ACC EAST LOW
A -	245430N 0522506E		0.030 0			OBBB / OMAE FIR BDRY

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
P975 (RNAV 1)					OKAC / OBBB FIR BDRY Avbl for TFC and landing / overflying
LONOS (FIR BDRY)					southern OMAE FIR.
283027N 0491713E	122° 31.0 NM	FL 145 4 500 FT MSL Class C	1	↓	TFC ENTERING OBBB FIR VIA POSITION LONOS SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION.
ORGEL					BAHRAIN ACC NORTH
281312N 0494614E DATEN	143° 51.0 NM				
273118N 0501832E REVAX	144° 13.0 NM				
272026N 0502651E GETAL	141° 20.0 NM				
270410N 0504040E LOSIS	153° 3.0 NM				
270119N 0504209E BOXOG	153° 8.0 NM				TMA BDRY
265404N 0504553E NABOS	151° 11.0 NM	FL 145 Class C			BAHRAIN ACC CENTRAL
264355N 0505145E TOTIS	151° 37.0 NM				
261119N 0511027E					

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	crui lev Odd	tion of sing rels Even	Remarks Controlling unit channel Logon address
R659		•	7			•
(RNAV 1)						
DOHA/HAMAD INTL DVORDME (DOH)						Ref to QATAR AIP. DOHA APP.
251500N 0513635E	007°	FL 145	1			BAHRAIN ACC EAST LOW
	187°	4 500 FT MSL		Ψ	1	
EMISA	32.3 NM	Class C				
254658N 0514207E	189°					
VELAM	7.6 NM					TMA BDRY
255426N 0514347E	190°					
VEDED	11.8 NM					
260558N 0514628E	190°					
RABLA	9.0 NM					
261506N 0514834E	190°					
BOPOV	10.0 NM					
262430N 0515043E	190°					
ROSAN	7.0 NM					BAHRAIN ACC EAST HIGH
263129N 0515220E	190°					
SOGAN	8.0 NM					
263915N 0515408E	190°				1	
MIDSI (FIR BDRY)	2.0 NM				T	
264142N 0515442E	2.0 14101				<u> </u>	TFC entering OBBB FIR to call on second
207 17210 00 107722						box BAHRAIN ACC EAST on freq 132.850 MHZ at 50 NM prior to MIDSI; OBBB / OIIX FIR BDRY;

TO OIIX
το οιιχ
TO OIIX
TO OIIX
το οιιχ
TO OIIX

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM) Direction of cruising levels Odd Even		Controlling unit channel Logon address
1	2	3	4	5	6
T319 (RNAV 1) DAROR (FIR BDRY) 270244N 0495815E	087°	FL 145	1	ı	OEJD / OBBB FIR BDRY
RAMSI 270249N 0500714E GASSI	8.0 NM 087° 13.0 NM	4 500 FT MSL Class C		 	BAHRAIN ACC CENTRAL
270257N 0502229E VELOG	093° 8.0 NM				
270215N 0503056E ITIXA	093° 6.0 NM				
270142N 0503736E LOSIS	093° 4.0 NM				
270119N 0504209E TOSDA	093° 13.0 NM				
270005N 0505629E OBTAR (FIR BDRY)	093° 6.0 NM				OBBB / OIIX FIR BDRY
265934N 0510309E					

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
T430 (RNAV 1) ALVEN					
255418N 0515315E BONAN	010° 7.9 NM	FL 145 4 500 FT MSL	1	\downarrow	
260201N 0515505E MODOG	024° 9.0 NM	Class C			
261012N 0515935E LABOP	024° 10.0 NM				BAHRAIN ACC EAST HIGH
261907N 0520429E KUMLA	025° 8.0 NM				
262609N 0520822E RAGAS (FIR BDRY)	024° 11.0 NM				OBBB / OIIX FIR
263537N 0521337E					

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST	Upper limit Lower limit Airspace	Lateral limits (NM)	crui	tion of ising /els	Remarks Controlling unit channel Logon address
Coordinates	(NM) (COP)	classification Minimum flight altitude		Odd	Even	
1	2	3	4		5	6
T444						
(RNAV 1)						
DENVO						
260452N 0510509E	113° 26.0 NM	FL 145 Class C	1		\downarrow	Tfc departing via OIIX FIR for LTAA and UBBB FIRs; FL280 and above only or T444
BAHRAIN DVORDME (BAH)						
261551N 0503856E	158°					
ELOSO	9.0 NM					BAHRAIN ACC CENTRAL
262409N 0503551E	158°					
DESBU	9.0 NM					ТМА
263240N 0503241E	158°					
EGMOR	10.0 NM					
264211N 0502907E	135°					
LOTOR	9.0 NM					
264854N 0502200E	135°					
RAMSI	19.0 NM					
270249N 0500714E	142°	FL 145	_			
ORDAN	18.0 NM	4 500 FT MSL				
271706N 0495442E	140°	Class C				
GIRSI	31.0 NM					
274126N 0493311E	341°					BAHRAIN ACC NORTH
DAMUR	21.0 NM					
280137N 0492638E	027°					
GEPUT	13.0 NM					
281307N 0493423E	027°					OBBB / OIIX FIR BDRY
ROTOX (FIR BDRY)	23.0 NM					
283323N 0494809E						

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude 3	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
T659 (RNAV 1) LONOS (FIR BDRY) 283027N 0491713E LOPOL 281850N 0492845E ATBAG 280843N 0493844E GODRI 280257N 0494308E RAKSO 275326N 0495032E GOGRA 274918N 0495344E OBNAX 272651N 0501103E DEKTA 171605N 0501946E VELOG 270215N 0503056E	137° 15.0 NM 137° 13.0 NM 144° 7.0 NM 143° 12.0 NM 143° 5.0 NM 142° 13.0 NM 142° 17.0 NM 142° 4.0 NM	FL 145 4 500 FT MSL Class C	1	\	OKAC / OBBB FIR BDRY TFC ENTERING OBBB FIR VIA POSITION LONOS SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION. BAHRAIN ACC NORTH
▲ KOBOK 265839N 0503349E	111° 12.0 NM	FL 145 Class C			BAHRAIN ACC CENTRAL

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	crui lev	tion of sing rels	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
T659 (RNAV 1) KOBOK 265839N 0503349E	111°	FL 145	1	ı		BAHRAIN ACC CENTRAL
BOXOG	12.0 NM	Class C		↓		
265404N 0504553E DAVRI	111° 11.0 NM			•		TMA BDRY
264936N 0505732E SODAK	111° 8.0 NM					
264634N 0510530E DANOB	108° 20.0 NM	FL 145 4 500 FT MSL				
263946N 0512640E BOTOB	108° 18.0 NM	Class C				
263350N 0514505E ROSAN	108° 7.0 NM					
263129N 0515220E	010° 190°				\downarrow	
BOPOV	7.0 NM					
262430N 0515043E	010° 190°					
RABLA	10.0 NM					
261506N 0514834E	010° 190°					
VEDED	9.0 NM					
260558N 0514628E VELAM	190° 11.8 NM					
255426N 0514347E EMISA	189° 7.8 NM					
254658N 0514207E	187°					Ref to QATAR AIP.
DOHA/HAMAD INTL DVOR	7° 32.3 NM			↓	1	DOHA APP.
251500N 0513635E						

Route designator (RNAV type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (NM) (COP)	Upper limit Lower limit Airspace classification Minimum flight altitude	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	4	5	6
T872 (RNAV 1) ROTEL (FIR BDRY)					OEJD / OBBB FIR BDRY
264015N 0502149E EGMOR	072° 7.0 NM	FL 145 Class C	1	\downarrow	BAHRAIN ACC CENTRAL
264211N 0502907E MEMKO	072° 14.0 NM				TMA BDRY
264611N 0504427E DAVRI	072° 12.0 NM				
264936N 0505732E TORBO	074° 12.0 NM	FL 145 4 500 FT MSL			
265223N 0511024E SOGAN	106° 41.0 NM	Class C			BAHRAIN ACC EAST HIGH
263915N 0515408E RAGAS (FIR BDRY)	100° 18.0 NM				
263537N 0521337E					OBBB / OIIX FIR BDRY



AIP BAHRAIN FIR ENR 3.2-1
17 SEP 15

ENR 3.2 UPPER ATS ROUTES

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15



AIP BAHRAIN FIR ENR 3.3-1 2 MAR 17

ENR 3.3 AREA NAVIGATION (RNAV) ROUTES

Route designator	Way-point	Great circle	Upper limit	Direct	ion of	Remarks
Name of significant points	VOR/DME IDENT	DIST	Lower limit		glevels	Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace	Odd	Even	Logon address
	LEEV BINE / Intollina		classification			
			Minimum Altitude			
1	2	3	4	5		6
UA453						OIIX / OBBB UIR BDRY
(RNAV 1)						
MIDSI (FIR BDRY)						
264142N 0515442E			FL 460		ı	TFC entering OBBB UIR to call on
204 142N 03 13442L			FL 150			second box BAHRAIN EAST at 50
					V	NM prior to MIDSI
DOTOR		12.0	Class A			TFC ENTERING OBBB FIR VIA POSITION MIDSI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL290 TO CONTACT BAHRAIN ACC EAST HIGH ON FREQ 132.125 MHZ, TFC AT AND BELOW FL290 TO CONTACT BAHRAIN ACC EAST LOW ON FREQ 132.850 MHZ.
ВОТОВ						BAHRAIN ACC EAST HIGH
263350N 0514505E		17.0				Only avbl for TFC landing OBBI / OBBS / OBKH / OEDF / OEDR and for TFC routing SOGAT - BAH - KFA at or below FL 240
SOLOB						BAHRAIN ACC CENTRAL
262241N 0513132E						
TOBLI		8.0				
<u> </u>						
262134N 0512301E		8.0				
SOGAT						
262029N 0511443E		40.0				
ASTAD		16.0				
261812N 0505646E						
BAHRAIN DVORDME (BAH)		16.0				
<u> </u>				-		
261551N 0503856E		9.0				
ELOSO				₩		
262409N 0503551E		9.0				
DESBU		0.0				
263240N 0503241E		10.0				
EGMOR		10.0				
264211N 0502907E						
LOTOR		9.0				
A ———						
264854N 0502200E		19.0			1	
RAMSI					<u> </u>	
270249N 0500714E		40.0				
ORNAK		10.0			\forall	
272854N 0493248E						
		30.0				Transfer of Control OBBB / OKAC
SOLEM						ACC
275229N 0491136E		00.0				
KUMBO (FIR BDRY)		28.0				
△ 281705N 0485526E				-		OBBB / OKAC UIR BDRY
201703N 0400320E						

Route designator Name of significant points	Way-point VOR/DME IDENT	Great circle DIST	Upper limit Lower limit		tion of g levels	Remarks Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4	;	5	6
UB415						Ref to QATAR AIP.
(RNAV 1)						
DOHA/HAMAD INTL DVORDME (DOH)						
251500N 0513635E		33.6	FL 460			Below FL245-DOHA APP.
KUPSA		33.0	FL 150	↓		
250445N 0521151E		40.5	Class A		1	
BUNDU (FIR BDRY)		16.5				
250024N 0522924E						OBBB / OMAE UIR BDRY

Route designator	Way-point	Great circle	Upper limit		tion of	Remarks
Name of significant points Coordinates	VOR/DME IDENT BRG & DIST	DIST (NM)	Lower limit	Odd	g levels Even	Controlling unit channel Logon address
	ELEV DME Antenna	,	Airspace classification	Odd	Even	
			Minimum Altitude			
1	2	3	4		5	6
UB416 (RNAV 1)						OKAC / OBBB UIR BDRY TFC ENTERING OBBB FIR VI POSITION AMBIK SHALL ES TABLISH TWO WAY COMMUN CATIONS WITH BAHRAIN AC FIVE MINUTES PRIOR TO EST MATING THIS POSITION, TFI ABOVE FL320 TO CONTAC BAHRAIN ACC NORTH HIG ON FREQ 123.100 MHZ, TFC A
AMBIK (FIR BDRY) 283222N 0492025E TESSO 282852N 0492723E GEVAL		7.0	FL 460 FL 150 Class A	 		AND BELOW FL320 TO CON TACT BAHRAIN ACC NORT LOW ON FREQ 126.700 MHZ. BAHRAIN ACC NORTH
282101N 0494300E GOGMA		13.0				
281421N 0495612E KUVER (FIR BDRY)		10.0			\uparrow	TFC ENTERING OBBB FIR VIPOSITION KUVER SHALL ESTABLISH TWO WAY COMMUN CATIONS WITH BAHRAIN ACFIVE MINUTES PRIOR TO ESTMATING THIS POSITION, TEABOVE FL320 TO CONTACBAHRAIN ACC NORTH HIGON FREQ 123.100 MHZ, TFC AAND BELOW FL320 TO CONTACT BAHRAIN ACC NORTLOW ON FREQ 126.700 MHZ.
A TOVER (FIR BURT)					I	
280924N 0500600E						OBBB / OIIX UIR BDRY

	Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification		tion of g levels Even	Remarks Controlling unit channel Logon address
				Minimum Altitude			
	1	2	3	4		5	6
_	419 NAV 1) RAMSI						
	270249N 0500714E METLA (FIR BDRY)		7.0	FL 460 FL 150 Class A	↑	\	BAHRAIN ACC CENTRAL
	265645N 0500433E				-		OBBB / OEJD UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification		tion of g levels Even	Remarks Controlling unit channel Logon address
			Minimum Altitude			
1	2	3	4		5	6
UB457 (RNAV 1) EMISA						Ref to QATAR AIP.
254658N 0514207E		24.0	FL 460 FL 150		\downarrow	BAHRAIN ACC CENTRAL Below FL245-DOHA APP.
PATOM 255821N 0511836E DENVO		14.0	Class A			
260452N 0510509E BAHRAIN DVORDME (BAH)		26.0				
261551N 0503856E NARMI (FIR BDRY)		17.0		 		
▲ 261802N 0501939E						Transfer of Control OBBB / OEJD / OERK ACC; OBBB / OEJD UIR BDRY TFC ENTERING OBBB FIR VIA POSITION NARMI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING POSITION NARMI. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
1	2	3	Minimum Altitude 4	5	6
UG663	-		<u> </u>		OIIX / OBBB UIR BDRY
(RNAV 1)					
ALSER (FIR BDRY)					
271100N 0504900E			FL 460 FL 150	\downarrow	Tfc entering OBBB UIR to call on sec- ond box BAHRAIN CENTRAL at 50 NM prior to ALSER
		3.0	Class A		TFC ENTERING OBBB FIR VIA POSITION ALSER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC AT AND ABOVE FL340 TO CONTACT BAHRAIN ACC CENTRAL HIGH ON FREQ 127.525 MHZ, TFC AT FL250 UP TO FL330 TO CONTACT BAHRAIN ACC CENTRAL LOW ON FREQ 124.300 MHZ, TFC AT AND BELOW FL240 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ.
VEDOR 270855N 0504630E GETAL		7.0			BAHRAIN ACC EAST HIGH
270410N 0504040E ITIXA		4.0			BAHRAIN ACC CENTRAL
270142N 0503736E KOBOK		5.0			
265839N 0503349E TOLMO		5.0			
265504N 0502927E		4.0			Transfer of Control OBBB / OERK /
RAKAK					OEJD ACC
265221N 0502618E LOTOR		5.0			
264854N 0502200E ULADA (FIR BDRY)		6.0			
264527N 0501624E					OBBB / OEJD UIR BDRY

AIP BAHRAIN FIR ENR 3.3-7 2 MAR 17

Route designator Name of significant points Coordinates	VOR/DME IDENT BRG & DIST ELEV DME Antenna		Upper limit Lower limit Airspace classification Minimum Altitude	Odd	tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4	,	5	6
UL305 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)						Ref QATAR AIP
251500N 0513635E ORMAL		41.9	FL 460 FL 150	\downarrow		Ref QATAR AIP
252304N 0522201E ENANO		3.7	Class A			Below FL245-DOHA APP
252348N 0522559E ALSEM		16.1				
252703N 0524322E ASTOG (FIR BDRY)		6.5				
252822N 0525025E						OBBB / OMAE UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude	Direct cruising Odd		Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UL319 (RNAV 1) BAHRAIN DVORDME (BAH) 261551N 0503856E		38.0	FL 460 FL 150			
DAVRI 264936N 0505732E OBTAR (FIR BDRY) 265934N 0510309E		11.0	Class A	Ψ		OBBB / OIIX UIR BDRY

ENR 3.3-9 2 MAR 17

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude		tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4	5		6
UL438 (RNAV 1) LONOS (FIR BDRY)						OKAC / OBBB UIR BDRY For tfc landing within OBBB
283027N 0491713E		15.0	FL 460 FL 150 Class A	\		TFC ENTERING OBBB FIR VIA POSITION LONOS SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ.
LOPOL 281850N 0492845E ATBAG		13.0				BAHRAIN ACC NORTH
280843N 0493844E GODRI		7.0				
280257N 0494308E RAKSO		12.0				
275326N 0495032E GOGRA		5.0				
274918N 0495344E OBNAX		27.0				
272651N 0501103E DEKTA		13.0				
271605N 0501946E VELOG		17.0				BAHRAIN ACC CENTRAL
270215N 0503056E KOBOK		4.0				
265839N 0503349E MOGAS		12.0				
264800N 0503909E ITOKO		11.0				
263742N 0504416E TOSTA		11.0				
262746N 0504913E ASTAD		12.0				
261812N 0505646E						

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST	Great circle DIST (NM)	Upper limit Lower limit	Direction of cruising levels		Remarks Controlling unit channel Logon address
Cooldinates	ELEV DME Antenna	(INIVI)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4	,	5	6
UL443 (RNAV 1) RABAP (FIR BDRY) 283625N 0492722E			FL 460			OKBK / OBBB UIR BDRY TFC ENTERING OBBB FIR VIA POSITION RABAP SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC ON FREQ 126.700 MHZ FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION. Under ATC Restriction
TESSO 282852N 0492723E		10.0	FL 150 Class A		V	BAHRAIN ACC NORTH
LOPOL 281850N 0492845E ENAVI		23.0				
275552N 0493152E GIRSI		15.0				
274126N 0493311E ORDAN		31.0			\downarrow	
271706N 0495442E RAMSI		18.0		 		BAHRAIN ACC CENTRAL
270249N 0500714E GASSI		13.0		-	\downarrow	
270257N 0502229E						

AIP BAHRAIN FIR ENR 3.3-11 2 MAR 17

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude	Direct cruising Odd		Remarks Controlling unit channel Logon address
1	2	3	4	5	j	6
UL564 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)						
251500N 0513635E LADEM		19.2	FL 460 FL 150 Class A		\downarrow	Ref to QATAR AIP; AvbI dly btn 1500-0300 and H24 during FRI & SAT
245545N 0513714E EMEXA		5.0				
245052N 0513604E DATRI (FIR BDRY)		8.4		 		
244239N 0513407E						OBBB / OEJD FIR BDRY; Transfer of Control DOHA / OBBB ACC

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification	Direct cruising Odd		Remarks Controlling unit channel Logon address
			Minimum Altitude			
1	2	3	4	5)	6
UL602 (RNAV 1) TUMAK (FIR BDRY)						OMAE / OBBB UIR BDRY
255031N 0531108E		26.0	FL 460 FL 150 Class A		\	TFC are required to be levelled by ALTOM or before; Avbl only for tfc exiting OBBB UIR via DAVUS; For ORBB UIR via OKAC UIR BAHRAIN ACC EAST HIGH
260109N 0524456E VELAK		27.0				BARRAIN ACC EAST RIGH
261307N 0521821E LABOP		13.0				
261907N 0520429E ALTOM		8.0				
262230N 0515639E BOPOV		6.0				
262430N 0515043E ALMOK		12.0				
262832N 0513840E VEDOS		36.0				
264106N 0510045E NABOS		9.0				BAHRAIN ACC CENTRAL
264355N 0505145E MEMKO		7.0				
264611N 0504427E MOGAS		5.0				
264800N 0503909E TOLMO		11.0				
265504N 0502927E EGLIT		11.0				
270256N 0502006E TOKMA		10.0			\downarrow	BAHRAIN ACC NORTH
270939N 0501159E ORSOL		15.0				
272135N 0500208E ITNAS		32.0				
274644N 0493957E ENAVI		12.0				
275552N 0493152E DAMUR		7.0		1		Transfer of Control OBBB /
280137N 0492638E		28.0		I		OKAC ACC
DAVUS (FIR BDRY) 282346N 0490622E					V	OBBB / OKAC UIR BDRY

Route designator Name of significant points	Way-point VOR/DME IDENT	Great circle DIST	Upper limit Lower limit		tion of	Remarks Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4	,	5	6
UL768 (RNAV 1)						OMAE / OBBB UIR BDRY Avbl only for TFC exiting
ALPOB (FIR BDRY)						OEJD UIR via ULADA
254218N 0530055E ROTAG		25.0	FL 460 FL 150		\downarrow	BAHRAIN ACC EAST HIGH
255353N 0523621E DASOX		18.0	Class A			
260159N 0521756E MODOG		18.0				
261012N 0515935E						
RAMKI		3.0				TFC are required to be lev- elled by RAMKI or before
261138N 0515625E RABLA		8.0				
261506N 0514834E SOLOB		17.0				
262241N 0513132E MEDMA		35.0				
263421N 0505454E ITOKO		10.0				BAHRAIN ACC CENTRAL
263742N 0504416E EGMOR		14.0				
264211N 0502907E ULADA (FIR BDRY)		12.0				
264527N 0501624E						Transfer of Control OBBB / OEJD / OERK ACC; OBBB / OEJD UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude		tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4	·	5	6
UM430 (RNAV 1) TOSNA (FIR BDRY)	-		-			OMAE / OBBB UIR BDRY
251612N 0524116E BOVIP		8.8	FL 460 FL 150 Class A		\downarrow	Ref to QATAR AIP DOH - ULIKA avbl dly 1900 - 0300 and FRI & SAT H24
251555N 0523135E DOHA/HAMAD INTL DVORDME (DOH)		49.9				
251500N 0513635E LAGNO		19.3			\downarrow	
251613N 0511518E GINTO		10.0				
251606N 0510416E ULIKA (FIR BDRY)		23.1		1		
251545N 0503849E						OBBB / OEJD UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude		tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UM444 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)			FL 460			
251500N 0513635E EMISA		32.3	FL 150		\downarrow	
254658N 0514207E PATOM		24.0	Class A			
255821N 0511836E DENVO		14.0				
260452N 0510509E BAHRAIN DVORDME (BAH)		26.0				
261551N 0503856E ELOSO		9.0				
262409N 0503551E DESBU		9.0		1		
263240N 0503241E EGMOR		10.0		\downarrow	\uparrow	
264211N 0502907E LOTOR		9.0			\downarrow	
264854N 0502200E RAMSI		19.0				
270249N 0500714E ORDAN		18.0				BAHRAIN ACC NORTH
271706N 0495442E GIRSI		31.0		1		
274126N 0493311E ENASO		20.0			\downarrow	
275707N 0491911E DAVUS (FIR BDRY)		29.0				
282346N 0490622E						OBBB / OKAC UIR BDRY;

Route designator	Way-point	Great circle	Upper limit	Direct	ion of	Remarks
Name of significant points Coordinates	VOR/DME IDENT BRG & DIST	DIST (NM)	Lower limit	cruising		Controlling unit channel Logon address
	ELEV DME Antenna	()	Airspace classification	Odd	Even	209011 0001000
			Minimum Altitude			
1	2	3	4	5	5	6
UM600						OMAE / OBBB UIR BDRY
(RNAV 1)						Avbl only for TFC exiting
						OBBB UIR via KUMBO and for landing within OKAC FIR
TUMAK (FID DDDV)						All aircraft entering bahrain FIR/UIR at position TU-MAK destination OKBK shall ensure routing TU-MAK UM600 KUMBO and also ensure that FMS does not capture or turn on AWY UA453 at positive AMACK.
TUMAK (FIR BDRY)			FL 460			tion ALMOK. TFC are required to be lev-
255031N 0531108E VEDOM		26.0	FL 150 Class A		\downarrow	elled by ALTOM or before
260109N 0524456E VELAK		27.0	Class A			BAHRAIN ACC EAST HIGH
261307N 0521821E LABOP		13.0				
261907N 0520429E ALTOM		8.0				
262230N 0515639E BOPOV		6.0				
262430N 0515043E ALMOK		12.0				
262832N 0513840E VEDOS		36.0				
264106N 0510045E NABOS		9.0				
264355N 0505145E MEMKO		7.0				
264611N 0504427E MOGAS		5.0				
264800N 0503909E RAKAK		12.0				BAHRAIN ACC CENTRAL
265221N 0502618E RAMSI		20.0				
270249N 0500714E ORNAK		40.0				BAHRAIN ACC NORTH
272854N 0493248E SOLEM		30.0				
275229N 0491136E KUMBO (FIR BDRY)		28.0				
281705N 0485526E						OBBB / OKAC UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification	Direction of cruising levels Odd Even		Remarks Controlling unit channel Logon address
			Minimum Altitude			
1	2	3	4	5		6
UM677 (RNAV 1) RABAP (FIR BDRY)						OKAC / OBBB UIR BDRYNot avbi for tfc landing in OBBB FIR; Avbl for TFC landing / overflying northern OMAE FIR / UIR
283625N 0492722E		22.0	FL 460 FL 150 Class A	\		TFC ENTERING OBBB FIR VIA POSITION RABAP SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ
PASAK 282500N 0494847E GOGMA		12.0				BAHRAIN ACC NORTH
281421N 0495612E IVIVI		45.0				
273734N 0502437E VEDOR		34.0				
270855N 0504630E TOSDA		13.0				BAHRAIN ACC CENTRAL
270005N 0505629E TORBO		15.0				
265223N 0511024E SOGAN		41.0				BAHRAIN ACC EAST HIGH
263915N 0515408E DEGSO		82.0				Transfer of Control OBBB / OMAE ACC
261054N 0531946E OBNET (FIR BDRY)		25.0				
260032N 0534514E						OBBB / OMAE UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude	Direct cruising Odd	tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UN300 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)						Ref to QATAR AIP
251500N 0513635E ELOBI		37.7	FL 460 FL 150	↓		Below FL245-DOHA APP
250753N 0521722E NAMLA (FIR BDRY)		14.7	Class A			
250532N 0523318E						OBBB / OMAE UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST	Great circle DIST (NM)	Upper limit Lower limit		tion of g levels Even	Remarks Controlling unit channel Logon address	
	ELEV DME Antenna	, ,	Airspace classification	Odd	LVeii	, and the second	
			Minimum Altitude				
1	2	3	4	5		6	
UN318 (RNAV 1)						Transfer of Control OEJD / OBBB ACC; OEJD / OBBB UIR BDRY	
LADNA (FIR BDRY)							
262749N 0502245E			FL 460			TFC ENTERING OBBB FIR VIA POSITION LADNA SHALL ES-	
			FL 150	₩		TABLISH TWO WAY COMMU-	
		12.0	Class A			NICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING POSITION LADNA. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ. For TFC landing within OBBB FIR and landing / overflying southern	
ELOSO						OMAE FIR / UIR at FL 290 or below	
262409N 0503551E GOLKO		8.0					
262149N 0504404E ASTAD		12.0				BAHRAIN ACC CENTRAL	
261812N 0505646E TOTIS		14.0					
261119N 0511027E RASDI		14.0					
260425N 0512407E							
		20.0				Ref to QATAR AIP.	
VELAM						Below FL245-DOHA APP.	
255426N 0514347E VUTAN		9.0				BAHRAIN ACC EAST LOW	
255016N 0515218E RESAR		31.0					
253707N 0522328E							
ALSEM		21.0				Transfer of Control OBBB / OMAE ACC	
252703N 0524322E		5 ^					
OVONA (FIR BDRY)		5.0					
252443N 0524739E						OBBB / OMAE UIR BDRY	

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude	Direction of cruising levels Odd Even	Remarks Controlling unit channel Logon address
	2	3	4	3	OEJD / OBBB UIR BDRY
UN685 (RNAV 1) NARMI (FIR BDRY)					
261802N 0501939E BAHRAIN DVORDME (BAH)		17.0	FL 460 FL 150 Class A	•	TFC ENTERING OBBB FIR VIA POSITION NARMI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MIN- UTES PRIOR TO ESTIMAT- ING POSITION NARMI. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.
261551N 0503856E DENVO		26.0			BAHRAIN ACC CENTRAL
260452N 0510509E PATOM		14.0			
255821N 0511836E EMISA		24.0		1	
254658N 0514207E KAPAX		10.0		\downarrow	
254218N 0515118E ORSIS		27.0			
252801N 0521636E ENANO		9.0			Transfer of Control OBBB / DOHA / OMAE ACC; BAH- RAIN ACC EAST LOW
252348N 0522559E TOSNA (FIR BDRY)		16.0			
251612N 0524116E					OBBB / OMAE UIR BDRY

ENR 3.3-21 26 APR 18

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude		tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UN687 (RNAV 1) ROTEL (FIR BDRY)						OEJD / OBBB UIR BDRY
264015N 0502149E EGMOR		7.0	FL 460 FL 150	\downarrow		BAHRAIN ACC CENTRAL
264211N 0502907E MEMKO		14.0	Class A			
264611N 0504427E DAVRI		12.0				
264936N 0505732E TORBO		12.0				BAHRAIN ACC EAST HIGH
265223N 0511024E						

Route designator Name of significant points	Way-point VOR/DME IDENT	Great circle DIST	Upper limit Lower limit		tion of g levels	Remarks Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4		5	6
UN697 (RNAV 1) NARMI (FIR BDRY)						Transfer of Control OEJD / OBBB ACC; OEJD / OBBB UIR BDRY
261802N 0501939E BAHRAIN DVORDME (BAH)		17.0	FL 460 FL 150 Class A	↓ I	↑	TFC ENTERING OBBB FIR VIA POSITION NARMI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MIN- UTES PRIOR TO ESTIMAT- ING POSITION NARMI. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.
261551N 0503856E GOLKO		8.0		\downarrow	<u> </u>	BAHRAIN ACC CENTRAL
262149N 0504404E TOSTA		8.0				
262746N 0504913E MEDMA		8.0				
263421N 0505454E VEDOS		9.0				
264106N 0510045E SODAK		7.0				BAHRAIN ACC EAST HIGH
264634N 0510530E TORBO		7.0				
265223N 0511024E						

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude	Direct cruising Odd	ion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UP430 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)						Ref to QATAR AIP.
251500N 0513635E BAYAN		18.2	FL 460 FL 150	$ \downarrow$	1	BAHRAIN ACC EAST LOW
252926N 0514849E KAPAX		13.0	Class A	\bigvee		Below FL245-DOHA APP.
254218N 0515118E VUTAN		8.0				
255016N 0515218E ALVEN		4.1				
255418N 0515315E BONAN		7.9				
260201N 0515505E RAMKI		10.0				
261138N 0515625E ALTOM		11.0				BAHRAIN ACC EAST HIGH
262230N 0515639E						

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST	Great circle DIST	Upper limit Lower limit	Direction of cruising levels	Remarks Controlling unit channel Logon address
Coordinates	ELEV DME Antenna	(NM)	Airspace classification	Odd Even	Logon address
			Minimum Altitude		
1	2	3	4	5	6
UP559					OEJD / OBBB UIR BDRY
(RNAV 1)					Not avbl for tfc landing in OBBB FIR; Avbl for TFC landing / over-
DAROR (FIR BDRY)			FI 400		flying northern OMAE FIR / UIR
270244N 0495815E		8.0	FL 460 FL 150 Class A	•	TFC ENTERING OBBB FIR VIA POSITION DAROR SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING POSITION DAROR. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.
RAMSI					
270249N 0500714E GASSI		13.0			
270257N 0502229E KOBOK		11.0			
265839N 0503349E BOXOG		12.0			
265404N 0504553E DAVRI		11.0			
264936N 0505732E SODAK		8.0			BAHRAIN ACC CENTRAL
264634N 0510530E DANOB		20.0			
263946N 0512640E BOTOB		18.0			
263350N 0514505E ROSAN		7.0			
263129N 0515220E KUMLA		15.0			
262609N 0520822E ASPAK		14.0			BAHRAIN ACC EAST HIGH
262115N 0522257E		38.0			Transfer of Control OBBB / OMAE
TOMSO					ACC
260611N 0530214E		27.0			
NALPO (FIR BDRY)		21.0			
255602N 0532945E					OBBB / OMAE UIR BDRY

ENR 3.3-25 26 APR 18

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST	Great circle DIST (NM)	Upper limit Lower limit	cruisin	tion of g levels	Remarks Controlling unit channel Logon address
Coordinates	ELEV DME Antenna	(I VIVI)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4		5	6
UP693 (RNAV 5) DEMTA (FIR BDRY)						OEJD / OBBB / OMAE FIR BDRY
241926N 0513533E BUNDU (FIR BDRY)		64.0	FL 460 FL 195 Class A	\	↑	Acft not to expect climb or descend in BAHRAIN UIR; Route activated by NOTAM
250024N 0522924E						OBBB / OMAE UIR BDRY

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST	Great circle DIST (NM)	Upper limit Lower limit		tion of g levels Even	Remarks Controlling unit channel Logon address
	ELEV DME Antenna	, ,	Airspace classification	Ouu	LVEII	
			Minimum Altitude			
1	2	3	4		5	6
UP699 (RNAV 1)						OMAE / OBBB UIR BDRY; Transfer of Control OMAE / OBBB ACC
ORMID (FIR BDRY)						
253354N 0525434E DASLO		25.0	FL 460 FL 150		\downarrow	
254537N 0523029E		26.0	Class A			TFC landing within OBBB FIR are required to be at FL 280 or below by NA- GOG and subject to ATC clearance.
ALKAN						
255729N 0520456E BONAN		10.0				BAHRAIN ACC EAST HIGH
260201N 0515505E VEDED		9.0				
260558N 0514628E KUNDO		23.0				
261631N 0512325E SOGAT		9.0				
262029N 0511443E ASTAD		16.0				BAHRAIN ACC CENTRAL
261812N 0505646E BAHRAIN DVORDME (BAH)		16.0				
261551N 0503856E NARMI (FIR BDRY)		17.0		\downarrow	\downarrow	OBBB / OEJD UIR BDRY
261802N 0501939E						TFC ENTERING OBBB FIR VIA POSITION NARMI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTI-MATING POSITION NARMI. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.

26 APR 18

Route designator Name of significant points	VOR/DME IDENT	Great circle DIST	Upper limit Lower limit		tion of g levels	Remarks Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4		5	6
UP899						Ref to QATAR AIP.
(RNAV 1)						
KUPSA						Below FL245-DOHA APP
250445N 0521151E			FL 460			BAHRAIN ACC EAST LOW
		16.0	FL 150		1	
MEKMA (FIR BDRY)			Class A			
245430N 0522506E						OBBB / OMAE UIR BDRY

Route designator Name of significant points	Route designator Way-point Great circle Upper limit ame of significant points VOR/DME IDENT DIST Lower limit				tion of g levels	Remarks Controlling unit channel
Coordinates	BRG & DIST ELEV DME Antenna	(NM)	Airspace classification	Odd	Even	Logon address
			Minimum Altitude			
1	2	3	4		5	6
JP975 RNAV 1) LONOS (FIR BDRY)						OKAC / OBBB UIR BDRY
<u> </u>			FL 460			 TFC ENTERING OBBB FIR VI
283027N 0491713E			FL 150	$ \downarrow$		POSITION LONGS SHALL ES TABLISH TWO WAY COMMU
ORGEL		31.0	Class A			NICATIONS WITH BAHRAII ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSTION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACT NORTH HIGH ON FREE 123.100 MHZ, TFC AT AN BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOV ON FREQ 126.700 MHZ. Transfer of Control OKACT OBBB ACCT
281312N 0494614E						
DATEN		51.0				BAHRAIN ACC NORTH
273118N 0501832E REVAX		13.0				
272026N 0502651E GETAL		20.0				BAHRAIN ACC CENTRAL
270410N 0504040E LOSIS		3.0				
270119N 0504209E BOXOG		8.0				
265404N 0504553E NABOS		11.0				
264355N 0505145E TOTIS		37.0				
261119N 0511027E				1		

Route designator Name of significant points Coordinates	Way-point VOR/DME IDENT BRG & DIST ELEV DME Antenna	Great circle DIST (NM)	Upper limit Lower limit Airspace classification Minimum Altitude		tion of g levels Even	Remarks Controlling unit channel Logon address
1	2	3	4		5	6
UR659 (RNAV 1) DOHA/HAMAD INTL DVORDME (DOH)						Ref to QATAR AIP. Below FL245-DOHA APP.
251500N 0513635E EMISA		32.3	FL 460 FL 150	↓	↑	BAHRAIN ACC EAST LOW
254658N 0514207E VELAM		7.6	Class A			
255426N 0514347E VEDED		11.8				
260558N 0514628E RABLA		9.0				
261506N 0514834E BOPOV		10.0				BAHRAIN ACC EAST HIGH
262430N 0515043E ROSAN		7.0				TFC entering OBBB UIR to call on second box BAH-RAIN EAST SECTOR at 50 NM prior to MIDSI
263129N 0515220E SOGAN		8.0				
263915N 0515408E MIDSI (FIR BDRY)		2.0			1	OBBB / OIIX UIR BDRY
264142N 0515442E						TFC ENTERING OBBB FIR VIA POSITION MIDSI SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL290 TO CONTACT BAHRAIN ACC EAST HIGH ON FREQ 132.125 MHZ, TFC AT AND BELOW FL290 TO CONTACT BAHRAIN ACC EAST LOW ON FREQ 132.850 MHZ.

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	crui le	tion of ising rels Even	Controlling unit Frequency
1	2	3	4		5	6
UT308 (RNAV 1) DAROR (FIR BDRY)						OEJD / OBBB UIR BDRY; AVBL for TFC from OEJD FIR TO OIIX FIR.
270244N 0495815E RAMSI	8.0 NM	FL 460 FL 150		↓		TFC ENTERING OBBB FIR VIA POSI- TION DAROR SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH
270249N 0500714E GASSI	13.0 NM	Class A				BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING POSITION DAROR.
270257N 0502229E VELOG	8.0 NM					TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330
270215N 0503056E ITIXA	6.0 NM					TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.
270142N 0503736E LOSIS	4.0 NM					
270119N 0504209E TOSDA	13.0 NM					
270005N 0505629E TORBO	15.0 NM					
265223N 0511024E SOGAN	41.0 NM					BAHRAIN ACC EAST HIGH
263915N 0515408E RAGAS (FIR BDRY)	18.0 NM					OBBB / OIIX FIR BDRY.
263537N 0521337E						

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	cru lev Odd	tion of ising rels Even	Remarks Controlling unit Frequency
UT319 (RNAV 1) DAROR (FIR BDRY) 270244N 0495815E RAMSI 270249N 0500714E GASSI 270257N 0502229E VELOG 70215N 0503056E ITIXA 270142N 0503736E LOSIS 270119N 0504209E TOSDA 270005N 0505629E	8.0 NM 13.0 NM 8.0 NM 6.0 NM 13.0 NM	FL 460 FL 150 Class A		\		OEJD / OBBB UIR BDRY TFC ENTERING OBBB FIR VIA POSITION DAROR SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING POSITION DAROR. TFC FLY BTN FL250 AND FL330 TO CONTACT BAHRAIN ACC ON FRQ 124.300 MHZ AND TFC ABOVE FL330 TO CONTACT BAHRAIN ACC ON FRQ 127.525 MHZ.BAHRAIN CENTRAL HIGH
OBTAR (FIR BDRY) 265934N 0510309E						OBBB / OIIX UIR BDRY

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit Frequency
1	2	3	4	5	6
UT430 (RNAV 1) ALVEN					
255418N 0515315E BONAN	7.9 NM	FL 460 FL 150		\downarrow	
260201N 0515505E MODOG	9.0 NM	Class A			
261012N 0515935E LABOP	10.0 NM				BAHRAIN ACC EAST HIGH
261907N 0520429E KUMLA	8.0 NM				
262609N 0520822E RAGAS (FIR BDRY)	11.0 NM				OBBB / OIIX UIR
263537N 0521337E					

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit Frequency
1	2	3	4	5	6
UT438 (RNAV 1)					DTF sub-lands for TFO landing IMI ODDD FID
KUVER (FIR BDRY) 280924N 0500600E GOGRA	23 NM	FL 460 FL 150 Class A		\	RTE avbl only for TFC landing WI OBBB FIR TFC ENTERING OBBB FIR VIA POSITION KUVER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ
274918N 0495344E OBNAX	27.0 NM				BAHRAIN ACC NORTH
272651N 0501103E DEKTA	13.0 NM				
271605N 0501946E VELOG	17.0 NM				
270215N 0503056E KOBOK	4.0 NM				BAHRAIN ACC CENTRAL
265839N 0503349E MOGAS	12.0 NM				
264800N 0503909E ITOKO	11.0 NM				
263742N 0504416E TOSTA	11.0 NM				
262746N 0504913E ASTAD	12.0 NM				
261812N 0505646E TOTIS	14.0 NM				OIIX / OBBB UIR BDRY
261119N 0511027E					

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit Frequency
1	2	3	4	5	6
UT444					
(RNAV 1)					
DENVO					
260452N 0510509E	26.0 NM	FL 460			
		FL 150		↓	Tfc departing via OIIX FIR for LTAA and
DALIDANI DVODDAE (DALI)		Class A			UBBB FIRs; FL280 and above only on
BAHRAIN DVORDME (BAH)					UT444.
261551N 0503856E	9.0 NM				
ELOSO					
262409N 0503551E	9.0 NM				
DESBU					
263240N 0503241E	10.0 NM				
EGMOR					
264211N 0502907E	9.0 NM				
LOTOR					BAHRAIN ACC CENTRAL
▲ 264854N 0502200E	19.0 NM				B, ii ii v iii v ii v ii v ii v ii v ii
204054N 0502200E RAMSI	10.0 14101				
A —	40.0 NM				
270249N 0500714E	18.0 NM				
ORDAN					
271706N 0495442E	31.0 NM				
					Levels avbl within OBBB UIR FL280 And
GIRSI					above . TFC required to be levelled by
A	04.0 NIM				GIRSI or before.
274126N 0493311E	21.0 NM				BAHRAIN ACC NORTH
DAMUR					
280137N 0492638E	13.0 NM				
GEPUT					
281307N 0493423E	23.0 NM				OBBB / OIIX UIR BDRY
ROTOX (FIR BDRY)					
283323N 0494809E			1		
	ı		1	1	

	Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit Frequency
	1	2	3	4	5	6
	557 NAV 1)					OMAE / OBBB UIR BDRY
	TUMAK (FIR BDRY)					Avbl only for TFC exiting OBBB UIR via RAGAS; FL320 AND FL380 not avbl within OBBB UIR.
	255031N 0531108E VEDOM	26.0 NM	FL 460 FL 255		1	BAHRAIN ACC EAST HIGH
	260109N 0524456E VELAK	27.0 NM	Class A			TFC required to be levelled before REP VELAK or before; BAHRAIN ACC EAST HIGH
•	261307N 0521821E	23.0 NM				Transfer of Control OBBB / OIIX ACC;
•	RAGAS (FIR BDRY) 263537N 0521337E					OBBB / OIIX UIR BDRY

Route designator	Track MAG	Upper limit	Lateral	Direction of	
(RNP type) Name of significant points	(GEO) VOR RDL	Lower limit	limits	cruising levels	Controlling unit Frequency
Coordinates	DIST	Airspace	(NM)	Odd Even	Frequency
	(COP)	classification			
1	2	3	4	5	6
UT602					
(RNAV 1)					OMAE / ODDD LIID DDDV
TUMAK (FIR BDRY)	22.2.1114	FI 100			OMAE / OBBB UIR BDRY
255031N 0531108E	26.0 NM	FL 460			
VEDOM		FL 255		₩	Levels avbl within OBBB UIR FL300 And above.
A ———	27.0 NM	Class A			above .
260109N 0524456E	27.0 INIVI				
VELAK					
261307N 0521821E	13.0 NM				
					TFC are required to be levelled by
LABOP					LABOP or before
261907N 0520429E	8.0 NM				
ALTOM					
262230N 0515639E	6.0 NM				BAHRAIN ACC EAST HIGH
BOPOV					
262430N 0515043E	12.0 NM				
ALMOK					
262832N 0513840E	36.0 NM				
VEDOS					
A	9.0 NM				
264106N 0510045E	9.0 MW				
NABOS					BAHRAIN ACC CENTRAL
264355N 0505145E	7.0 NM				
MEMKO					
264611N 0504427E	5.0 NM				
MOGAS					
264800N 0503909E	11.0 NM				
TOLMO					
265504N 0502927E	11.0 NM				
EGLIT					
▲ 270256N 0502006E	10.0 NM				
	10.0 14101				
TOKMA	45 O NIM				
270939N 0501159E	15.0 NM				
ORSOL					
272135N 0500208E	32.0 NM				BAHRAIN ACC NORTH
ITNAS					
274644N 0493957E	16.0 NM				
GODRI					
280257N 0494308E	31.0 NM				OBBB / OIIX UIR BDRY
ROTOX (FIR BDRY)					
283323N 0494809E					
200020IN 0434003E			1	1	

AIP BAHRAIN FIR ENR 3.3-37 26 APR 18

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Controlling unit Frequency
1	2	3	4	5	6
UT659 (RNAV 1) LONOS (FIR BDRY)					OKAC / OBBB FIR BDRY

Route designator	Track MAG	Upper limit	Lateral	Direction of	Remarks
(RNP type)	(GEO)	Lower limit	limits	cruising	Controlling unit
Name of significant points Coordinates	VOR RDL DIST	Airspace	(NM)	levels	Frequency
	(COP)	classification		Odd Even	
1	2	3	4	5	6
283027N 0491713E	15.0 NM	FL 460 FL 150 Class A		\	TFC ENTERING OBBB FIR VIA POSITION LONOS SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ. To be assigned by ATC only for traffic destination WI state of QATAR.
281850N 0492845E	13.0 NM				tion wi state of QATAR.
ATBAG					BAHRAIN ACC NORTH
280843N 0493844E	7.0 NM				
GODRI					
280257N 0494308E RAKSO	12.0 NM				
275326N 0495032E GOGRA	5.0 NM				
274918N 0495344E OBNAX	27.0 NM				
272651N 0501103E DEKTA	13.0 NM				
271605N 0501946E VELOG	17.0 NM				
270215N 0503056E KOBOK	4.0 NM				BAHRAIN ACC CENTRAL
265839N 0503349E BOXOG	12.0 NM				
265404N 0504553E DAVRI	11.0 NM				
264936N 0505732E SODAK	8.0 NM				
264634N 0510530E DANOB	20.0 NM				
263946N 0512640E BOTOB	18.0 NM				
263350N 0514505E ROSAN	7.0 NM				
263129N 0515220E BOPOV	7.0 NM				
262430N 0515043E RABLA	10.0 NM				
261506N 0514834E VEDED	9.0 NM				
260558N 0514628E VELAM	11.8 NM				
255426N 0514347E EMISA	7.6 NM				
254658N 0514207E DOHA/HAMAD INTL DVORDME (DOH)	32.3 NM			↓ ↑	Ref to QATAR AIP. Below FL245-DOHA APP.
251500N 0513635E				1	
	1				

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	limits (NM)	Direction of cruising levels Odd Even	Controlling unit Frequency
1	2	3	4	5	6
UT677 (RNAV 1)					OIIX / OBBB UIR; Not avbl for tfc landing in OBBB FIR; Avbl for TFC landing / overflying northern OMAE UIR
KUVER (FIR BDRY)					
280924N 0500600E IVIVI	36.0 NM	FL 460 FL 255 Class A		\	TFC ENTERING OBBB FIR VIA POSITION KUVER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ BAHRAIN ACC NORTH
270855N 0504630E TOSDA 270005N 0505629E TORBO	13.0 NM				BAHRAIN ACC CENTRAL
265223N 0511024E SOGAN	41.0 NM				
263915N 0515408E DEGSO	82.0 NM				BAHRAIN EAST HIGH
261054N 0531946E OBNET (FIR BDRY)	25.0 NM				OBBB / OMAE UIR
260032N 0534514E					

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit Frequency
1	2	3	4	5	6
UT872 (RNAV 1) ROTEL (FIR BDRY)					OEJD / OBBB UIR BDRY
264015N 0502149E EGMOR	7.0 NM	FL 460 FL 150		\downarrow	BAHRAIN ACC CENTRAL
264211N 0502907E MEMKO	14.0 NM	Class A			
264611N 0504427E DAVRI	12.0 NM				
264936N 0505732E TORBO	12.0 NM				
265223N 0511024E SOGAN	41.0 NM				BAHRAIN ACC EAST HIGH
263915N 0515408E RAGAS (FIR BDRY)	18.0 NM				OBBB / OIIX UIR BDRY
263537N 0521337E					

Route designator (RNP type) Name of significant points Coordinates	Track MAG (GEO) VOR RDL DIST (COP)	Upper limit Lower limit Airspace classification	Lateral limits (NM)	Direction of cruising levels Odd Even	Remarks Controlling unit Frequency
1	2	3	4	5	6
UT975	_				OIIX / OBBB UIR BDRY
(RNAV 1)					Not Avbl for TFC landing WI OBBB FIR only
KUVER (FIR BDRY)					for overflying / landing southern OMAE.
280924N 0500600E	40.0 NM	FL 460 FL 255 Class A		\	TFC ENTERING OBBB FIR VIA POSITION KUVER SHALL ESTABLISH TWO WAY COMMUNICATIONS WITH BAHRAIN ACC FIVE MINUTES PRIOR TO ESTIMATING THIS POSITION, TFC ABOVE FL320 TO CONTACT BAHRAIN ACC NORTH HIGH ON FREQ 123.100 MHZ, TFC AT AND BELOW FL320 TO CONTACT BAHRAIN ACC NORTH LOW ON FREQ 126.700 MHZ.
A	12 O NIM				DALIDAIN ACC NODTH
273118N 0501832E REVAX	13.0 NM				BAHRAIN ACC NORTH
272026N 0502651E GETAL	20.0 NM				
270410N 0504040E LOSIS	3.0 NM				
270119N 0504209E BOXOG	8.0 NM				
265404N 0504553E NABOS	11.0 NM				
264355N 0505145E TOTIS	37.0 NM				BAHRAIN ACC CENTRAL
261119N 0511027E RASDI	14.0 NM				
260425N 0512407E VELAM	20.0 NM				
255426N 0514347E VUTAN	9.0 NM				
255016N 0515218E RESAR	31.0 NM				BAHRAIN ACC EAST LOW
253707N 0522328E ALSEM	21.0 NM				Transfer of Control OBBB / OMAE ACC
252703N 0524322E OVONA (FIR BDRY)	5.0 NM				OBBB / OMAE UIR.
252443N 0524739E					



AIP BAHRAIN FIR ENR 3.4-1 17 SEP 15

ENR 3.4 HELICOPTER ROUTES

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15



AIP BAHRAIN FIR ENR 3.5-1 17 SEP 15

ENR 3.5 OTHER ROUTES

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15



AIP BAHRAIN FIR ENR 3.6-1
4 JAN 18

ENR 3.6 EN-ROUTE HOLDING

HLDG ID / FIX / WPT coordinates	INBD TR (°MAG)	Direction of PTN	MAX IAS (KT)	MNM - MAX HLDG LVL FL / FT (MSL)	TIME (MIN)	Controlling unit and Frequency
1	2	3	4	5	6	7
AFNAN 250300.80N 0515958.92E	268	Right	230	FL 250 FL 460	1.5	BAHRAIN EAST HIGH 132.125 MHZ
ALMOK 262832.00N 0513840.00E	288	Right		6000 FT FL 460	1.5	Bahrain East
ALRAS 262805N 0503200E	300	Right	210	3000FT 13000FT	1.5	BAHRAIN APPROACH 127.850 MHZ
ALTOM 262230.00N 0515639.00E	294	Right		6000 FT FL 460	1.5	Bahrain East 132.85 MHZ
GOLBI 261445.72N 0505212.46E	231	Right	230	3000FT 13000FT	1.5	BAHRAIN APPROACH 127.850 MHZ
ITNAS 274643.70N 0493957.02E	320	Right		6000 FT FL 460	1.5	Bahrain North 126.700 MHZ
MARWA 262208.05N 0502747.07E	302	Left	240	5000 FT FL 150	1.5	BAHRAIN APPROACH 127.850 MHZ
NAGAT 261549N 0505319E	120	Left	210	3000FT 13000FT	1.5	BAHRAIN APPROACH 127.850 MHZ
OBSAS 262622N 0504525E	122	Right	240	5000 FT FL 150	1.5	BAHRAIN APPROACH 127.850 MHZ
PAXEM 262714.97N 0503034.48E	121	Left	230	3000FT 13000FT	1.5	BAHRAIN APPROACH 127.850 MHZ
RAZAN 261021.0N 0504813.8E	122	Right	240	5000 FT FL 150	1.5	BAHRAIN APPROACH 127.850 MHZ
SOGAT 262029.00N 0511443.00E	292	Right	240	5000 FT FL 220	1.5	BAHRAIN APPROACH 127.850 MHZ
SOLOB 262241.00N 0513132.00E	294	Right		6000 FT FL 460	1.5	Bahrain East 132.850 MHZ
VELOG 270215.03N 0503055.83E	142	Left	240	5000 FT FL 210	1.5	BAHRAIN APPROACH 127.850 MHZ



AIP BAHRAIN FIR ENR 4.1-1
17 SEP 15

ENR 4. RADIO NAVIGATION AIDS/SYSTEMS

ENR 4.1 RADIO NAVIGATION AIDS - EN-ROUTE

Name of station (VAR) VOR: Declination)	ID	FREQ (CH)	Hours of operation	Coordinates		Coordinates ELEV DME Antenna	
1	2	3	4		5	6	7
BAHRAIN DVOR/DME (2°E)	BAH	115.300 MHZ (CH 100X)	H24	261551.12N	0503855.88E	35.89 FT	NIL
DOHA/HAMAD INTL DVOR/DME (2.30°E)	DOH	114.400 MHZ (CH 91X)	H24	251459.66N	0513634.80E	39.343 FT	Refer to QATAR AIP.

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15



AIP BAHRAIN FIR ENR 4.2-1
17 SEP 15

ENR 4.2 SPECIAL NAVIGATION SYSTEMS

NIL



AIP BAHRAIN FIR ENR 4.3-1
17 SEP 15

ENR 4.3 GLOBAL NAVIGATION SATELLITE SYSTEM (GNSS)

NIL



ENR 4.4 NAME-CODE DESIGNATORS FOR SIGNIFICANT POINTS

Name-code designator	Coordinates	ATS route or other route	Remarks
1	2	3	4
AFNAN	250300.80N 0515958.92E	Note 4	
ALKAN	255729N 0520456E	P699, UP699	
ALMOK	262832.00N 0513840.00E	L602, M600, UL602, UM600, UT602	
ALPOB	254218.00N 0530055.00E	L768, UL768	
ALRAS	262805N 0503200E	Note 1	
ALSEM	252703.45N 0524322.04E	L305, N318, UL305, UN318, UT975	
ALSER	271100.00N 0504900.00E	G663, UG663	
ALTOM	262230.00N 0515639.00E	L602, M600, P430, UL602, UM600, UP430, UT602	
ALVEN	255418.19N 0515315.30E	P430, T430, UP430, UT430	
AMBIK	283222.0N 0492025.0E	B416, UB416	
ASPAK	262115.49N 0522257.49E	P559, UP559	
ASTAD	261811.64N 0505646.41E	A453, L438, N318, P699, UA453, UL438, UN318, UP699, UT438	
ASTOG	252822.0N 0525025.0E	L305, UL305	
ATBAG	280842.99N 0493844.26E	L438, T659, UL438, UT659	
AWALI	260510.9706N 0503112.5281E	Note 1	
BAYAN	252926.0N 0514849.0E	P430, UP430	
BONAN	260200.60N 0515505.41E	P430, P699, T430, UP430, UP699, UT430	
BOPOV	262429.69N 0515043.17E	L768, UL768	
вотов	263350.00N 0514505.00E	A453, P559, T659, UA453, UP559, UT659	
BOVIP	251554.84N 0523135.04E	M430, UM430	
BOXOG	265403.81N 0504553.48E	P559, P975, T659, UP559, UP975, UT659, UT975	
BUNDU	250024.00N 0522924.00E	B415, UB415, UP693	
DAMUR	280137.46N 0492637.95E	L602, T444, UL602, UT444	
DANOB	263946.00N 0512640.00E	P559, T659, UP559, UT659	
DAROR	270244.03N 0495815.25E	P559, T308, T319, UP559, UT308, UT319	
DASLO	254537.09N 0523029.35E	P699, UP699	
DASOX	260159.00N 0521756.00E	L602, M600, R659,T659,UL602, UM600, UR659, UT602,UT659	
DATEN	273118.44N 0501832.26E	P975, UP975, UT975	
DATRI	244239.38N 0513407.28E	L564, UL564	
DAVRI	264936.05N 0505731.88E	L319, N687, P559, T659, T872, UL319, UN687, UP559, UT659, UT872	
DAVUS	282346.28N 0490622.28E	L602, M444, UL602, UM444	
DEGSO	261054.00N 0531946.00E	M677, UM677, UT677	
DEKTA	271605.08N 0501946.46E	L438, T659, UL438, UT438, UT659	
DEMTA	241926.02N 0513532.83E	UP693	
DENVO	260452.00N 0510509.00E	B457, L604, M444, N685, T444, UB457, UL604, UM444, UN685, UT444	
DESBU	263240.00N 0503241.00E	A453, M444, T444, UA453, UM444, UT444	
EGLIT	270255.95N 0502005.80E	L602, UL602, UT602	
EGMOR	264210.81N 0502906.73E	A453, L768, M444, N687, T444, T872, UA453, UL768, UM444, UN687, UT444, UT872	
EGTAB	282608.92N 0491021.71E	Note 3	
ELELO	263220N 0503501E	Note 1	

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Name-code designator	С	oordinates	ATS route or other route	Remarks
1		2	3	4
ELOBI	250752.66N	0521721.87E	N300, UN300	
ELOSO	262409.19N	0503550.70E	A453, M444, N318, T444, UA453, UM444, UN318, UT444	
EMEXA	245051.67N	0513603.93E	L564, UL564	
EMISA	254658.35N	0514206.68E	B457, L604, M444, N685, R659, T659, UB457, UL604, UM444, UN685, UR659, UT659	
ENAKO	284205.43N	0493647.95E	Note 3	
ENANO	252348.09N	0522558.66E	L305, L604, N685, UL305, UL604, UN685	
ENASO	275706.87N	0491911.13E	M444, UM444	
ENAVI	275552.10N	0493151.77E	L443, L602, UL443, UL602	
GASSI	270257.00N	0502229.00E	L443, P559, T308, T319, UL443, UP559, UT308, UT319	
GEPUT	281307.00N	0493423.00E	T444, UT444	
GETAL	270409.98N	0504039.93E	G663, P975, UG663, UP975, UT975	
GETEK	264610.44N	0501537.83E	Note 3	
GEVAL	282101.0N	0494300.0E	B416, UB416	
GINTO	251605.56N	0510415.88E	M430, UM430	
GIRSI	274126.04N	0493310.51E	L443, M444, T444, UL443, UM444, UT444	
GODRI	280256.85N	0494307.68E	L438, T659, UL438, UT602, UT659	
GOGMA	281421.00N	0495612.00E	B416, M677, UB416, UM677	
GOGRA	274918.00N	0495344.00E	L438, T659, UL438, UT438, UT659	
GOLKO	262149.22N	0504404.35E	N318, N697, UN318, UN697	
ITIXA	270141.57N	0503735.51E	G663, T308, T319, UG663, UT308, UT319	
ITNAS	274643.70N	0493957.02E	L602, UL602, UT602	
ITOKO	263742.00N	0504416.00E	L438, L768, UL438,UL768, UT438,	
IVIVI	273734.00N	0502437.00E	M677, UM677, UT677	
JALYD	260002.0N	0504513.0E	Note 1	
KAPAX	254217.62N	0515118.39E	L604, N685, P430, UL604, UN685, UP430	
ковок	265839.18N	0503349.32E	G663, L438, P559, T659, UG663, UL438, UP559, UT438, UT659	
KUMBO	281705.00N	0485526.00E	A453, M600, UA453, UM600	
KUMLA	262609.00N		P559, T430, UP559, UT430	
KUNDO	261631.00N	0512325.00E	P699, UP699	
KUPSA	250445.0N	0521151.0E	B415, P899, UB415, UP899	
KUVER	280924.0N	0500600.0E	B416, UB416, UT438, UT677, UT975	
LABOP	261907.00N	0520429.00E	L602, M600, T430, UL602, UM600, UT430, UT602	
LADEM	245545.14N	0513713.63E	L564, UL564	
LADNA	262749.34N	0502244.63E	N318, UN318	
LAGNO	251613.00N	0511518.00E	M430, UM430	
LONOS	283027.00N	0491713.00E	L438, P975, T659, UL438, UP975, UT659	
LOPOL	281849.62N	0492845.12E	L438, L443, T659, UL438, UL443, UT659	
LOSIS	270118.51N	0504208.73E	P975, T308, T319, UP975, UT308, UT319, UT975	
LOTOR	264854.45N	0502200.30E	A453, G663, M444, T444, UA453, UG663, UM444, UT444	

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS

MEKMA 245430.0N 0522506.0E P899. U MEMKO 264611.18N 0504427.16E L602. M MEMKO 264611.18N 0504427.16E L602. M MMODOR 265645.21N 0500432.59E B419. U MIDSI 264142.00N 0515442.00E A453. R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L4 UM600, UM600, UM600, NABOS 264354.84N 0505145.23E L602, M UP975, NAGAT 261549N 0505319E Note 1 NALPO 255602.00N 0532945.00E P559, U NARMI 261802.33N 0501939.01E B457, L0 UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, Ti OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T ORDAN 271706.38N	97, UL768, UN697 1899 100, N687, T872, UL602, UN687, UT602, UT872 1419 159, UA453, UR659 130, UL768, UT430 102, M600, UL438, UL602, UT438, UT602 100, P975, UL602, UM600, UT602, UT975
MARWA 262208.05N 0502747.07E Note 1 8 MEDMA 263421.34N 0505454.02E L768, N MEKMA 245430.0N 0522506.0E P899, U MEMKO 264611.18N 0504427.16E L602, M MEMKO 264611.18N 0504427.16E L602, M MIDSI 26545.21N 0500432.59E B419, U MIDSI 264142.00N 0515442.00E A453, R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L0 MOGAS 264354.84N 0505145.23E L602, M NABOS 264354.84N 0505145.23E L602, M NALPO 255602.00N 0532945.00E P559, U NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, Li NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, Ti OBSAS 262622N <td< th=""><th>97, UL768, UN697 2899 00, N687, T872, UL602, JN687, UT602, UT872 3419 59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 2559 J300 04, N685, N697, P699, UB457,</th></td<>	97, UL768, UN697 2899 00, N687, T872, UL602, JN687, UT602, UT872 3419 59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 2559 J300 04, N685, N697, P699, UB457,
MEDMA 263421.34N 0505454.02E L768, N MEKMA 245430.0N 0522506.0E P899, U MEMKO 264611.18N 0504427.16E L602, M MEMKO 264611.18N 0504427.16E L602, M MIDSI 264142.00N 0515442.00E A453, R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L4 UM600, NABOS 264354.84N 0505145.23E L602, M NAGAT 261549N 0505319E Note 1 Note 1 NALPO 255602.00N 0532945.00E P559, U U NARMI 261802.33N 0501939.01E B457, L0 UL604, NONTI 262924N 0511919E Note 3 O OBNAX 272650.91N 0501103.18E L438, Ti OBNAX 272650.91N 0501103.18E L438, Ti OBSAS 262622N 0504525E Note 1 8 OBTAR 265934.00N 05	97, UL768, UN697 9899 00, N687, T872, UL602, JN687, UT602, UT872 4419 59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 9559 J300 04, N685, N697, P699, UB457,
MEKMA 245430.0N 0522506.0E P899, U MEMKO 264611.18N 0504427.16E L602, M MEMKO 264611.18N 0504427.16E L602, M METLA 265645.21N 0500432.59E B419, U MIDSI 264142.00N 0515442.00E A453, R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L4 UM600, NABOS 264354.84N 0505145.23E L602, M NAGAT 261549N 0505319E Note 1 Note 1 NALPO 255602.00N 0532945.00E P559, U NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, L0 NARMI 261802.33N 0501939.01E B457, L0 NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, Ti OBSAS 262622N 0504525E Note 1.8 OBTAR	2899 00, N687, T872, UL602, JN687, UT602, UT872 3419 59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 2559 1300 04, N685, N697, P699, UB457,
MEMKO 264611.18N 0504427.16E L602, M UM600, METLA METLA 265645.21N 0500432.59E B419, U M600, METLA MIDSI 264142.00N 0515442.00E A453, R MODOG MODOG 261012.00N 0515935.00E L768, T MODOG MOGAS 264759.61N 0503909.06E L438, L4 UM600, MODOG NABOS 264354.84N 0505145.23E L602, M UP975, MUP975, MODOG NAGAT 261549N 0505319E Note 1 NALPO 255602.00N 0532945.00E P559, U MODOG NARMI 261802.33N 0501939.01E B457, L4 UL604, MODOG NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, TU MODOG OBNAX 272650.91N 0501103.18E L438, TU MODOG OBSAS 262622N 0504525E Note 18 OBTAR 265934.00N 0510309.00E L319, TS ORDAN 271706.38N 0495442.06E L443, MUT444 ORGEL 281312.28N 0496414.32E	00, N687, T872, UL602, UN687, UT602, UT872 1419 59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, UT438, UT602 00, P975, UL602, UM600, UT602, UT975 1559 1300 04, N685, N697, P699, UB457,
METLA 265645.21N 0500432.59E B419, U MIDSI 264142.00N 0515442.00E A453, R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L4 UM600, NABOS 264354.84N 0505145.23E L602, M UP975, NAGAT 261549N 0505319E Note 1 NALPO 255602.00N 0532945.00E P559, U NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, L4 UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T4 OBNET 260032.00N 0534514.00E M677, L OBSAS 26622N 0504525E Note 18 OBTAR 265934.00N 0510309.00E L319, T5 OBTAR 265934.00N 0510309.00E L319, T5 ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0496614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMAL 252303.74N 0522200.97E L305, U ORMAL 252303.74N 0522200.97E L305, U ORMAK 272853.74N 0493248.10E A453, N ORSIS 252801.00N 0524739.00E N318, U ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L UL604, P ORONA 255821.41N 0511836.36E B457, L UL604, P	UN687, UT602, UT872 1419 59, UA453, UR659 30, UL768, UT430 D2, M600, UL438, UL602, UT438, UT602 00, P975, UL602, UM600, UT602, UT975 P559 U300 D4, N685, N697, P699, UB457,
MIDSI 264142.00N 0515442.00E A453, R MODOG 261012.00N 0515935.00E L768, T MOGAS 264759.61N 0503909.06E L438, L6 MOGAS 264354.84N 0505145.23E L602, M NABOS 264354.84N 0505319E Note 1 NAGAT 261549N 0505319E Note 1 NALPO 255602.00N 0532945.00E P559, U NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, L6 UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T6 OBNAX 272650.91N 0501103.18E L438, T6 OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M ORMAL 252303.74N 0522200.97E L305, U ORMAL 25233.74N <td>59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 0559 1300 04, N685, N697, P699, UB457,</td>	59, UA453, UR659 30, UL768, UT430 02, M600, UL438, UL602, JT438, UT602 00, P975, UL602, UM600, JT602, UT975 0559 1300 04, N685, N697, P699, UB457,
MODOG 261012.00N 0515935.00E L768, TMOGAS 264759.61N 0503909.06E L438, LG UM600, NABOS 264354.84N 0505145.23E L602, MUP975, NAGAT 261549N 0505319E Note 1 NALPO 255602.00N 0523318.0E N300, UMARMI 261802.33N 0501939.01E B457, LG UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, TG OBNET 260032.00N 0534514.00E M677, LG UMARMI 261802.33N 0501939.01E M677, LG UMAGAS 262622N 0504525E NOTE 1 80032.00N 0534514.00E M677, LG UMAGAS 262622N 0504525E NOTE 1 80032.00N 0510309.00E L319, TG ORDAN 271706.38N 0495442.06E L443, MG UT444 ORGEL 281312.28N 0494614.32E P975, UMAGAS 272650.91N 05010309.00E L319, TG ORMAL 252303.74N 0522200.97E L305, UMAGAS 272853.74N 0493248.10E A453, MG ORSIS 252801.00N 0524739.00E L604, NG ORSIS 252801.00N 0524739.00E N318, UMAGAS 282459.91N 0494846.65E M677, LG ORSIS 252821.41N 0511836.36E B457, LG UL604, NG ORSIS 26422 NG ORSIS 26422 NG ORSIS 26	30, UL768, UT430 D2, M600, UL438, UL602, UT438, UT602 00, P975, UL602, UM600, UT602, UT975 P559 U300 D4, N685, N697, P699, UB457,
MOGAS 264759.61N 0503909.06E L438, L6 UM600, UM	D2, M600, UL438, UL602, UT438, UT602 00, P975, UL602, UM600, UT602, UT975 P559 U300 D4, N685, N697, P699, UB457,
NABOS 264354.84N 0505145.23E L602, M	UT438, UT602 00, P975, UL602, UM600, UT602, UT975 UT559 U300 04, N685, N697, P699, UB457,
NAGAT	P559 N300 D4, N685, N697, P699, UB457,
NALPO 255602.00N 0532945.00E P559, U NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, L0 UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T0 OBNET 260032.00N 0534514.00E M677, U OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT4444 UT4444 UT4444 UT4444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N OVONA 252443.00N 0524739.00E N318, U OVONA 252443.00N </td <td>N300 D4, N685, N697, P699, UB457,</td>	N300 D4, N685, N697, P699, UB457,
NAMLA 250532.0N 0523318.0E N300, U NARMI 261802.33N 0501939.01E B457, L0 U604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T0 OBNET 260032.00N 0534514.00E M677, L OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604,	N300 D4, N685, N697, P699, UB457,
NARMI 261802.33N 0501939.01E B457, L0 UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T0 OBNET 260032.00N 0534514.00E M677, L OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, Li UL604,	04, N685, N697, P699, UB457,
UL604, NONTI 262924N 0511919E Note 3 OBNAX 272650.91N 0501103.18E L438, T0 OBNET 260032.00N 0534514.00E M677, U OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT4444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, L0 UL604,	
OBNAX 272650.91N 0501103.18E L438, T0 OBNET 260032.00N 0534514.00E M677, L OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604, N UL604, N UL604, N	
OBNET 260032.00N 0534514.00E M677, L OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604, N UL604, N UL604, N	
OBSAS 262622N 0504525E Note 1.8 OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 UT444 UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, LU UL604, UL604, UL604, UL604,	59, UL438, UT438, UT659
OBTAR 265934.00N 0510309.00E L319, T3 ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604, UL604, U	M677, UT677
ORDAN 271706.38N 0495442.06E L443, M UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604, UL604, U	2
UT444 ORGEL 281312.28N 0494614.32E P975, U ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, N ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, Li UL604,	19, UL319, UT319
ORMAL 252303.74N 0522200.97E L305, U ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, LU UL604, V U U	44, T444, UL443, UM444,
ORMID 253354.00N 0525434.00E P699, U ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, LI UL604, UL604, U	975
ORNAK 272853.74N 0493248.10E A453, M ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604,	305
ORSIS 252801.00N 0521636.00E L604, N ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604,	9699
ORSOL 272135.03N 0500207.77E L602, U OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, L PATOM 255821.41N 0511836.36E B457, L UL604, UL604, U	600, UA453, UM600
OVONA 252443.00N 0524739.00E N318, U PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, LU UL604, 0511836.36E 0511836.36E 0511836.36E	85, UL604, UN685
PASAK 282459.91N 0494846.65E M677, U PATOM 255821.41N 0511836.36E B457, L UL604,	602, UT602
PATOM 255821.41N 0511836.36E B457, Li UL604,	J318, UT975
UL604,	M677
PEGOK 253254N 0520759E Note 3	04, M444, N685, UB457, M444, UN685
RABAP 283625.20N 0492722.07E L443, M	77, UL443, UM677
RABLA 261505.73N 0514833.68E L768, R UT659	59, T659, UL768, UR659,
RADMO 260231N 0504125E Note 1	
RAGAS 263537.00N 0521337.00E T308, T- UT557,	30, T872, UT308, UT430, IT872
RAKAK 265221.00N 0502618.00E G663, N	600, UG663, UM600
RAKSO 275326.20N 0495032.49E L438, TO	59, UL438, UT659
RAMKI 261138.00N 0515625.06E L768, Po	
T308, T UL443,	30, UL768, UP430
	19, L443, M444, M600, P559, 19, T444, UA453, UB419, M444, UM600, UP559,
RAZAN 261021.0N 0504813.8E Note 1.8	19, L443, M444, M600, P559, 19, T444, UA453, UB419, IM444, UM600, UP559, IT319, UT444
	19, L443, M444, M600, P559, 19, T444, UA453, UB419, M444, UM600, UP559, IT319, UT444
REVAX 272026.10N 0502651.27E P975, U	19, L443, M444, M600, P559, 19, T444, UA453, UB419, M444, UM600, UP559, IT319, UT444

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

AIP BAHRAIN FIR

ΕN	IR 4.4-	4
26	APR 1	8

Name-code designator	Coordinates	ATS route or other route	Remarks
1	2	3	4
RIGAG	262157.0N 0504241.0E	Note 1 & 2	
ROSAN	263129.13N 0515220.05E	P559, R659, T659, UP559, UR659, UT659	
ROTAG	255353.00N 0523621.00E	L768, UL768	
ROTEL	264015.01N 0502149.08E	N687, T872, UN687, UT872	
ROTOX	283323.00N 0494809.00E	T444, UT444, UT602	
SOBUS	282137.42N 0490253.99E	Note 3	
SODAK	264634.00N 0510530.00E	N697, P559, T659, UN697, UP559, UT659	
SOGAN	263915.00N 0515408.00E	M677, R659, T308, T872, UM677, UR659, UT308, UT677, UT872	
SOGAT	262029.00N 0511443.00E	A453, P699, UA453, UP699	
SOLAV	260742N 0504027E	Note 1	
SOLEM	275229.24N 0491136.38E	A453, M600, UA453, UM600	
SOLOB	262241.00N 0513132.00E	A453, L768, UA453, UL768	
TESSO	282852.00N 0492723.00E	B416, L443, UB416, UL443	
TOBLI	262134.0N 0512301.0E	A453, UA453	
TOKMA	270938.98N 0501159.02E	L602, UL602, UT602	
TOLMO	265504.00N 0502927.00E	G663, L602, UG663, UL602, UT602	
TOMSO	260611.00N 0530214.00E	P559, UP559	
TORBO	265222.68N 0511024.30E	M677, N687, N697, T308, T872, UM677, UN687, UN697, UT308, UT677, UT872	
TOSDA	270004.88N 0505629.45E	M677, T308, T319, UM677, UT308, UT319, UT677	
TOSNA	251612.00N 0524116.00E	L604, M430, N685, UL604, UM430, UN685	
TOSTA	262746.42N 0504912.51E	L438, N697, UL438, UN697, UT438	
TOTIS	261119.11N 0511026.91E	N318, P975, UN318, UP975, UT438, UT975	
TOXAM	253658N 0524816E	Note 3	
TUMAK	255031.00N 0531108.00E	L602, M600, UL602, UM600, UT557, UT602	
ULADA	264526.72N 0501623.55E	G663, L768, UG663, UL768	
ULAMU	264452.04N 0501659.80E	Note 3	
ULIKA	251545.29N 0503848.79E	M430, UM430	
UMAVA	260552N 0504648E	Note 1	
VEDED	260558.26N 0514627.91E	P699, R659, T659, UP699, UR659, UT659	
VEDOM	260109.00N 0524456.00E	L602, M600, UL602, UM600, UT557, UT602	
VEDOR	270855.00N 0504630.00E	G663, M677, UG663, UM677, UT677	
VEDOS	264105.85N 0510044.69E	L602, M600, N697, UL602, UM600, UN697, UT602	
VELAK	261307.00N 0521821.00E	L602, M600, UL602, UM600, UT557, UT602	
VELAM	255426.12N 0514347.13E	N318, R659, T659, UN318, UR659, UT659, UT975	
VELOG	270215.03N 0503055.83E	L438, T308, T319, T659, UL438, UT308, UT319, UT438, UT659	
VUTAN	255015.91N 0515218.39E	N318, P430, UN318, UP430, UT975	

Note 1: Part of SID or STAR.

Note 2: Traffic sequence waypoints.

AIRAC AMDT 05/18 CIVIL AVIATION AFFAIRS AIP BAHRAIN FIR ENR 4.4-5
26 APR 18

Note 3: Only for record, states requirement to record / locate position not connected with airways but used for LOA (Letter of Agreement) between ATS units and considered important to disseminate them.

Note 4: Only for enroute holding purposes.

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18



AIP BAHRAIN FIR ENR 4.5-1
17 SEP 15

ENR 4.5 AERONAUTICAL GROUND LIGHTS - EN-ROUTE

NIL



AIP BAHRAIN FIR ENR 5.1-1
17 SEP 15

ENR 5. NAVIGATION WARNINGS

ENR 5.1 PROHIBITED, RESTRICTED AND DANGER AREAS

5.1.1 CLASSIFICATION

5.1.1.1 All airspace in which a potential hazard to aircraft operations may exist and all areas over which the operation of civil aircraft may, for one reason or another, be restricted either temporarily or permanently, are classified according to the following three types of area as defined by ICAO.

5.1.1.1.1 PROHIBITED AREA

An airspace of defined dimensions, above the land areas or territorial waters of a State, within which the flight of aircraft is prohibited. This term is used only when the flight of civil aircraft within the designated airspace is not permitted at any time under any circumstances.

5.1.1.1.2 RESTRICTED AREA

An airspace of defined dimensions, above the land areas or territorial waters of a State, within which the flight of aircraft is restricted in accordance with certain specified conditions. This term is used whenever the flight of civil aircraft within the designated airspace is not absolutely prohibited but may be made only if specified conditions are complied with. Thus, prohibition of flight except at certain specified times leads to the designation of the airspace as a "Restricted Area", as would prohibition except in certain meteorological conditions. Similarly, prohibition of flight unless special permission has been obtained leads to the designation of a "Restriction Area". However, conditions of flight imposed as a result of application of the Rules of the Air or air traffic services practices or procedures, (For example, compliance with minimum safe heights or with rules stemming from the establishment of controlled airspace) do not constitute conditions calling for designation of a "Restricted Area".

5.1.1.1.3 DANGER AREA

An airspace of defined dimensions within which activities dangerous to the flight of aircraft may exist at specified times. This term is used only when the potential danger to aircraft has not led to the designation of the airspace as "Restricted" or "Prohibited". The effect of the creation of the Danger Area is to caution operators or pilots of aircraft that it is necessary for them to assess the dangers in relation to their responsibility for the safety of their aircraft.

5.1.2 GENERAL

5.1.2.1 The TYPE of area is indicated by the letters:

"D" for Danger - followed by number 1 to 39
"P" for Prohibited - followed by number 40 to 49

"R" for Restricted - followed by number 50 and above

5.1.2.2 Each Area is described in a tabulation which indicates:

Its lateral and vertical limits
The type of restriction or hazard involved
The time at which the area is active, and
Any other pertinent information

- 5.1.2.3 The positions of these Areas are also shown on the Airspace Charts, see ENR 6.
- 5.1.2.4 Altitudes are given in feet.

Prohibited , Restricted and Danger areas:

Identification, name and lateral limits	Upper limit Lower limit	Remarks (time of activity, type of restriction, nature of hazard, risk of interception)
1	2	3
PROHIBITED AREAS		
OBP42 BAHRAIN 260936N 0503036E 260936N 0503342E 260648N 0503342E 260648N 0503200E 260548N 0503036E	UNL SFC	H24
OTP43 QATAR 2556N 05100E 2556N 05120E 2540N 05120E 2540N 05100E	UNL SFC	H24
OTP44 QATAR / WUSAYL A circle of radius 1 NM centred on 252700N 0513230E	1500 FT SFC	H24
OTP45 QATAR A circle of radius 1 NM centred on 251728N 0513143E	1500 FT SFC	H24
OTP46 QATAR / RAYYAN A circle of radius 1 NM centred on 2517N 05128E	1500 FT SFC	H24 Exemptions granted only by Commander - in - Chief, Public Security.
OTP47 QATAR A circle of radius 1.5 NM centred on 251747N 0512308E	5000 FT SFC	H24
RESTRICTED AREAS		
OTR51 QATAR / AL GHARIYEH A circle of radius 5 NM centred on 260431N 0512040E	3000 FT SFC	HJ Light Aircraft FlyingPPR from GHQ Qatar
OTR52 QATAR Area encloses Qatar territorial land and water boundaries.	UNL SFC	H24 Controlling Authority State of Qatar Military flying activities.
OTR53 QATAR 2608N 05112E 2620N 05121E 2608N 05141E 2555N 05135E	3000 FT SFC	H24 Controlling Authority State of Qatar Military exercise area
OTR54 QATAR 245400N 0512940E 245140N 0512940E 245140N 0512720E 245400N 0512720E	1500 FT SFC	H24 Remotely controlled pilotless vehicles (RPV)

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

Identification, name and lateral limits	Upper limit Lower limit	Remarks (time of activity, type of restriction, nature of hazard, risk of interception)
1	2	3
OTR55 RAS LAFFAN A circle of radius 4 NM centred on 255403N 0513405E	3000 FT SFC	H24 Aircraft intending to fly below ALT 3000 FT to obtain prior permission from RAS LAFFAN RLC Head of Security: TEL +974 44733447 FAX +974 44733429 Industrial area
OTR56 QATAR A circle of radius 5 NM centred on 250533.927N 0511933.084E	5000 FT SFC	H24
OBR57 Area encloses entire Bahrain Island contained within the following coordinates:-261523N 0502608E 261523N 0503446E 260957N 0504032E 255000N 0503800E 254959N 0503639E 254553N 0503416E 255001N 0503153E 255000N 0503100E 255715N 0502605E	UNL SFC	H24. Except on instructions from Bahrain ATC
OTR58 QATAR A circle 1.5 NM centred on 251200N 0512430E	3000 FT SFC	H24
OTR59 UMM SAID FERTILIZER PLANT A circle of 3NM radius centred on 245400.00N 0513400.00E	3000FT SFC	H24
OTR60 QATAR A circle of radius 500 M centered on 254553N 0512253E	1000 FT SFC	H24 Remote Control Aircraft
OTR61 UMM SAID MILITARY TRAINING AREA A circle of radius 3 NM centered on 245900N 0513000E	3000 FT AGL SFC	H24 Helicopter Training Flights Area
OTR62 UMM AL-SHOKHOT A circle of radius 1NMcentered on 254204.25N 0512127.72E	1500FT SFC	H24 Light ACFT Training Area
OBR66 BAHRAIN 260457N 0503655E 255806N 0504838E 253934N 0504955E 253445N 0504543E 253524N 0503241E 255353N 0501821E	UNL SFC	Military Exercise Area. Controlled and activated by Bahrain Defense Force
DANGER AREAS OTD1 QATAR / ALQALAEL 2436N 05055E 2454N 05055E 2454N 05104E 2436N 05104E	27000 FT SFC	H24 Artillery, Heavy Machine Gun, Air Defense Weapons, Ground to Air

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

Identification, name and lateral limits	Upper limit Lower limit	Remarks (time of activity, type of restriction, nature of hazard, risk of interception)
1	2	3
OTD2 QATAR 243606N 0505507E 242949N 0510408E 242950N 0511128E 243556N 0511217E	27000 FT SFC	H24 Air Defense Weapons, Ground to Air.
OBD8 BAHRAIN 271100N 0504900E 270400N 0505618E 265500N 0511000E 265424N 0511148E 263512N 0503954E 264424N 0502906E	FL 150 4500 FT	SUN - THU 04:00 - 21:00 Military jet training.Traffic on ATS route P425, UP425, P559, UP559, L768, UL768, M872, UM872, G663, UG663, N929, UN929, P975 and UP975 to follow ATC instruction and to expect re-routing.
OTD17 QATAR 252550N 0504500E 252500N 0503700E 250700N 0504000E 244500N 0504900E 244550N 0505140E 250700N 0504600E	4 <u>5000 FT</u> SFC	Military jet training; Active daily between 0300 - 1900 UTC except FRI AND SAT
OTD26 QATAR / BIR ZIRKIT A circle 5 NM centred on 2530N 05052E	3500 FT SFC	H24 Gun Firing.
OTD28 ALASHAT 2459.00N 05216.00E 2500.50N 05210.60E 2457.40N 05151.40E 2456.40N 05150.00E 2447.60N 05150.00E 2452.50N 05214.40E 2453.80N 05216.00E	27000 FT SFC	Activity as notified by NOTAM Air to Air / Surface to Air Firing
OTD29 QATAR 250830N 0512200E 250930N 0512330E 251100N 0512200E 251030N 0512030E	500 FT SFC	H24 Ground to Ground Gun Firing
EMIRATES		
RESTRICTED AREAS		
OMR54 SHAHEEN 244600N 0523000E 244600N 0523800E 243600N 0531800E 243100N 0533830E 242800N 0535500E 242424N 0540828E 241805N 0542246E 241930N 0543100E 24000N 0550000E 234730N 0552312E 223730N 0550748E 225600N 0523500E 244080N 0513500E 244080N 0513500E 244830N 0521540E	SFC	H24 Controlled by UAE Air Force. Military Jet Training Area.

AIRAC AMDT 06/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR ENR 5.2-1 17 SEP 15

ENR 5.2 MILITARY EXERCISE AND TRAINING AREAS AND AIR DEFENCE IDENTIFICATION ZONE (ADIZ)

NIL



AIP BAHRAIN FIR ENR 5.3-1 17 SEP 15

ENR 5.3 OTHER ACTIVITIES OF A DANGEROUS NATURE AND OTHER POTENTIAL HAZARDS

NIL



AIP BAHRAIN FIR ENR 5.4-1 17 SEP 15

ENR 5.4 AIR NAVIGATION OBSTACLES - EN-ROUTE

(Height 330 FT (100 M) or higher)

Designation	OBST type	OBST position	ELEV/HGT (FT)	OBST LGT Type/ Colour	Remarks
1	2	3	4	5	6
NIL	Mast	261859N 0501202E	NIL / 330	OBST / R	NIL
NIL	Mast	262203N 0500135E	454 / 405	OBST / R	NIL

Note: "For state of Qatar obstacle refer to Qatar AIP"



AIP BAHRAIN FIR ENR 5.5-1 17 SEP 15

ENR 5.5 AERIAL SPORTING AND RECREATIONAL ACTIVITIES

NIL



AIP BAHRAIN FIR

ENR 5.6-1

4 JAN 18

ENR 5.6 WILDLIFE MANAGEMENT

5.6.1 BAHRAIN INTERNATIONAL AIRPORT (OBBI)

Proximity to the sea provides a constant risk of bird-strike. Of greatest risk to aircraft are migratory birds, which are present in increased numbers during the winter.

Critical area infringements are exacerbated during high tide when birds search for roosts located on the airfield. Significant numbers of birds are attracted to any standing water, so extra caution should be exercised following periods of rain or when standing water is observed in the runway strip.

Any bird-strike event should be reported to ATC as soon as possible, as BIA employs a management strategy which is constantly updated.

5.6.2 BAHRAIN SAKHIR AIRBASE (OBKH) & ISA AIRBASE (OBBS)

5.6.2.1 Location and Habitat


- Sakhir airbase is situated in the middle of Bahrain on the western side of the highest point on the island, Jabal Al Dukan, The habitant is
 essentially semi-desert with tufts of scrub grass and occasional small desert plants and occasional naturally occurring small trees of
 around 4 meters in height.
- 2. The airfield is boarded by small ridges to the west and to the east by rising ground towards the Jabal Al Dukan, To the east and west there is very little vegetation; however, on the runway approaches to the north and south, there are artificially planted large gardens. There are date palms and small and medium sized shurbs and trees up to 7 metres in height which can attract birds.
- 3. The climate is hot and dry in summer with temperatures normally reaching the mid forty degress centigrade during July and August, In winter it is normally mild and frost free, starying mainly dry with the occasional day of heavy rain which can cause some flooding.
- 4. As Bahrain is an island, the airbase is subject to sea influences and strong winds can be a frequent occurrence causing rising sand, dust and sand storms.

5.6.2.2 Wildlife


- 1. Wildlife activity around the base is assessed as light. Whilst, the occasional feral dog has been seen, the airfield is protected by fencing and there have been no incursions on the airfield since the fencing has been strengthened and repaired.
- 2. Bird activity is assessed as very light in summer and light in winter. Occasional flocks of gulls have been sighted on the airfield in winter, other bird activity is confined to small numbers of doves, plovers, lapwings and small game birds (Partridge) that are often seen throughout the year in small numbers of 2-6 individuals rather than folcks, Mainly is spring and autumn, small groups of ducks of around 3-5 in number have been observed crossing the airfield on an occasional basis.

CIVIL AVIATION AFFAIRS AIRAC AMDT 01/18




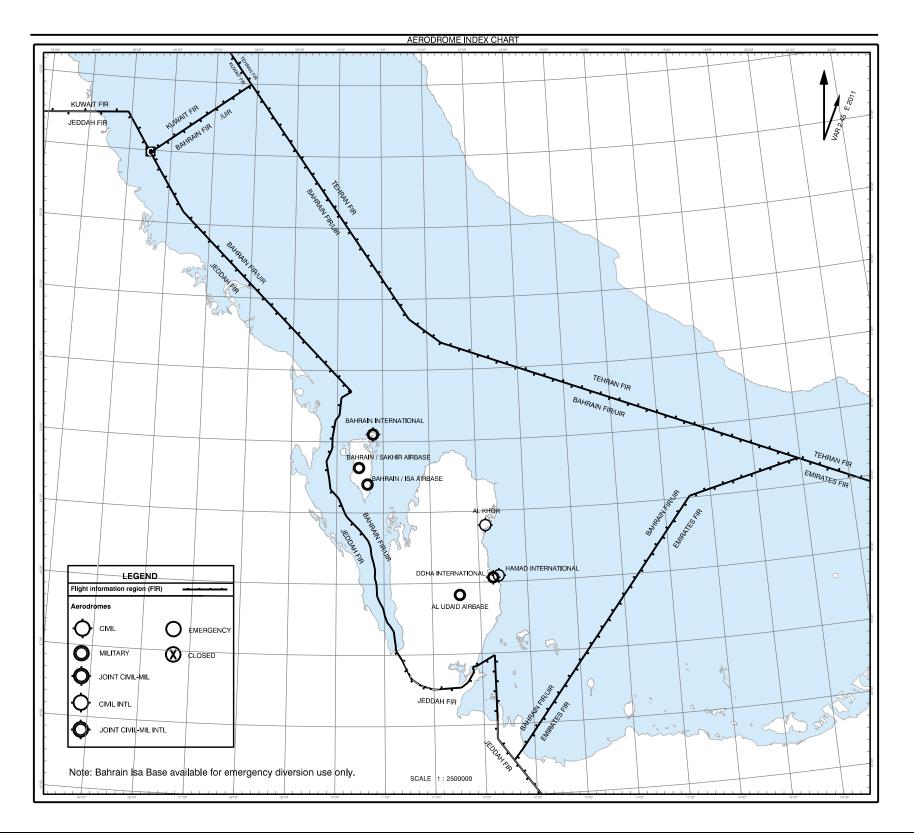


AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

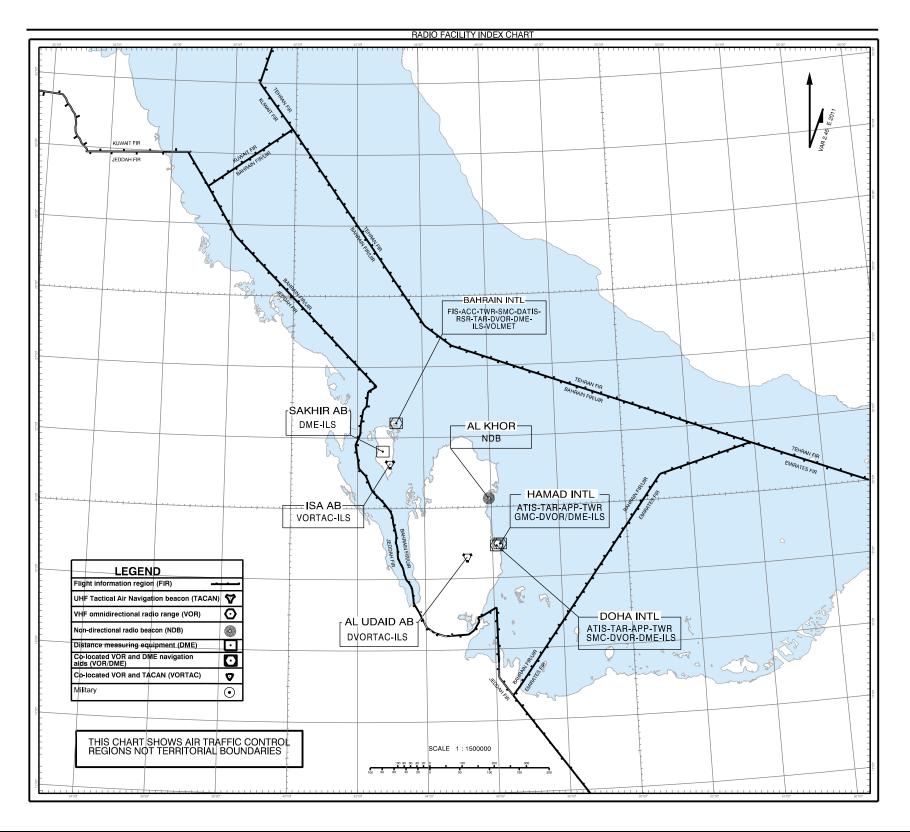

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

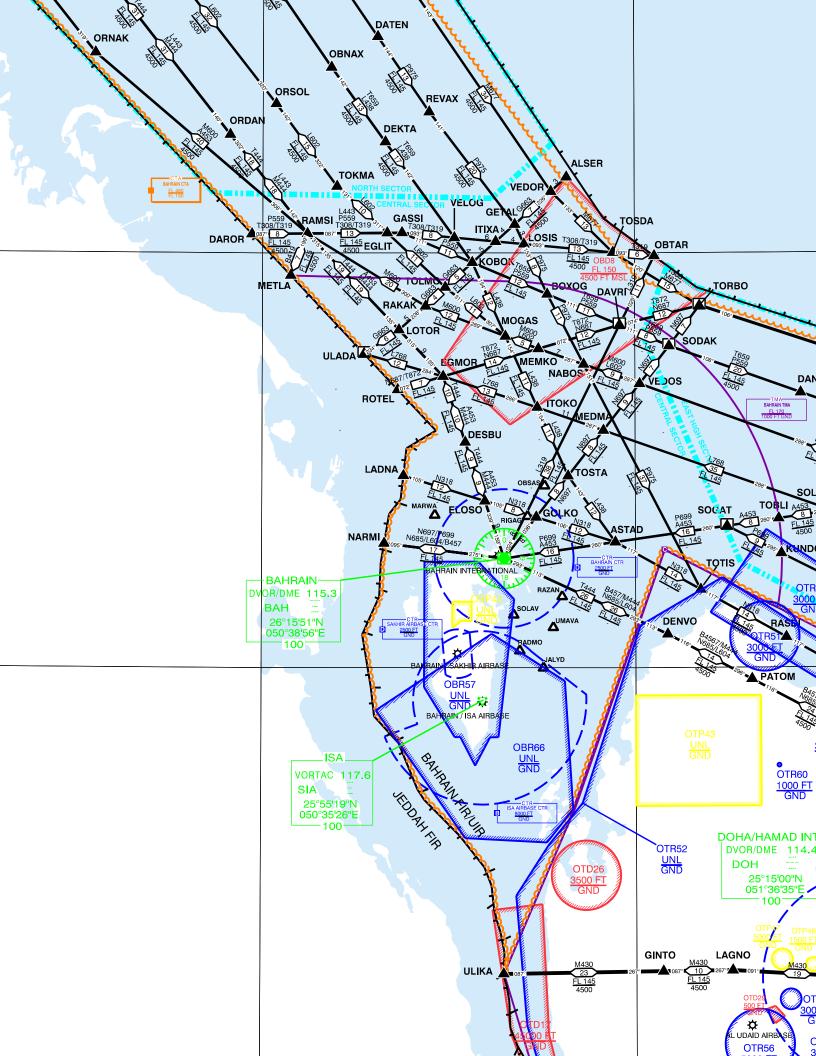


AIRAC AMDT 09/16 CIVIL AVIATION AFFAIRS

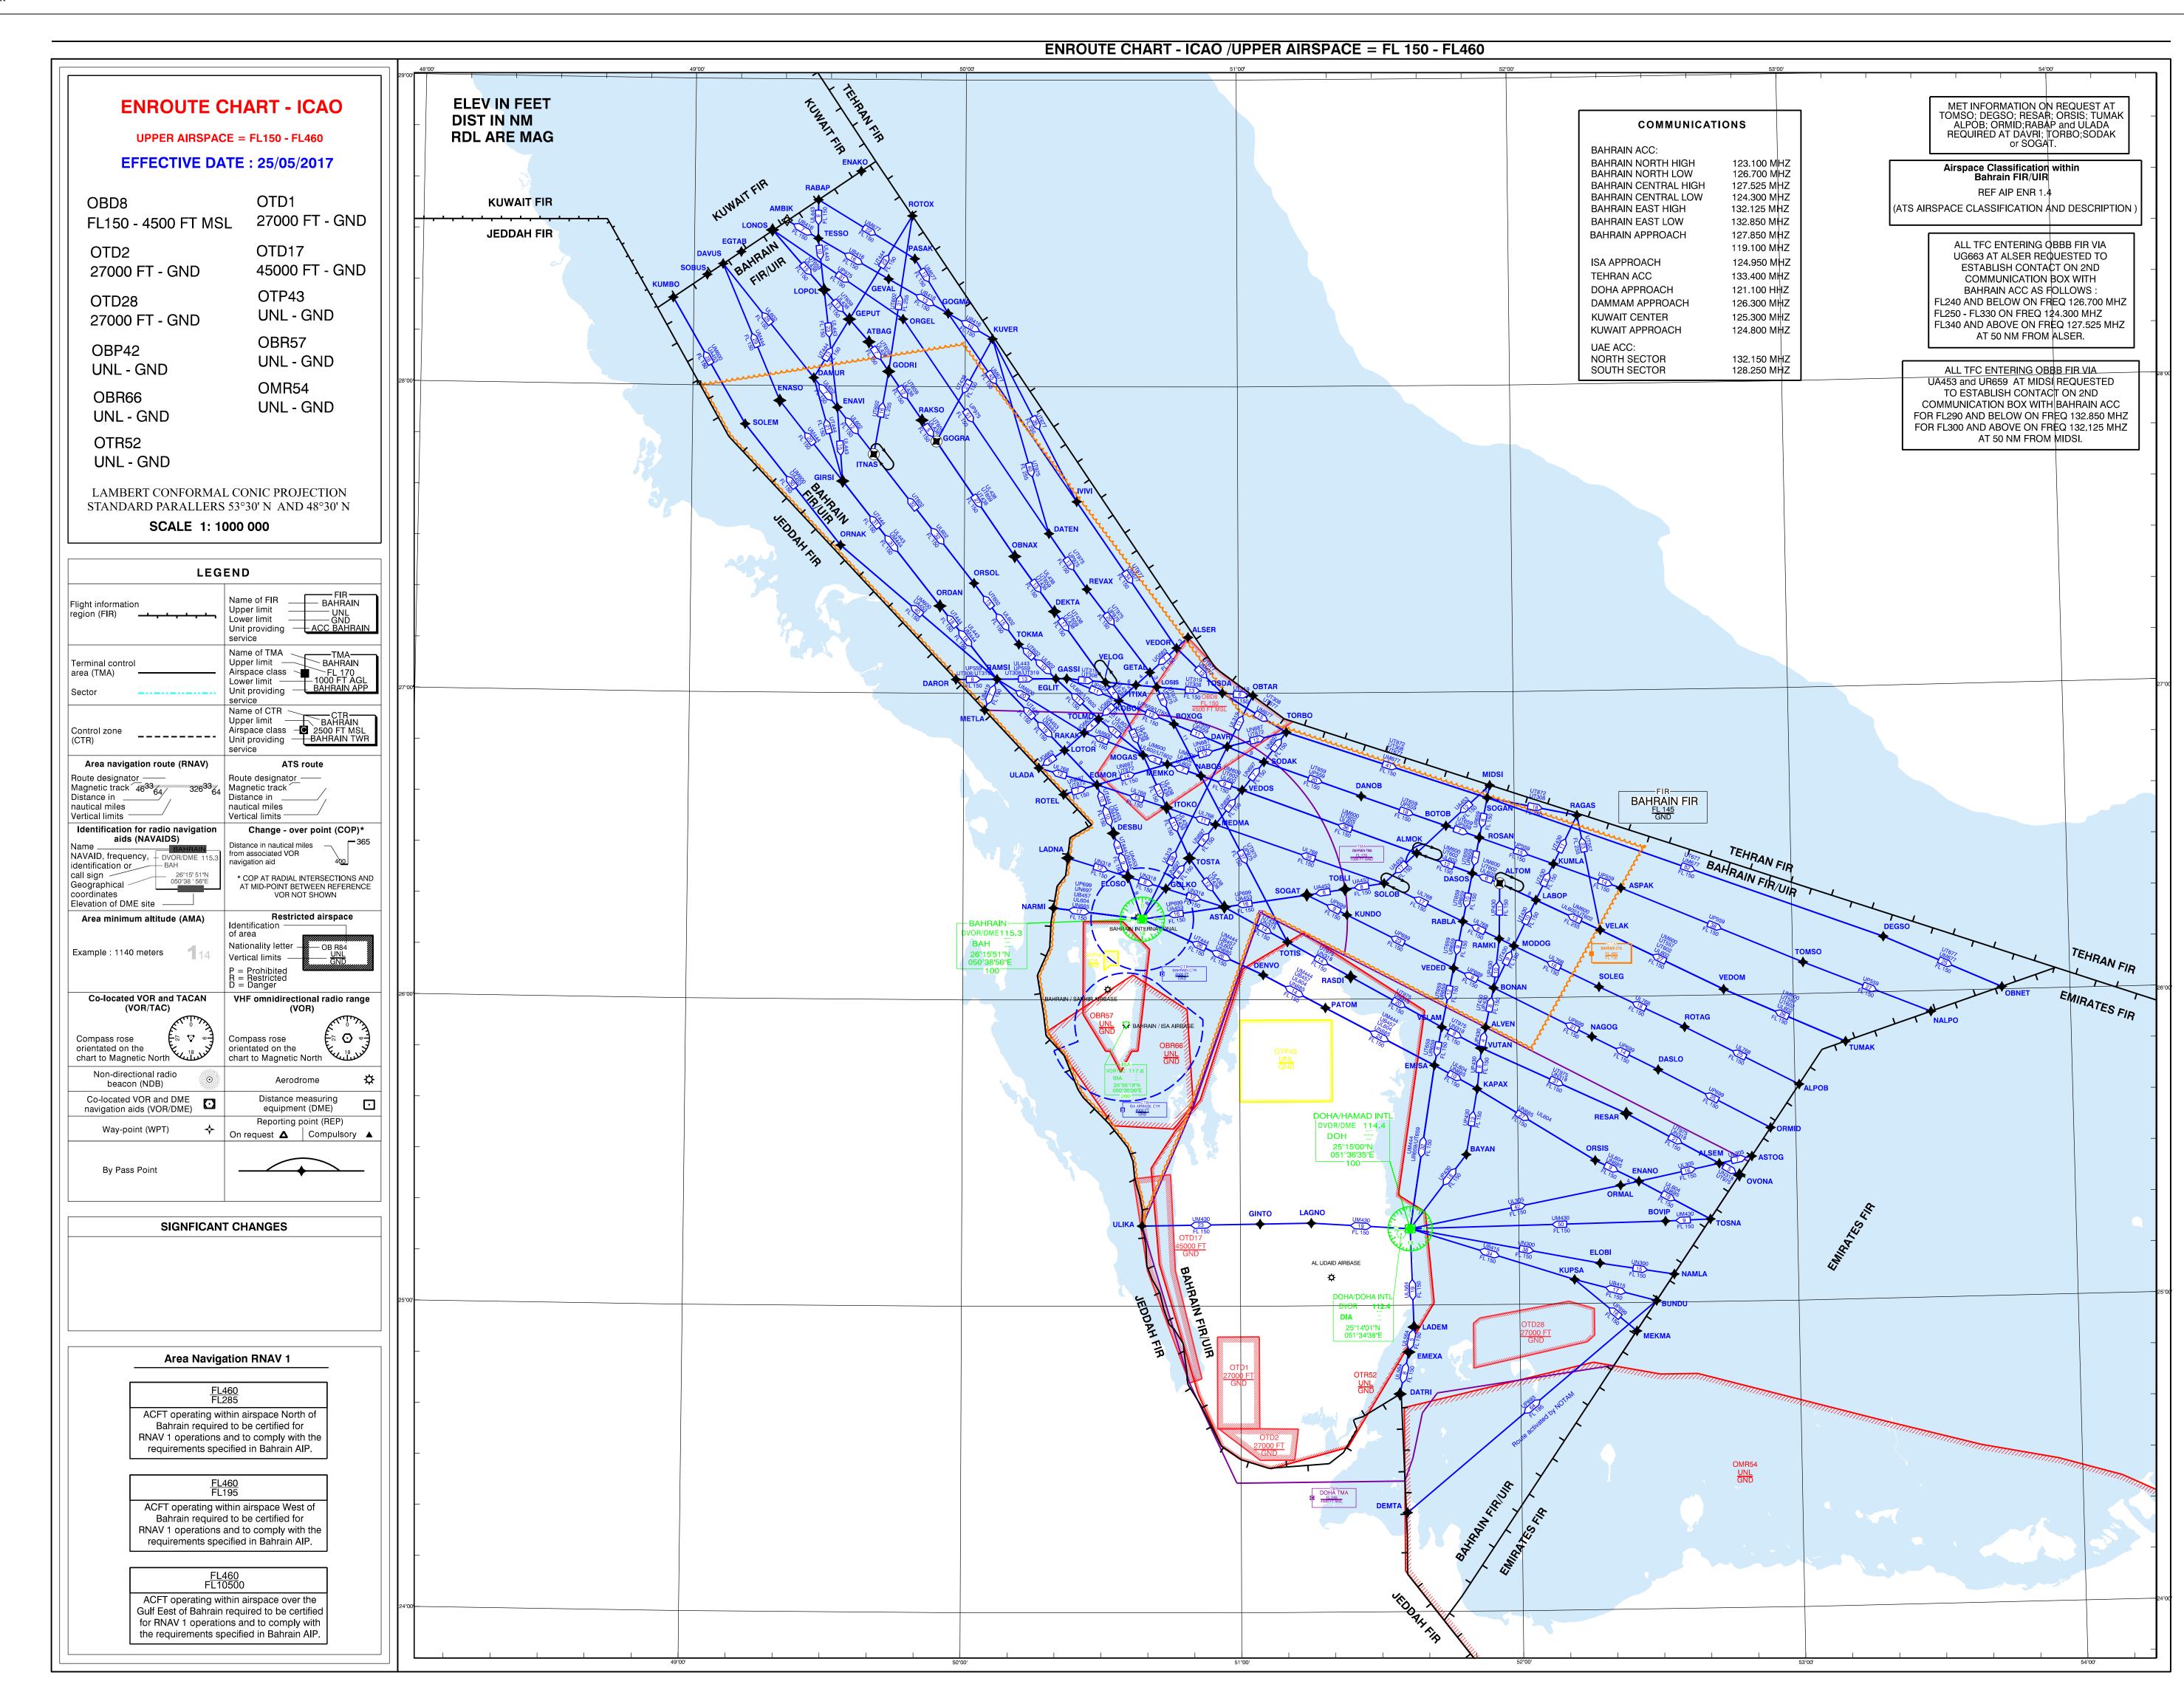

AIRAC AMDT 09/16 CIVIL AVIATION AFFAIRS



AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

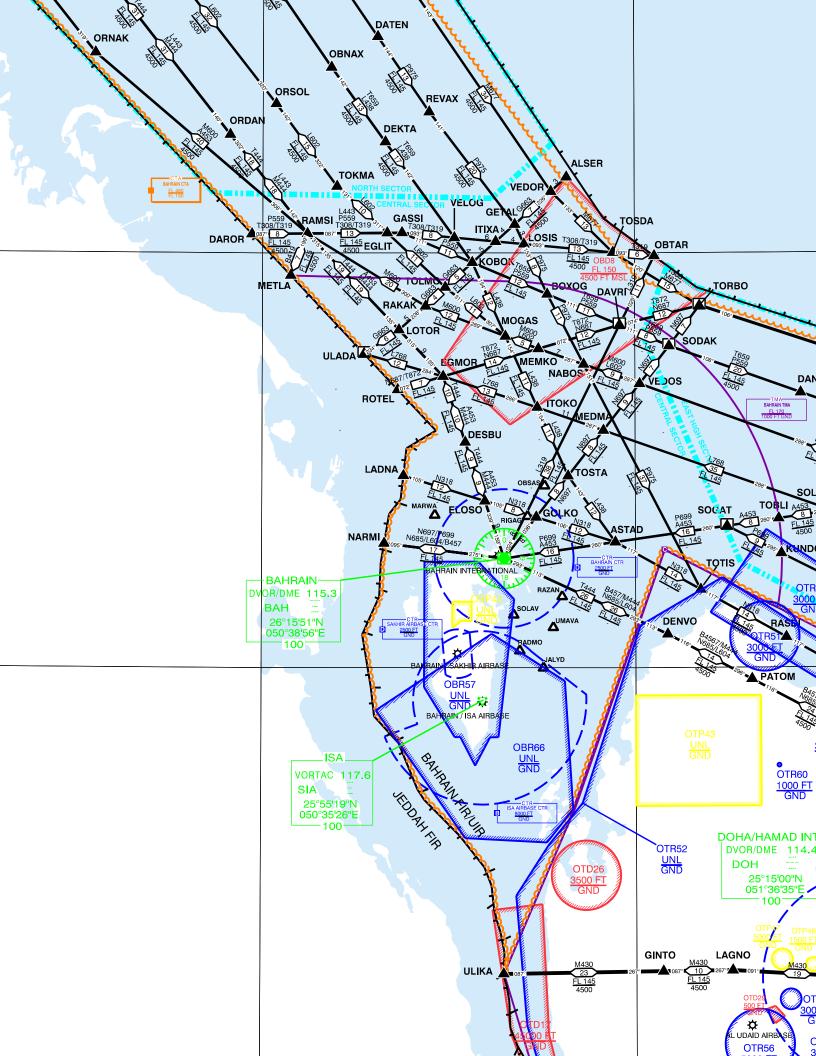

INTENTIONALLY BLANK

AIRAC AMDT 01/18 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR

AD 0.6-1
26 MAY 16

PART 3 - AERODROMES (AD)

AD 0.

AD 0.1 PREFACE

Not applicable.

AD 0.2 RECORD OF AIP AMENDMENTS

Not applicable.

AD 0.3 RECORD OF AIP SUPPLEMENTS

Not applicable.

AD 0.4 CHECKLIST OF AIP PAGES

Not applicable.

AD 0.5 LIST OF HAND AMENDMENTS TO THE AIP

Not applicable.

AD 0.6 TABLE OF CONTENTS

_		Page
AD 0.		
AD 0.1 AD 0.2 AD 0.3 AD 0.4 AD 0.5 AD 0.6 AD 1.2	PREFACE RECORD OF AIP AMENDMENTS RECORD OF AIP SUPPLEMENTS CHECKLIST OF AIP PAGES LIST OF HAND AMENDMENTS TO THE AIP TABLE OF CONTENTS RESCUE AND FIRE FIGHTING SERVICES AND SNOW PLAN	AD 0.6-1 AD 0.6-1 AD 0.6-1 AD 0.6-1 AD 0.6-1 AD 1.2-1
AD 2.	AERODROMES	
I	BAHRAIN INTERNATIONAL	
OBBI AD 2.1 OBBI AD 2.2 OBBI AD 2.3 OBBI AD 2.4 OBBI AD 2.5 OBBI AD 2.6 OBBI AD 2.7 OBBI AD 2.7 OBBI AD 2.8 OBBI AD 2.9 OBBI AD 2.10 OBBI AD 2.11 OBBI AD 2.12 OBBI AD 2.12 OBBI AD 2.13 OBBI AD 2.14 OBBI AD 2.15 OBBI AD 2.15 OBBI AD 2.16 OBBI AD 2.17 OBBI AD 2.17 OBBI AD 2.18 OBBI AD 2.19 OBBI AD 2.20 OBBI AD 2.21 OBBI AD 2.22 OBBI AD 2.23 OBBI AD 2.24	AERODROME LOCATION INDICATOR AND NAME AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA OPERATIONAL HOURS HANDLING SERVICES AND FACILITIES PASSENGER FACILITIES RESCUE AND FIRE FIGHTING SERVICES SEASONAL AVAILABILITY - CLEARING APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS AERODROME OBSTACLES METEOROLOGICAL INFORMATION PROVIDED RUNWAY PHYSICAL CHARACTERISTICS DECLARED DISTANCES APPROACH AND RUNWAY LIGHTING OTHER LIGHTING, SECONDARY POWER SUPPLY HELICOPTER LANDING AREA ATS AIRSPACE ATS COMMUNICATION FACILITIES RADIO NAVIGATION AND LANDING AIDS LOCAL AERODROME REGULATIONS NOISE ABATEMENT PROCEDURES FLIGHT PROCEDURES ADDITIONAL INFORMATION CHARTS RELATED TO AN AERODROME	AD 2-OBBI-1 AD 2-OBBI-1 AD 2-OBBI-1 AD 2-OBBI-1 AD 2-OBBI-2 AD 2-OBBI-2 AD 2-OBBI-2 AD 2-OBBI-3 AD 2-OBBI-3 AD 2-OBBI-5 AD 2-OBBI-6 AD 2-OBBI-6 AD 2-OBBI-7 AD 2-OBBI-7 AD 2-OBBI-7 AD 2-OBBI-7 AD 2-OBBI-8 AD 2-OBBI-8 AD 2-OBBI-8 AD 2-OBBI-10 AD 2-OBBI-11 AD 2-OBBI-12 AD 2-OBBI-13 AD 2-OBBI-13 AD 2-OBBI-13
I	BAHRAIN / SAKHIR AIRBASE	
OBKH AD 2.1 OBKH AD 2.2 OBKH AD 2.3	AERODROME LOCATION INDICATOR AND NAME AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA OPERATIONAL HOURS	AD 2-OBKH-1 AD 2-OBKH-1 AD 2-OBKH-1

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/16

_		Page
OBKH AD 2.4	HANDLING SERVICES AND FACILITIES	AD 2-OBKH-1
OBKH AD 2.5	PASSENGER FACILITIES	AD 2-OBKH-2
OBKH AD 2.6	RESCUE AND FIRE FIGHTING SERVICES	AD 2-OBKH-2
OBKH AD 2.7	SEASONAL AVAILABILITY - CLEARING	AD 2-OBKH-2
OBKH AD 2.8	APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA	AD 2-OBKH-2
OBKH AD 2.9	SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2-OBKH-2
OBKH AD 2.10	AERODROME OBSTACLES	AD 2-OBKH-3
OBKH AD 2.11	METEOROLOGICAL INFORMATION PROVIDED	AD 2-OBKH-3
OBKH AD 2.12	RUNWAY PHYSICAL CHARACTERISTICS	AD 2-OBKH-4
OBKH AD 2.13	DECLARED DISTANCES	AD 2-OBKH-4
OBKH AD 2.14	APPROACH AND RUNWAY LIGHTING	AD 2-OBKH-4
OBKH AD 2.15	OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2-OBKH-5
OBKH AD 2.16	HELICOPTER LANDING AREA	AD 2-OBKH-5
OBKH AD 2.17	ATS AIRSPACE	AD 2-OBKH-5
OBKH AD 2.18	ATS COMMUNICATION FACILITIES	AD 2-OBKH-6
OBKH AD 2.19	RADIO NAVIGATION AND LANDING AIDS	AD 2-OBKH-6
OBKH AD 2.20	LOCAL AERODROME REGULATIONS	AD 2-OBKH-7
OBKH AD 2.21	NOISE ABATEMENT PROCEDURES	AD 2-OBKH-8
OBKH AD 2.22	FLIGHT PROCEDURES	AD 2-OBKH-9
OBKH AD 2.23	ADDITIONAL INFORMATION	AD 2-OBKH-10
OBKH AD 2.24	CHARTS RELATED TO AN AERODROME	AD 2-OBKH-11

AIRAC AMDT 06/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 1.1-1
17 SEP 15

AD 1. AERODROMES / HELIPORTS - INTRODUCTION

AD 1.1 AERODROME / HELIPORT AVAILABILITY AND CONDITIONS OF USE

1.1.1 General conditions

1.1.1.1 The conditions under which aircraft may land, be parked, housed or otherwise be dealt with at the aerodromes under the control of the administrations of the Kingdom of Bahrain.

- a) The fees and charges for landing, parking or housing of aircraft, as notified, from time to time by the various administrations concerned shall be published in the AIP BAHRAIN FIR, or by NOTAM. Unless otherwise agreed in advance the administration concerned shall levy reasonable fees and charges, as determined from time to time, for services and / or supplies furnished by, or on behalf of the administration to aircraft any aerodrome under its control. Such fees and charges as referred to above shall accrue from day to day and be payable to the administration on demand.
- b) The administration shall have a lien on the aircraft, its parts and accessories, for such fees and charges as aforesaid.
- c) If payment of such fees and charges is not made to the administration within fourteen days after a letter demanding payment thereof has been sent by post to the registered owner of the aircraft, the administration shall be entitled to sell, remove destroy or otherwise dispose of the aircraft, and any of its parts and accessories, and to apply the proceeds from so doing to the payment of such fees and charges.
- d) Neither the particular administration nor any servant of agent of the government shall be liable for the loss of, or damage to, the aircraft, its parts of accessories or any property contained in the aircraft, however such loss or damage may arise, occurring whilst the aircraft is on any of the aerodromes under the control of a particular administration, or is in the course of landing or taking off at any such aerodrome, or of being removed or dealt with elsewhere, for the purposes of **AD 1.1.3** of these conditions.

1.1.1.2 Landings made other than at an international aerodrome / heliport or designated alternate aerodrome / heliport

If a landing is made elsewhere than at an international airport or a designated alternate airport the pilot - in - command shall report the landing as soon as possible to the health, customs and immigration authorities of the state in whose territory the aircraft has landed. This notification may be made through the air radio channels if this method of communication is available.

The pilot - in - command is responsible for ensuring that:

- a) If permission has not been granted to the aircraft at the previous landing, contact between other persons on the one hand and the passengers and crew on the other is avoided.
- b) That cargo, baggage and mail are not removed from the aircraft except as provided below.
- c) Any foodstuff of overseas origin, or any plant material, is not removed from the aircraft except where local food is unobtainable. All food refuse, including peelings, cores and stones of fruit, etc., must be collected and returned to the galley refuse container, the contents of which should not be removed from the aircraft except for hygiene reasons, in which case they must be destroyed by burning or deep burial.

1.1.1.3 Traffic of persons and vehicles on aerodrome

1.1.1.3.1 Demarcation of zones

The grounds of each aerodrome are divided into two zones:

- a) A Public zone comprising the part of the aerodrome open to the public;
- b) A restricted zone comprising the rest of the aerodrome.
- 1.1.1.3.2 Movement of persons
- 1.1.1.3.2.1 Access to the restricted zone is authorized only under conditions prescribed by the special rules governing the aerodrome.
- 1.1.1.3.2.2 The customs, police and health inspection offices and premises assigned to transit traffic are normally accessible only to passengers, to staff of public authorities and to airlines, and to authorized persons in the pursuit of their duty.
- 1.1.1.3.2.3 The movement of persons having access to the restricted zone of the aerodrome is subject to the conditions prescribed by the air regulations and the special rules laid down by the person responsible for the management of the airport.
- 1.1.1.3.3 Movement of vehicles
- 1.1.1.3.3.1 The movement of vehicles in the restricted zone is strictly limited to vehicles driven, or used by, persons carrying a traffic permit or an official card of admittance.
- 1.1.1.3.3.2 Drivers of vehicles, of whatever type, driving within the confines of the aerodrome must respect the direction of the traffic, the traffic signs and the posted speed limits, and generally comply with the provisions of the highway code and with the instructions given by the competent authorities.

1.1.1.3.4 Policing

Care and protection of aircraft, vehicles, equipment and goods for which the aerodrome facilities are used are not the responsibility of the state or any concessionaire, who cannot be responsible for loss or damage which is not incurred through action by them or their agents.

10 NOV 16

KINGDOM OF BAHRAIN

SPECIAL REGULATIONS FOR AIRPORT USE

1.1.1.4 Conditions applicable to the landing, parking, or storage of aircraft on aerodromes under the control of Civil Aviation **Affairs**

- 11141 An authorized official from Civil Aviation Affairs may at any time order an aircraft operator either to move a parked aircraft to another position or to remove it from the airport. Failure to comply with the order, within the period specified in it, will render the operator liable to a special charge, equivalent to five times the standard parking charge, for every day or part of a day during which aircraft remains in position after the period specified in the order has expired.
- 11142 It is mandatory for all aircraft arriving / departing from the Kingdom of Bahrain to employ the services of the Handling Agent.
- BAHRAIN INTERNATIONAL airport is a civilian airport and for reasons of safety, diversions to the airport by military aircraft shall 1.1.1.4.3 only be permitted under the following circumstances:
- 1. Diversion to the airport by military combat aircraft which are fully loaded (i.e. armed) shall not be permitted under any circumstances.
- 2. Military combat aircraft not loaded (i.e. unarmed) shall be permitted to divert to the airport in cases of a declared emergency and as a matter of last resort
- 3. Procedures for diversions by non combat military aircraft remain as at present.

In all cases the preferred division airport for BAHRAIN INTERNATIONAL airport should be BAHRAIN / ISA AIRBASE.

All military fixed wing tactical aircraft will not permitted to arrive to BAHRAIN INTERNATIONAL airport daily between the following timings: 1430 - 1630.

Enquiries should be made to:

Bahrain Airport Services (BAS)

TEL: +973 17321443 / +973 17321453

Telefax:+973 18335304 Telex: 8971 BASBA BN AFS: OBBIXHAX SITA: BAHKBXH

VHF AIR / GRD: 131.900 MHZ

Call sign: BAS OPERATIONS

1.1.1.4.5 Carriage of explosives, arms and ammunition

- 1.1.1.4.5.1 The carriage of explosives, arms and ammunition in aircraft arriving at, departing from, or in transit through BAHRAIN INTERNATIONAL airport is prohibited without prior permission from the Ministry of the Interior (see GEN 1.1)
- The prohibition stated in AD 1.1.1.4.3 does not apply to arms and ammunition which the State of Registry of the aircraft allows to be carried for the protection of persons on board the aircraft.

1.1.1.5 **Dangerous goods**

The carriage of dangerous goods in aircraft arriving at, departing from, or in transit through BAHRAIN INTERNATIONAL airport and Bahrain sovereign Airspace shall comply fully with, or be to no less a standard than that specified in, the latest edition of:

Government Legislation, Decree or Instruction.

ICAO Annex 18 to the Convention on International Aviation

ICAO Doc 9284 - AN / 905, Technical Instructions for the Safe Transport of Goods by Air.

Instructions and Notices issued by the Under Secretary for Civil Aviation.

1.1.2 Use of military air bases

Kingdom of Bahrain

General

Use of military air bases in the Kingdom of Bahrain with other than State registered aircraft may be made solely when prior permission has been obtained.

The use of military air bases as alternate aerodromes may likewise be made solely when prior permission thereto has been obtained.

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS AIP BAHRAIN FIR AD 1.1-3
2 MAR 17

BAHRAIN / ISA AIRBASE is designated as an emergency diversion aerodrome for BAHRAIN INTERNATIONAL airport.

A permission may at any time be withdrawn with immediate effect, should circumstances so require.

Submission of application

Application to use a military air base shall be submitted in writing well in advance of the intended flight to the Bahrain Defence Force General Headquarters.

The address is:

Bahrain Defence Force War Operation Room P.O. Box 245 Kingdom of Bahrain

Rules and conditions

Operations on the air base must be carried out in accordance with the rules and conditions stated below with due regard to such other conditions as may have been stipulated for each individual permission.

A flight plan shall be submitted for each flight. During operations in military airspace or at a military air base, the pilot - in - command shall closely adhere to any instruction given.

The Commander of the air base establishes the rules which are to be observed by flight crew members and passengers concerning security measures, traffic and stays at the air base.

Photographing from the air or on the ground is totally prohibited at all military bases.

Flight crew members, and ground personnel shall immediately report any violations.

Bahrain Defence Force shall not be liable for the theft, fire-, water or other damage to aircraft, their equipment, flight crew members, passengers, cargo, etc. caused by civil aircraft, flight crew members or passengers to Defence Force material, buildings and personnel within the area of an air base.

1.1.3 Low visibility procedures (LVP)

1.1.3.1 All taxi routes are available during (LVP) operations subject to ATC clearance.

1.1.4 Aerodrome operating minima

Promulgation of an aerodrome as available for Category II or Category III operations means that it is suitably equipped and that procedures appropriate to such operations have been determined and are applied when relevant.

Promulgation implies that at least the following facilities are available:

ILS - certificated to relevant performance category.

Lighting - suitable for Category promulgated.

RVR System - may be automatic or manned system for Category II; will be automatic system for Category III.

Special Procedures and safeguards will be applied during Category II and III operations. In general, these are intended to provide protection for aircraft operating in low visibilities and to avoid disturbance to the ILS signals.

Protection of ILS signals during Category II or III operations may dictate that pre- take-off holding positions are more distant from the runway than the holding positions used in good weather. Such holding positions will be appropriately marked and will display signs conforming to the specifications in Annex 14, Volume I on one or both sides of the taxiway; there may also be a stop bar of red lights. For aircraft taxing off the runway during Category III operations exit taxiway center line lights are colour coded to facilitate notification of runway vacation and the colour coding ends at the boundary of the ILS critical / Sensitive Area. Pilots are required to make a "Runway Vacated" call on R / T when the aircraft has colour code of part of exit taxiway centre line lights, due allowance being made for aircraft size to ensure that the entire aircraft is clear of the ILS critical / Sensitive Area.

In actual Category II or III weather conditions pilots will be informed by ATC of any unserviceabilities in the promulgated facilities so that they can amend their minima, if necessary, according to their operations manual. Pilots who wish to carry out a practice Category II or Category III approach are to request practice Category II (or Category III) approach on initial contact with Approach Control. For practice approaches there is no guarantee that the full safeguarding procedures will be applied and pilots should anticipate the possibility of resultant ILS signal disturbance.

1.1.5 Runway friction measuring

BAHRAIN INTERNATIONAL airport

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

Friction Measuring surveys are conducted at BAHRAIN INTERNATIONAL airport four times per year. The Friction Classification Survey Table is displayed here:

	Friction Classification Survey Table - BAHRAIN INTERNATIONAL airport						
1 2 3 4 5 6 7				8			
Equipment	Design object ice for New Runway Surfaces	Maintenance Planning Level	Minimum Friction Level	Test Water Depth mm (tolerance)	Test Speed kph (tolerance)	Tyre Pressure Psi (tolerance)	Tyre
Grip Tester	Above 0.80	0.53	0.43	1 mm (+ / - 5 %)	65 (+ / - 5)	20 (+/-1)	Type A 10 x 3.6 - 5

Friction measuring devices are not used at BAHRAIN INTERNATIONAL airport on a daily operational basis.

Whenever water is present on the runway, a description of the runway surface conditions on the centre half of the width of the runway, including the possible assessment of water depth, where applicable, should be made available using the following terms:

DAMP - the surface shows a change of colour due to moisture WET - the surface is soaked but there is no standing water WATER PATCHES - significant patches of standing water are visible FLOODED - extensive standing water is visible

1.1.6 Other information

NIL

AIRAC AMDT 12/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 1.2-1
26 MAY 16

AD 1.2 RESCUE AND FIRE FIGHTING SERVICES AND SNOW PLAN

1.2.1 Rescue and fire fighting services

At aerodromes approved for scheduled and / or non - scheduled traffic with aeroplanes carrying passengers, Rescue and Fire Fighting Services, and in some cases also Sea Rescue Services, are established in accordance with regulations for civil aviation.

Note: For heliports special rules will apply.

Information about whether there is a service or not and also the extent of the service is given on the relevant page for each aerodrome.

Scheduled or non - scheduled traffic with aeroplanes carrying passengers are not allowed to use aerodromes without Rescue and Fire Fighting Services.

Each individual service is categorised to the table shown below. Temporary changes will be published by NOTAM.

Rescue and fire fighting services		
Aerodrome Category	Amount of water in litres for Production of performance level B Foam	
7	12100	
8	18200	
9	24300	
10	32300	

1.2.2 Snow Plan

The local climate precludes the requirement for a snow plan.

1.2.3 De-watering Plan at Bahrain International Airport

Duration: Annually between 1st October until 1st May of the following year

During winter season, weather conditions usually get so unsettled to an extent that it may be unforeseeable practice to predict the weather condition with respect to rain and when and the amount of rain that could fall during then, as clouds would rapidly and largely start to develop at the area around Bahrain International Airport at which rain between shows to thunderstorms may be experienced. Therefore, it became essentially important to take all precautionary measures to ensure that a safe yet uninterrupted conduct of air navigation is implemented and is maintained at the airport throughout the whole rainy season.

In this context, Bahrain Airport Company for being the airport operator, has identified certain concourse locations which standing water and associated patches are believed to accumulate. Accordingly a number of nearly 10 pumps will be at the runway strip at a symmetrical distance of 135M from the runway centre-line with a max HGT of 1.5M, such pumps will immediately allow De-watering process to take place off the runway strip.

The attached diagram is clearly depicting various locations of the pumps within the runway strip with arrows pointing to either the gutter or the manhole where the water should drain.

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/16



AIP BAHRAIN FIR

AD 1.3-1
17 SEP 15

AD 1.3 INDEX TO AERODROMES AND HELIPORTS

Aerodrome/heliport name and ICAO location indicator	Type of traffic permitted to use the aerodrome/heliport			Reference to AD Section	
ICAO location indicator	International- National (INTL-NTL)	IFR-VFR	S = Scheduled NS = Non-Scheduled P = General Aviation, Military and other	and remarks	
1	2	3	4	5	
Aerodromes					
BAHRAIN INTERNATIONAL OBBI	INTL, NTL	IFR, VFR	S, NS, P	AD 2-OBBI	
BAHRAIN / ISA AIRBASE OBBS	NIL	IFR, VFR	NIL	AD 2-OBBS	
BAHRAIN / SAKHIR AIRBASE OBKH	NTL	IFR, VFR	S, NS	AD 2-OBKH	



AIP BAHRAIN FIR

AD 1.4-1
17 SEP 15

AD 1.4 GROUPING OF AERODROMES / HELIPORTS

The criteria applied in grouping aerodromes / heliports for the provision of information in this AIP is as follows:

Primary / major international aerodrome / heliport

Aerodrome / heliport of entry and departure for international air traffic, where all formalities concerning customs, immigration, health, animal and plant quarantine and similar procedures are carried out and where air traffic services are available on a regular basis.

Secondary / other international aerodrome / heliport

Other aerodrome / heliport available for entry or departure of international air traffic, at which the formalities of customs, immigration, health and similar procedures and air traffic services are made available on a restricted basis to flights, with prior approval only.

National aerodrome / heliport

Aerodrome / heliport available only for domestic air traffic, including those military aerodromes / heliports where civil air traffic is allowed under certain conditions.



AIP BAHRAIN FIR

AD 1.5-1
17 SEP 15

AD 1.5 STATUS OF CERTIFICATION OF AERODROMES

Aerodrome Name Date of Certification		Validity of Certification	Remarks
Location Indicator			
1	2	3	4
BAHRAIN INTERNATIONAL	15 JULY 2011	3 years	
OBBI	15 JULY 2014	5 years	Certified by BCAA



AIP BAHRAIN FIR

AD 2-OBBI-1
26 APR 18

AD 2. AERODROMES

OBBI AD 2.1 AERODROME LOCATION INDICATOR AND NAME

OBBI - BAHRAIN INTERNATIONAL

OBBI AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	261615N 0503801E Mid - point of RWY on CL
2	Direction and distance from (city)	3.3 NM NE of Manama
3	Elevation/Reference temperature	6 FT / 38° C
4	Geoid undulation at AD ELEV PSN	-83.18 FT
5	MAG VAR/Annual change	2°43 E (2016) / 3' per year
6	AD operator, address, telephone, telefax, e-mail address, AFS and website address	Undersecretary for Civil Aviation P.O. Box 586 Kingdom of Bahrain TEL: +973 17321100 Telefax:+973 17339060 AFS: OBBIYAYX
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	

OBBI AD 2.3 OPERATIONAL HOURS

1	AD Operator	SUN - THU 04:00 - 11:15
2	Customs and immigration	H24
3	Health and sanitation	H24
4	AIS Briefing Office	H24
5	ATS Reporting Office (ARO)	H24
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	H24
9	Handling	H24
10	Security	H24
11	De-icing	NIL
12	Remarks	NIL

OBBI AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	BAHRAIN AIRPORT SERVICES
2	Fuel/oil types	Fuel: AVGAS 100 LL by prior arrangement with BAFCO (Bahrain Aviation Fuelling Company) TEL: +973 17329440 FAX: +973 17910925 Jet A1available to contract customers or on cash basis only Oil: Mobil oil Jet 2
3	Fuelling facilities/capacity	Jet A1 Bays 3 - 7, E1 - E4 and 11 - 22; hydrant Bays 41 - 46, 51 - 58, 61 - 64 and 71 - 75; Bowser AVGAS - Bowser only
4	De-icing facilities	NIL
5	Hangar space for visiting aircraft	NIL
6	Repair facilities for visiting aircraft	Gulf Air

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

7	Remarks	Handling Services available H24 from Bahrain Airport Services (BAS) Private / Business Aircraft shall carry a tow bar compliant to its type
		of aircraft

OBBI AD 2.5 PASSENGER FACILITIES

1	Hotels	In Manama and at Airport
2	Restaurants	At Airport
3	Transportation	Taxis and courtesy coaches to Hotels
4	Medical facilities	First aid; Ambulance; Hospitals in Manama
5	Bank and Post Office	At airport; At airport
6	Tourist Office	At airport
7	Remarks	NIL

OBBI AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 10
2	Rescue equipment	1 rescue boat available from airport and 4 from coastguard
3	Capability for removal of disabled aircraft	Limited
4	Remarks	Trained personal: 18 per shift; Fire vehicles: 3 vehicles, 2 with 13000 L of capacity each, 1 with 12000 L of capacity

OBBI AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Types of clearing equipment	NIL
2	Clearance priorities	NIL
3	Remarks	NIL

OBBI AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron designation, surface and strength	MAIN: Concrete, PCN 69 / R / B / W / T MIDDLE: Concrete, PCN 79 / R / C / W / T EASTERN: Concrete, PCN 89 / R / B / W / T EASTERN: Asphalt, PCN 22 / F / B / X / T (extension) WESTERN A: Concrete, PCN 83 / R / C / W / T WESTERN B: Concrete, PCN 83 / R / C / W / T EXECUTIVE: Concrete, PCN 69 / R / B / W / T CARGO: Concrete, PCN 69 / R / B / W / T NORTHERN: Asphalt, PCN 61 / F / A / W / T MENA: Concrete, PCN 24 / R / B / X / T
---	---	---

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 2-OBBI-3 2 MAR 17

2	Taxiway designation, width, surface and strength	TWY A: 28.5 M, Asphalt, PCN 81/F/C/X/T TWY B: 23 M, Concrete, PCN 109/R/D/W/T TWY C: 23 M, Concrete, PCN 109/R/D/W/T TWY D: 23 M, Concrete, PCN 109/R/D/W/T TWY E: 23 M, Concrete, PCN 109/R/D/W/T TWY FEAST, 23 M, Concrete, PCN 109/R/D/W/T TWY F WEST, 23 M, Concrete, PCN 109/R/D/W/T TWY F WEST, 23 M, Concrete, PCN 109/R/D/W/T TWY G: 23 M, Concrete, PCN 109/R/D/W/T TWY H: 28.5 M, Asphalt, PCN 81/F/C/X/T TWY J: 23 M, Asphalt, PCN 22/F/B/X/T Code D 37/F/B/X/T Code E TWY K: 23 M, Concrete, PCN 109/R/D/W/T TWY L: 26 M, Asphalt, PCN 81/F/C/X/T TWY M: 23 M, Concrete, PCN 109/R/D/W/T TWY N: 23 M, Concrete, PCN 109/R/D/W/T TWY P: 23 M, Concrete, PCN 109/R/D/W/T TWY P: 23 M, Concrete, PCN 109/R/D/W/T TWY C: 23 M, Concrete, PCN 109/R/D/W/T TWY S: 44 M, Asphalt, PCN 81/F/B/W/T TWY T: 42 M, Asphalt, PCN 82/F/B/W/T TWY V: 42 M, Asphalt, PCN 82/F/B/W/T TWY Y: 30 M, Asphalt, PCN 82/F/B/W/T TWY Y: 23 M, Concrete PCN 109/R/D/W/T
3	Altimeter checkpoint location and elevation	Bays 11 - 19: 8 FT Bays 42 - 46: 6 FT
4	VOR checkpoints	VOR: Holding point TWY A - 296R BAH 2.0 NM, Main TWY abeam TWY M - 291R BAH 1.1 NM
5	INS checkpoints	See ACFT Parking / Docking charts
6	Remarks	NIL

OBBI AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs at all intersections with TWY and RWY at all holding positions. Taxi guide lines at all aprons. Visual Docking Guidance System (VDGS) installed on stands: MAIN APRON 11 - 20, MIDDLE APRON 41 - 44, CARGO APRON 3 - 7, EXECUTIVE APRON E1 - E4, EASTERN APRON A28 - 36 and 81 - 88.
2	RWY and TWY markings	RWY 12L / 30R: designation, THR, Displaced THR, TDZ, CL, Edges marked and lighted RWY 12R / 30L: designation, THR, Displaced THR, TDZ, CL, Edges marked and Displaced THR & Edges lighted TWY: CL, holding positions at all TWY/RWY intersections, marked and lighted (except TWY Y).
3	Stop bars	Where appropriate, manually controlled by TWR.
4	Remarks	See also Aerodrome Ground Movement Chart for taxiing guidance. Road Holding positions to RWY: Reflective signs are available.

OBBI AD 2.10 AERODROME OBSTACLES

	In appro	ach/TKOF areas		In circling area and at AD			
		1		2			
Obstacle identification or designation	RWY NR/ Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle Obstacle type Coordinates identification Elevation or designation Markings/LGT			inates
а	b	С	d	а	b	c	•
OB-1025	12L APCH	Lamppost 11.41 M, 37.43 FT NIL / NIL	261658.36N 0503658.50E	OB-1127	Comms Mast 41.29 M , 135.46 FT NIL / NIL	261704.32N	0503745.26E

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

	In appro	ach/TKOF areas		In circling area and at AD				
		1		2				
Obstacle identification or designation	RWY NR/ Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle identification or designation	Obstacle type Elevation Markings/LGT	Coord	dinates	
а	b	С	d	а	b		С	
OB-2273	12L APCH 12R TKOF	Building 16.27 M, 53.38 FT NIL / NIL	261654.76N 0503706.50E	OB-1146	ATC Dipole 53.56 M, 175.72 FT NIL / NIL	261600.98N	0503751.70E	
OB-1234	12L TKOF	ILS FFM 7.86 M, 25.79 FT NIL / NIL	261534.71N 0503910.92E	OB-1209	Comms Mast 40.85 M , 134.02 FT NIL / NIL	261626.78N	0503856.76E	
OB-2130	12L TKOF	Lamppost 12.46 M, 40.88 FT NIL / NIL	261535.00N 0503920.39E	OB-1213	Comms Mast 36.48 M, 119.68 FT NIL / NIL	261523.53N	0503857.43E	
OB-1104	12L	Lamppost 12.92 M, 42.39 FT NIL / NIL	261654.60N 0503705.60E	OB-1295	Comms Mast 56.15 M , 184.22 FT NIL / NIL	261605.12N	0503649.33E	
OB-1105	12L	Lamppost 12.33 M, 40.45 FT NIL / NIL	261652.95N 0503708.24E	OB-1321	Power Stn Chimney 68.21 M, 223.78 FT NIL / NIL	261306.68N	0503932.70E	
OB-1106	12L	Lamppost 12.40 M, 40.68 FT NIL / NIL	261652.55N 0503709.23E	OB-2011	Water Tower 46.32 M 151.97 FT NIL / NIL	261650.15N	0503833.33E	
OB-1107	12L	Lamppost 12.32 M, 40.42FT NIL / NIL	261652.24N 0503710.26E	OB-2024	Comms Mast 39.99 M, 131.2 FT NIL / NIL	261611.61N	0503915.02E	
OB-1109	12L	Lamppost 12.20 M, 40.03FT NIL / NIL	261652.06N 0503711.30E	OB-2072	Building 77.30 M, 253.61 FT NIL / NIL	261725.96N	0503954.66E	
OB-1115	12L	Tree 7.50 m, 24.61 FT NIL / NIL	261650.53N 0503711.82E	OB-2078	Crane (T) 95.81 M, 314.33 FT NIL / NIL	261704.89N	0503951.69E	
OB-2269	12L	Building 18.62 M, 61.09 FT NIL / NIL	261657.46N 0503704.07E	OB-2165	Crane (T) 191.90 M, 629.59 FT NIL / NIL		0503633.69E	
OB-2270	12L	Building 18.65 M, 61.19 FT NIL / NIL	261657.24N 0503704.26E	OB-2166	Crane (T) 201.55 M, 661.25 FT NIL / NIL	261324.31N	0503632.51E	
OB-2272	12L	Building 17.59 M, 57.71 FT NIL / NIL	261655.33N 0503707.41E	OB-2233	Building 82.29 M, 269.98 FT NIL / NIL	261445.33N	0503606.04E	
OB-5115	12L	Mobile Obstacle 6.47 M, 21.23 FT NIL / NIL	261651.07N 0503710.26E	OB-2235	Crane (T) 252.40 M, 828.07 FT NIL / NIL	261427.54N	0503421.34E	
OB-5116	12L	Mobile Obstacle 6.38 M, 20.93 FT NIL / NIL	261650.35N 0503711.51E	OB-2240	Financial Harbour Building 266.57 M, 874.56 FT NIL / NIL	261415.86N	0503421.56E	
OB-1018	30R TKOF	Lamppost 11.57 M, 37.96 FT NIL / NIL	261659.85N 0503651.62E	OB-2241	Financial Harbour Building 266.74 M, 875.12 FT NIL / NIL	261415.89N	0503427.61E	
OB-1048	30R TKOF	Lamppost 11.52 M, 37.79 FT NIL / NIL	261653.00N 0503646.81E	OB-2242	WTC Building 246.81 M, 809.73 FT NIL / NIL	261422.26N	0503453.85E	

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

	In appro	ach/TKOF areas		In circling area and at AD				
		1		2				
		Obstacle identification or designation	Obstacle type Elevation Markings/LGT	Coord	dinates			
а	b	С	d	а	b		С	
OB-1197	30R	DVOR Monitor 8.90 M, 29.2 FT NIL / NIL	261547.41N 0503901.79E	OB-2243	WTC Building 247.07 M, 810.59 FT NIL / NIL	261421.81N	0503453.14E	
OB-1247	12R TKOF	Tree 10.46 M, 34.32 FT NIL / NIL	261527.67N 0503916.88E	OB-2249	Building Antenna 206.60 M, 677.81 FT NIL / NIL	261346.40N	0503331.13E	
OB-1248	12R TKOF	Tree 9.62 M, 31.56 FT NIL / NIL	261527.23N 0503916.61E	OB-2250	Building Antenna 206.51 M, 677.52 FT NIL / NIL	261350.69N	0503331.27E	
OB-1272	12R TKOF	Lamppost 8.19 M, 26.87 FT NIL / NIL	261523.70N 0503909.89E	OB-2261	Building Antenna 213.23 M, 699.56 FT NIL / NIL	261412.06N	0503259.14E	
OB-2121	12R TKOF	Lamppost 16.64 M, 54.59 FT NIL / NIL	261516.53N 0503924.54E	OB-2299	Flag Pole 52.35 M, 171.75 FT NIL / NIL	261556.95N	0503545.28E	
OB-2122	12R TKOF	Lamppost 16.58 M, 54.4 FT NIL / NIL	261516.95N 0503922.10E	OB-2309	Building 52.09 M, 170.9FT NIL / NIL	261547.74N	0503545.31E	
OB-2144	12R TKOF	Lamppost 11.72 M, 38.45 FT NIL / NIL	261526.28N 0503920.36E					
OB-2145	12R TKOF	Lamppost 11.86 M, 38.91FT NIL / NIL	261525.34N 0503920.08E					
OB-5206	12R TKOF	Mobile Obstacle 6.45 M, 21.16 FT NIL / NIL	261530.03N 0503913.81E					
OB-5761	12R TKOF	Mobile Obstacle 6.27 M, 20.57 FT NIL / NIL	261526.99N 0503905.27E					
OB-1093	30L TKOF	Apron Light 23.14 M, 75.92 FT NIL / NIL	261633.28N 0503707.18E					
OB-1094	30L	Apron Light 23.19 M, 76.08 FT NIL / NIL	261634.49N 0503708.04E					
OB-1095	30L TKOF	Apron Light 15.14 M, 49.67 FT NIL / NIL	261635.67N 0503708.88E					
OB-1213	30L	Comms Mast 36.48 M, 119.68 FT NIL / NIL	261523.53N 0503857.43E					
OB-5760	30L	Mobile Obstacle 6.21 M, 20.37 FT NIL / NIL	261530.23N 0503859.66E					

OBBI AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	BAHRAIN MET. See also GEN 3.5.1.4
---	-----------------------	-----------------------------------

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

AD 2-OBBI-2 MAR 17

2	Hours of service MET Office outside hours	H24. See also GEN 3.5.1.4 NIL
3	Office responsible for TAF preparation Periods of validity	BAHRAIN MET HR 30
4	Trend forecast Interval of issuance	Trend 1/2 HR
5	Briefing/consultation provided	Personal consultation, partial self briefing, telephone to Forecaster. See also GEN 3.5.1.5
6	Flight documentation Language(s) used	Charts, abbreviated plain language text English
7	Charts and other information available for briefing or consultation	S, U25, P25 (other levels on request), T, SWH (East & West), SWM (MID), TB (Gulf sector winds). See also GEN 3.5.1.5
8	Supplementary equipment available for providing information	Telefax, Self briefing terminal. See also GEN 3.5.1.5
9	ATS units provided with information	BAHRAIN TWR, APC, ACC, RCC
10	Additional information (limitation of service, etc.)	See GEN 3.5.1

OBBI AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE & MAG BRG	Dimensions of RWY(M)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
12L	123° / 121°	3964 x 60	66 / F / B / X / U Asphalt between landing THRs 79 / R / C / W / U Concrete first 307 M	Landing THR: 261644.33N 0503710.28E THR end: 261649.69N 0503701.01E -82.79 FT	7.6 FT
30R	303° / 301°	3964 x 60	66 / F / B / X / U Asphalt between landing THRs 79 / R / C / W / U Concrete first 307 M	Landing THR: 261545.62N 0503852.03E THR end: 261540.25N 0503901.32E -83.09 FT	7.42 FT
12R	123° / 121°	2530 x 45	66 / F / B / W / T Asphalt	Landing THR: 261610.74N 0503755.62E THR end: 261616.13N 0503746.28E -82.33 FT	8.13 FT
30L	303° / 301°	2530 x 45	66 / F / B / W / T Asphalt	Landing THR: 261533.91N 0503859.44E THR end: 261531.79N 0503903.10E -83.69 FT	6.84 FT

Note: RWY 12R / 30L is approved as a backup RWY. Approaches to land or take off shall not be planned. RWY 12R / 30Lwill be assigned by ATC in exeptional circumstances.

Slope of RWY-SWY		Slope of RWY-SWY SWY dimensions (M)		CWY dimensions (M) Strip dimensions (M)		OFZ	Remarks
		8	9	10	11	12	
12L	0.0%	NIL	NIL	NIL	4084 x 300	Yes	Non load bearing shoulders 8 M; RWY is liable to be slippery when wet
30R	0.0%	NIL	NIL	NIL	4084 x 300	Yes	Non load bearing shoulders 8 M; RWY is liable to be slippery when wet

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR

AD 2-OBBI-7
2 MAR 17

Slope of RWY-SWY		Slope of RWY-SWY SWY dimen		CWY dimensions (M)	Strip dimensions (M)	OFZ	Remarks			
7		8	9	10	11	12				
12R	0.0%	NIL	NIL	60 x 150	2650 x 150	No	Non load bearing shoulders 7.5 M			
30L	0.0%	NIL	NIL	600 x 150	2650 x 150	No	Non load bearing shoulders 7.5 M			
Note: S	Note: Standard RESA 240 M available for RWY 12L and 30R									

OBBI AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
12L	3964	3964	3964	3657	NIL
30R	3964	3964	3964	3657	NIL
12R	2530	2590	2530	2222	NIL
30L	2530	3130	2530	2410	NIL

OBBI AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	THR LGT colour WBAR	VASIS (MEHT) PAPI	TDZ, LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour INTST	RWY End LGT colour WBAR	SWY LGT LEN (M) colour	Remarks
1	2	3	4	5	6	7	8	9	10
12L	ICAO CAT II precision approach lighting sys- tem 900 M LIH	Green	PAPI LEFT 3° 67.15FT	900 M	White LIH 3964 M; 30 M white; 3000 M - 3600 M red / white; from 3600 M red LIH	White LIH 3964 M; 60 M; last 600 M yellow	Red	NIL	NIL
30R	ICAO CAT II precision approach lighting sys- tem 900 M LIH	Green	PAPI LEFT 3° 67.15 FT	900 M	White LIH 3964 M; 30 M white; 3000 M - 3600 M red / white; from 3600 M red LIH	White LIH 3964 M; 60 M; last 600 M yellow	Red	NIL	NIL
12R	Simple approach lighting system (for non-instrument RWY) 420 M	Green	PAPI LEFT 3° 70.4 FT	NIL	NIL	White LIH 2530 M; 60 M; last 600 M yellow	Red	NIL	NIL
30L	Simple approach lighting system (for non-instrument RWY) 420 M	Green	PAPI LEFT 3° 70.4 FT	NIL	NIL	WHITE LIH 2530 M; 60 M; last 600 M yellow	Red	NIL	NIL

Note: RWY incursion lights (wig wag) installed at all TWY / RWY intersections 2.6 M from TWY edge. Height 65 CM..

CIVIL AVIATION AFFAIRS AIRAC AMDT 03/17

OBBI AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and operational hours	NIL
2	LDI location and LGT Anemometer location and LGT	NIL 350 M WSW of THR 30R; lighted
3	TWY lighting	Green CL , Runway intersections
4	Secondary power supply/switch-over time	Secondary power supply to all AD Lighting; 5 seconds
5	Remarks	Apron: Blue Apron edge, TWY "j" is a solar powered blue edge light.

OBBI AD 2.16 HELICOPTER LANDING AREA

1	Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	TLOF and/or FATO elevation M/FT	NIL
3	TLOF and FATO area dimensions, surface, strength, marking	NIL
4	True BRG of FATO	NIL
5	Declared distance available	NIL
6	APP and FATO lighting	NIL
7	Remarks	As directed by ATC

OBBI AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	BAHRAIN CTR: A Circle, radius 10 NM centered at BAH ARP (261615N 0503801E).
2	Vertical limits	SFC - 2500 FT
3	Airspace classification	D
4	ATS unit call sign Language(s)	BAHRAIN TOWER English
5	Transition altitude	13000FT
6	Hours of applicability	H24
7	Remarks	New ATC Control Tower at 261601.3N 0503751.5E top elevation 53 M (174 FT) AMSL located aprox DIST / MAG BRG at 210 ° / 500 M (0.3 NM) from ARP, penetrates Obstacle Limitation Surfaces

OBBI AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Channel	Hours of operation	Remarks
1	2	3	4	5
APP / TAR	BAHRAIN APPROACH	127.85 MHZ	H24	
		234.95 MHZ	H24	Alternate Frequency
TWR	BAHRAIN TOWER	118.5 MHZ	H24	
		296.025 MHZ	H24	Alternate Frequency
SMC	BAHRAIN GROUND	121.85 MHZ	H24	
A/G	BAHRAIN RADIO	2992 KHZ	H24	
		5658 KHZ	H24	

AIRAC AMDT 01/18 CIVIL AVIATION AFFAIRS

Service designation	Call sign	Channel	Hours of operation	Remarks
1	2	3	4	5
		5667 KHZ	H24	
		8918 KHZ	H24	
		13288 KHZ	H24	
		13312 KHZ	H24	
D - ATIS	BAHRAIN INFORMATION	127.2 MHZ	H24	
VOLMET	BAHRAIN VOLMET	128.8MHZ	H24	

OBBI AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, CAT of ILS/MLS (For VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates		Elevation of DME transmitting antenna	Remarks
1	2	3	4		5	6	7
DVOR (2°E / 1996)	BHR	111.80 MHZ	H24	261530.00N	0503919.18E		121 MAG .48NM FROM THR RWY 30R
DME	BHR	55X	H24	261530.41N	0503919.53E	32.83 FT	121 MAG .48NM FROM THR RWY 30R
ILS LOC RWY 12L CAT I (2°E / 1996)	IBIB	111.5 MHZ	H24	261534.76N	0503910.80E		NIL
GP RWY 12L		332.9 MHZ	H24	261641.91N	0503722.43E		Angle 3°, RDH 55 FT
ILS DME RWY 12L	IBIB	CH 52 X	H24	261641.92N	0503722.47E	42 FT	Co - located with GP
ILS LOC RWY 30R CAT I (2°E / 1996)	IBIA	110.3 MHZ	H24	261655.66N	0503650.62E		301° MAG 2.18 NM from THR RWY 30R
GP RWY 30R		335 MHZ	H24	261555.16N	0503844.83E		Angle 3°, RDH 55 FT
ILS DME RWY 30R	IBIA	CH 40 X	H24	261555.16N	0503844.83E	42 FT	Co - located with GP

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

OBBI AD 2.20 LOCAL AERODROME REGULATIONS

(i) Operations on the Eastern Apron

(1) Stands 28-36

Following are the source of ground power available and shall be provided accordingly:

- 1. FEGP when serviceable
- 2. GPU when FEGP is not serviceable
- 3. No APU is to be left running unless either a qualified person is in attendance or the APU has both an auto-shut

(ii) Operation on TWY (J)

TWY (J) is a viable for night operations subject to the following conditions:-

- 1. No centre line lights are provided other than the existing CAT-EYE reflectors.
- 2. No edge lights are provided other than the existing CAT-EYE reflectors.
- 3. No LEAD ON/LEAD off lights are provided.
- 4. STOP-BAR, at present, is illuminated continuously, where contrast and ON / OFF functionality still remains uncontrollable by ADC day and night.
- 5. Clearance to cross the STOP-BAR shall only be issued by ADC when deemed necessary in order for ACFT to proceed day and night.
- 6. FOLLOW-ME vehicle will be provided for all ACFT entering TWY (J) down to the engine-shut down markings day and night.
- 7. FOLLOW-ME vehicle will be provided for all ACFT leaving TWY (J) from the engine-start markings up to the stop-bar only. Pilot shall then request an individual clearance from ADC to cross the stop-bar fro progressive taxiing day and night.

(iii) Single Engine Taxi

ICAO resolution A37-19 emphasizes the importance of the International Civil Aviation to limit or reduce the Carbon Dioxide emissions from aircraft within a state boundary. For this reason Bahrain has adopted a procedure which will help in reducing the emission of CO2 from aircraft and allow for airline fuel conservation. Single Engine Taxi Operations may be exercised by multi-engine aircraft provided the following conditions are met:

- 1. The Pilots should be familiar with Bahrain International Airport in terms of aerodrome layout.
- 2. Pilots executing Single Engine Taxi Operation, should comply to ATC instructions as may be issued during taxiing without any delay.

In addition to the above, Single Engine Taxi Operations shall NOT be used if one of the following cases prevails:

- 1. If taxi or parking will involve a turn of 180 degrees or more.
- 2. The aircraft is on the active RWY or requesting to cross the RWY.

(iv) Stop Bars Holding

Aircraft or vehicles shall not cross a runway holding point until they have received verbal clearance from ATC and the STOP BAR has been extinguished.

STOP BARS shall not be crossed without specific ATC clearance as follows. Unable to turn STOP BARS off. Cross Red STOP BAR.

{v} Transponder Setting

All Transponder equipped aircraft shall select transponder to standby or off, when fully parked on the stand or gate.

AIRAC AMDT 03/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 2-OBBI-11 17 SEP 15

OBBI AD 2.21 NOISE ABATEMENT PROCEDURES

NOISE ABATEMENT PROCEDURES - BAHRAIN

1. Circuit directions at BAHRAIN INTERNATIONAL airport are:

RWY 30L/30R: right hand;

RWY 12L / 12R: left hand.

2. Departing and arriving flights are not permitted to operate within the eighty - degree arc subtended by the 180° and 260° Radials of the BAH DVOR, and containing the main Bahrain Islands. Exceptionally, flights which the Controlling Authority has deemed operationally essential may be permitted to operate within this arc, provided they can remain either visually clear of the land, or be vectored clear by BAHRAIN APPROACH.

3. Usage of reverse thrust:

Usage of reverse thrust more than idle is not permitted during landing between the hours of 2100 and 0300, unless an aircraft is in an emergency and has been cleared to use the reverse thrust by the ATC.

4. Engine Run Ups at BAHRAIN INTERNATIONAL airport

Between the hours of 2100 and 0300, testing of aircraft engines is permissible at ground idle power only. Settings above this, however brief, are not allowed.

OBBI AD 2.22 FLIGHT PROCEDURES

2.22.1 RNAV GNSS APPROACH

GNSS approach is part of the GPS service and is established at Bahrain, therefore, acquisition of such service could only be done by means of flying towards a number of way points which are prevailed along the approach phases within BAHRAIN TMA after which it will guide an aircraft to the final approach of the landing RWY, such procedure may only be flown using significant position co - ordinates that are stored in the aircraft's navigational data base.

a) RNAV GNSS APPROACH WAYPOINTS RWY 12L

Point	Co - ordinates
LOVAL	262406.31N 0502422.32E
PAXEM	262714.97N 0503034.48E
BI501	261909.61N 0503258.24E
BI502	262122.55N 0502907.28E
RW12L	261644.30N 0503710.31E

b) RNAV GNSS APPROACH WAYPOINTS RWY 30R

Point	Co - ordinates
GOLBI	261445.72N 0505212.46E
DAXEL	260822.45N 0505137.90E
BI601	261320.28N 0504303.57E
BI602	261106.96N 0504654.00E
RW30R	261545.76N 0503851.75E

2.22.2 RVR RESTRICTIONS

No landing and take off will be allowed at BAHRAIN INTERNATIONAL airport if the reported RVR reading is 350 M or less.

AIP 6th Edition 03/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 2-OBBI-13 3 MAR 16

OBBI AD 2.23 ADDITIONAL INFORMATION

Minimization of time of the RUNWAY

A number of recent incidents have led to a reduction in the minimum requirement for runway separation between arriving and departing aircraft. The factors causing these incidents have been found to be:

- 1. Arriving aircraft delay to vacate the runway after landing and / or stop before the entire aircraft has vacated the runway.
- 2. Departing aircraft, having reported "ready" and been cleared for takeoff, delay on the runway before commencing takeoff roll.

Factors ATC considers:

- 1. IFR separation on final approach course may reduce to 3NM. This reduced separation minima enhances airspace efficiency and runway utilization.
- 2. For the purposes of issuing a takeoff or landing clearance to subsequent aircraft, a preceding aircraft is not considered to be clear of the runway until the arriving aircraft is completely clear of the runway or the departing is airborne.
- 3. in the order to achieve the maximum runway utilization, it is essential that landing aircraft vacate the runway without delay; and that the departing aircraft, once cleared for takeoff, commence takeoff roll without delay.
- 4. in the event of arriving or departing aircraft delaying on the runway, it may become necessary for the subsequent departing aircraft's takeoff clearance to be delayed; or for the subsequent arriving aircraft to be instructed to go around. Incidents of this nature have serious safety implication for all operators.

Pilots are, therefore, reminded of their responsibilities.

Arriving Aircraft

- 1. Plan their runway exit point prior to landing, it is preferred that aircraft landing Runway 12L vacate via taxiway 'F' or before; and that aircraft landing Runway 30R vacate via taxiway 'D' or before. Advise ATC as soon as practicable if unable to exit the runway as instructed.
- 2. Do not stop or reduce speed to less than required taxi speed prior to vacating the Runway completely.
- 3. Vacate the Runway expeditiously.

Departing Aircraft

- 1. Report "ready" only when ready for immediate takeoff.
- 2. Once cleared for takeoff, commence takeoff roll with minimum delay.

INTENTIONALLY BLANK

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR AD 2-OBBI-15 25 MAY 17


OBBI AD 2.24 CHARTS RELATED TO AN AERODROME

Chart name Page AERODROME/HELIPORT CHART AD 2-OBBI-17 AERODROME GROUND MOVEMENT CHART **AD 2-OBBI-19** AIRCRAFT PARKING DOCKING CHART MAIN APRON A AD 2-OBBI-21 AIRCRAFT PARKING DOCKING CHART MAIN APRON B AD 2-OBBI-23 AIRCRAFT PARKING DOCKING CHART MIDDLE AND CARGO APRONS AD 2-OBBI-25 AIRCRAFT PARKING DOCKING CHART EXECUTIVE AND CARGO APRON AD 2-OBBI-27 AIRCRAFT PARKING DOCKING CHART WESTERN APRONS A & B CARGO & EXECUTIVE APRONS AD 2-OBBI-29 AIRCRAFT PARKING DOCKING CHART NORTHERN APRON AD 2-OBBI-31 AIRCRAFT PARKING DOCKING CHART EASTERN APRON AD 2-OBBI-33 AIRCRAFT PARKING DOCKING CHART EASTERN APRON EXTENSION AD 2-OBBI-35 AERODROME OBSTACLE CHART RWY 12L / 30R AD 2-OBBI-37 AERODROME OBSTACLE CHART RWY 12R / 30L AD 2-OBBI-39 PRECISION APPROACH TERRAIN CHART - ICAO RWY 30R AD 2-OBBI-41 AREA CHART BAHRAIN AD 2-OBBI-43 BAHRAIN FIR DEPARTURE CHART RADAR AD 2-OBBI-45 CIRCLING AUTHORIZATION AREA AD 2-OBBI-47 IAC - ICAO RWY 12L ILS DME CAT A, B, C & D AD 2-OBBI-49 IAC - ICAO RWY 12L VOR DME CAT A, B, C & D AD 2-OBBI-51 IAC - ICAO RWY 12L VOR CAT A. B. C & D AD 2-OBBI-53 IAC - ICAO RWY 12L RNAV GNSS AD 2-OBBI-55 IAC - ICAO RWY 12R VOR DME VISUAL CAT A, B, C & D **AD 2-OBBI-57** IAC - ICAO RWY 30L VOR DME VISUAL CAT A. B. C & D AD 2-OBBI-59 IAC - ICAO RWY 30R ILS DME CAT A, B, C & D AD 2-OBBI-61 IAC - ICAO RWY 30R VOR DME CAT A, B, C & D AD 2-OBBI-63 IAC - ICAO RWY 30R VOR CAT A, B, C & D AD 2-OBBI-65 IAC - ICAO RWY 30R RNAV GNSS AD 2-OBBI-67 VISUAL APP CHART - ICAO AD 2-OBBI-69 **BIRD CONCENTRATIONS** AD 2-OBBI-71 RADAR MINIMUM ALTITUDE CHART AD 2-OBBI-73 STAR CHART - ICAO RWY 12L/30R RNAV1 - RADIO COMMUNICATION FAILURE STAR AD 2-OBBI-75 STAR CHART - ICAO RWY 12L/30R RNAV1 - DENVO 1 ARRIVAL AD 2-OBBI-77 STAR CHART - ICAO RWY 12L/30R RNAV1 - KOBOK 1 ARRIVAL AD 2-OBBI-79 STAR CHART - ICAO RWY 12L/30R RNAV1 - LADNA 1 ARRIVAL AD 2-OBBI-81 STAR CHART - ICAO RWY 12L/30R RNAV1 - SOGAT 1 ARRIVAL AD 2-OBBI-83

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

INTENTIONALLY BLANK


AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

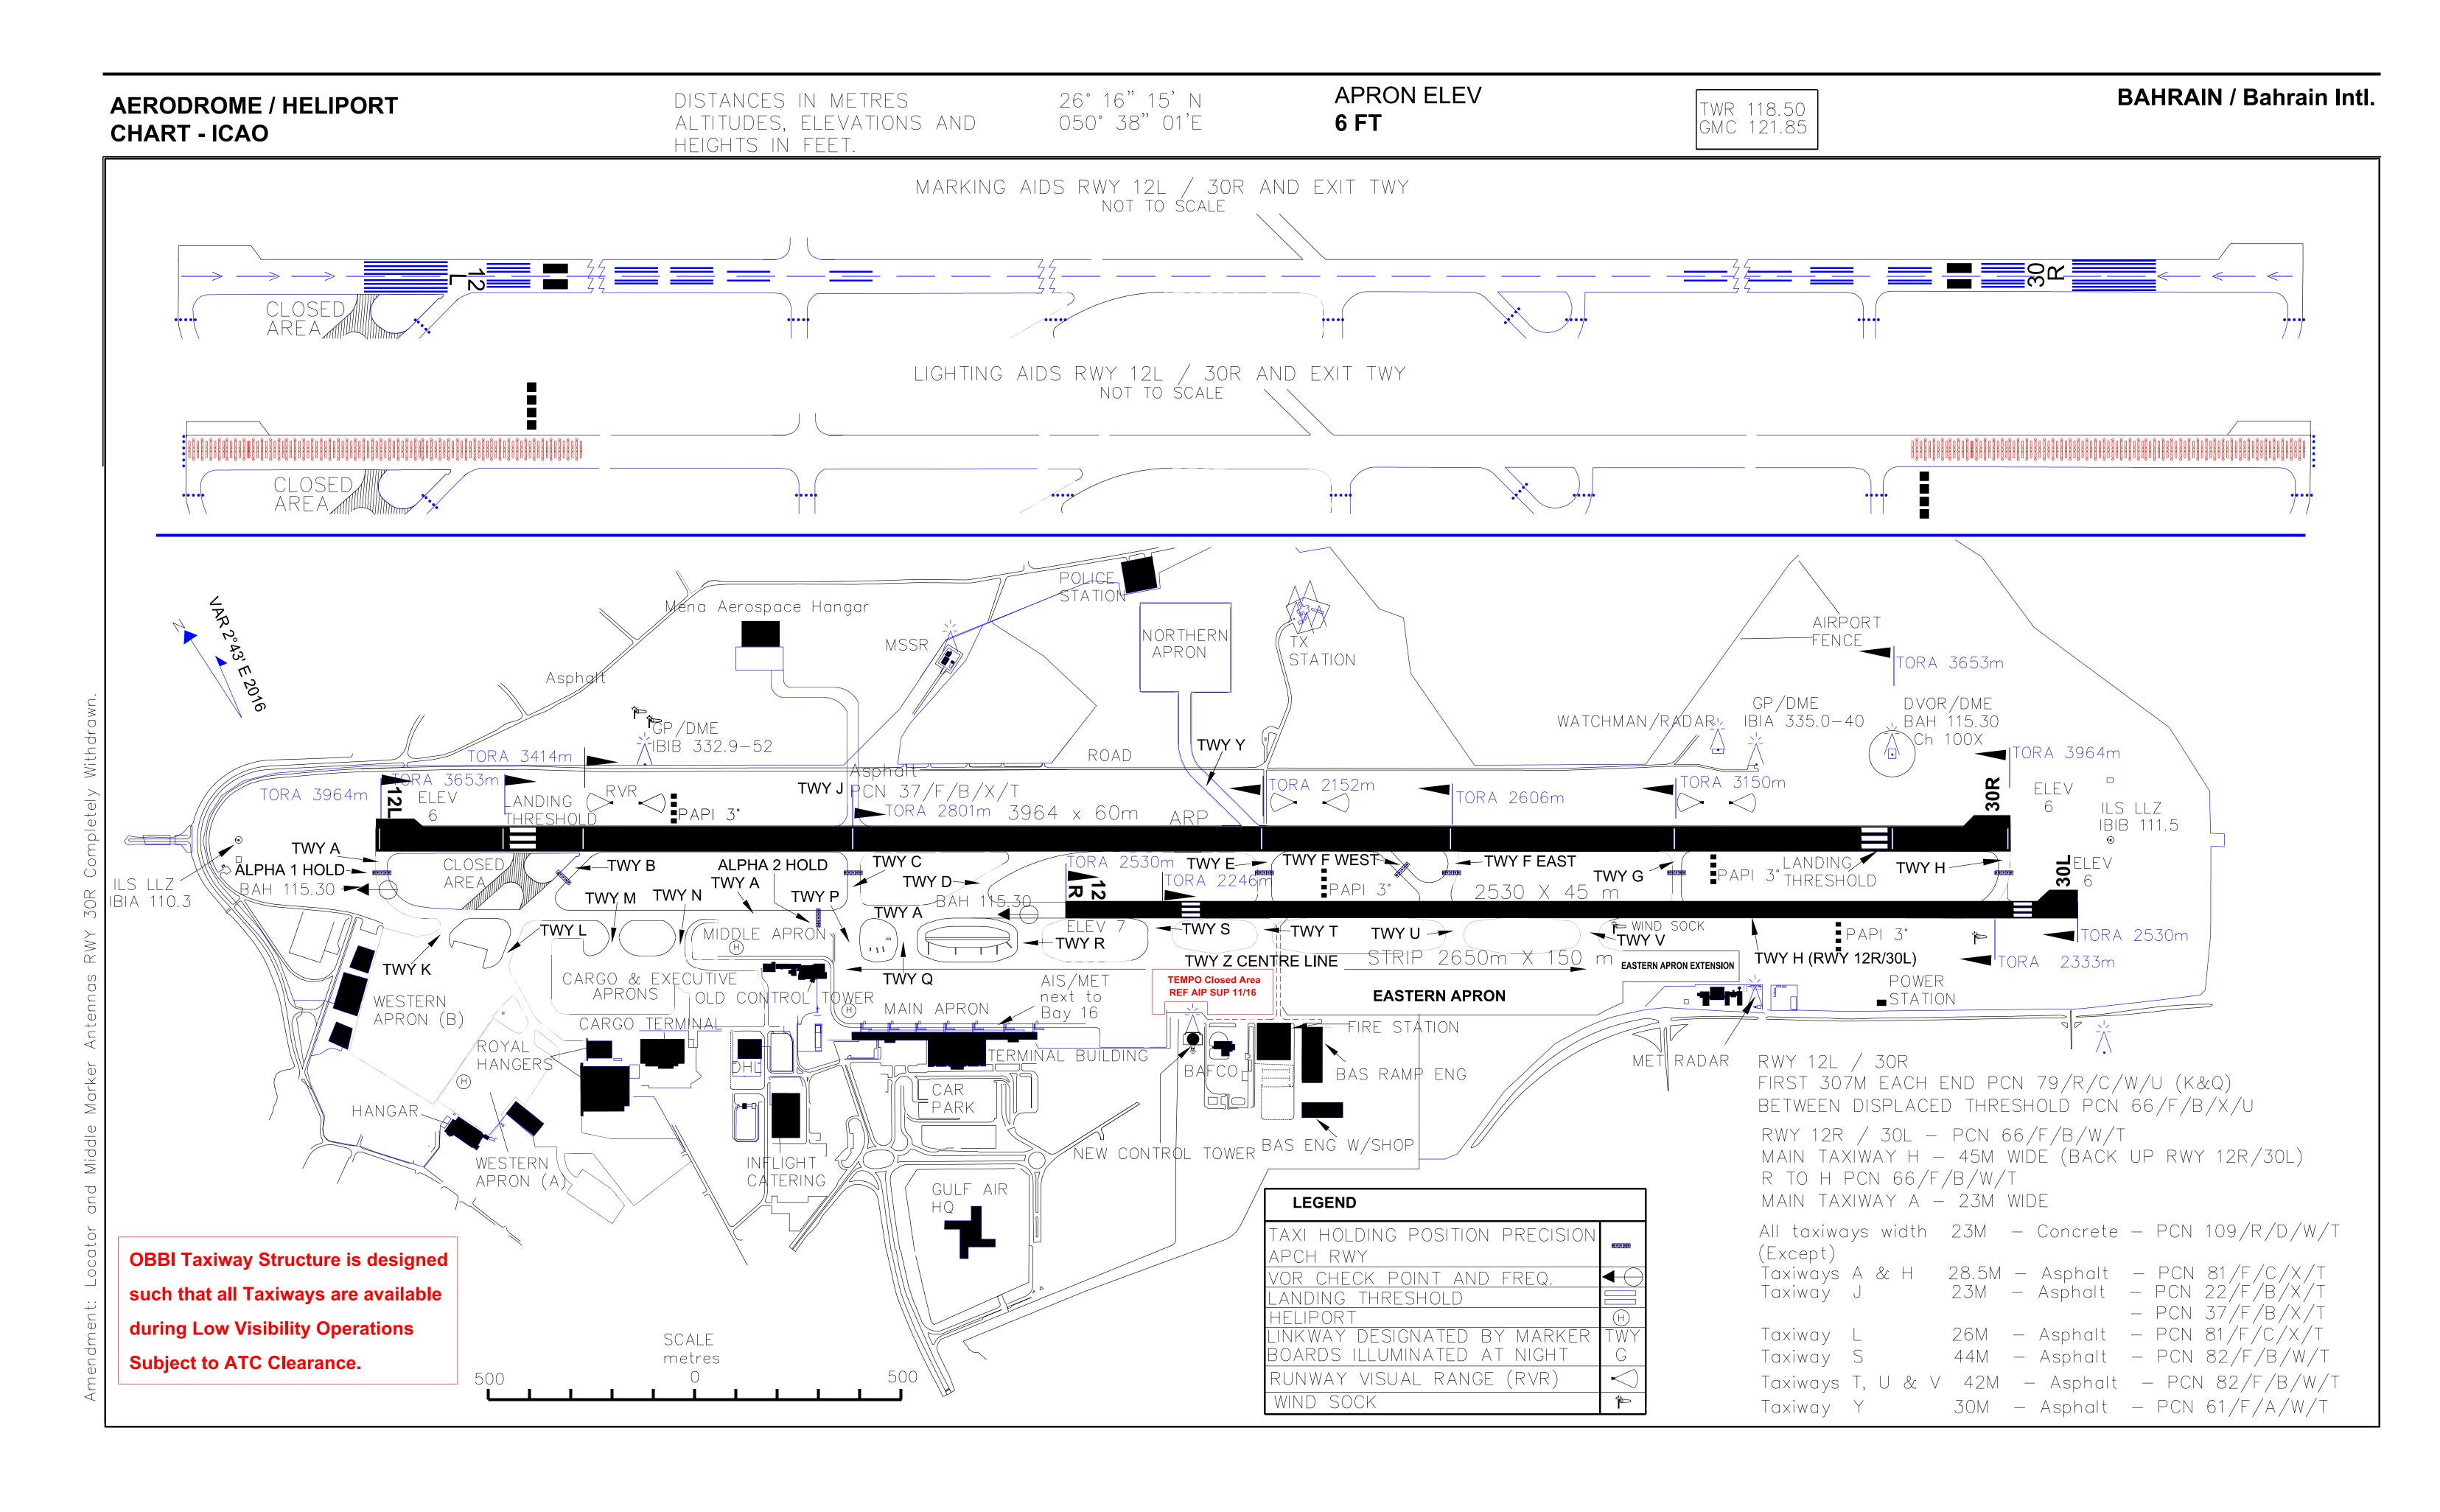

CIVIL AVIATION AFFAIRS

INTENTIONALLY BLANK

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

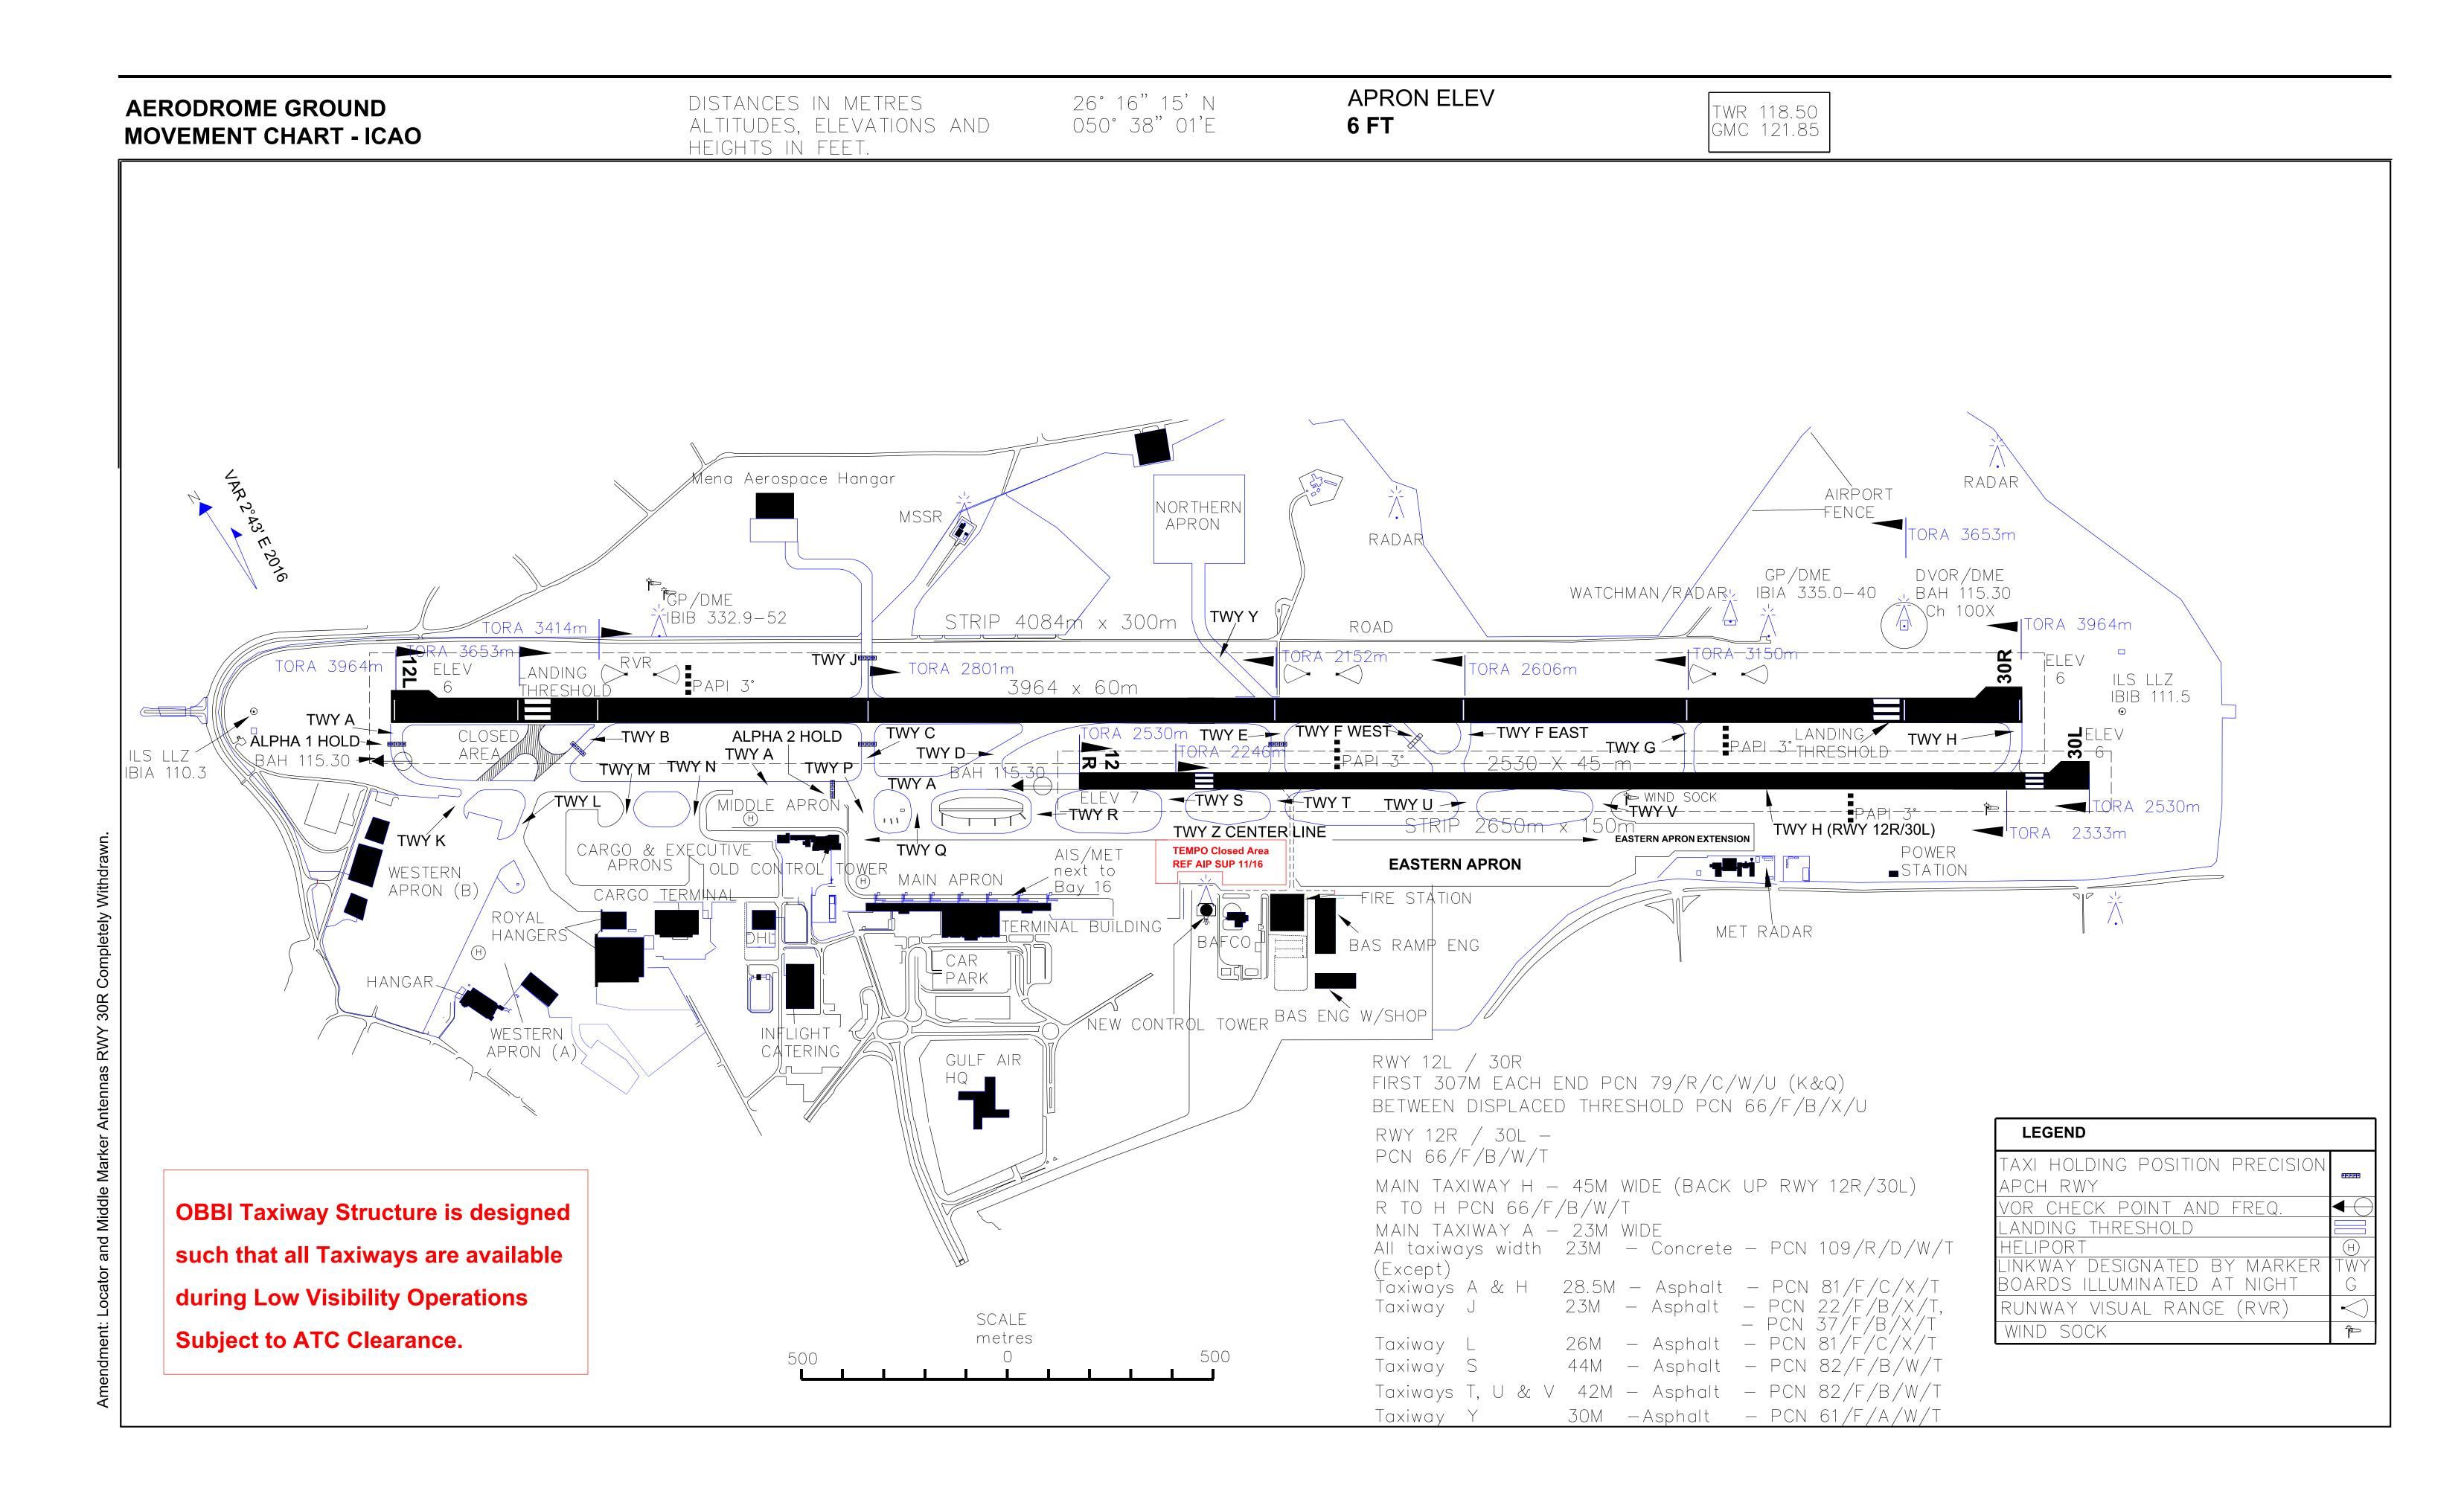

CIVIL AVIATION AFFAIRS


INTENTIONALLY BLANK

AIP 6th Edition 10/15 CIVIL AVIATION AFFAIRS

AIRCRAFT PARKING / TWR 118.50 **APRON ELEV BAHRAIN / Bahrain Intl.** GMC 121.85 **DOCKING CHART-ICAO** 6 FT 0 MAIN TWY H CENTRELINE 461610.30N 0503737.88E MAIN TWY H SHOULDER OUTER SERVICE ROAD INS COORDINATES FOR AIRCRAFT STANDS 8 ARBRIDGE NEW EMERGENCY RWY END LIGHTS Q 261616.40N 0503729.30E 0 BRIEFING 16 MAIN TWY A CENTRELINE MAIN TWY A SHOULDER 0 OUTER SERVICE ROAD LGTS RWY BUILDING 5 AIRCRAFT STAND APRON, TWY & 0 TERMINAL 8 Amendment: Taxiway Links re-designated; Establishment of new Emergency Runway. APRON 0 \Box 8 3 0 OUTER SERVICE ROAD 0 0 20 Δ

CIVIL AVIATION AFFAIRS


AIP 6th Edition 10/15

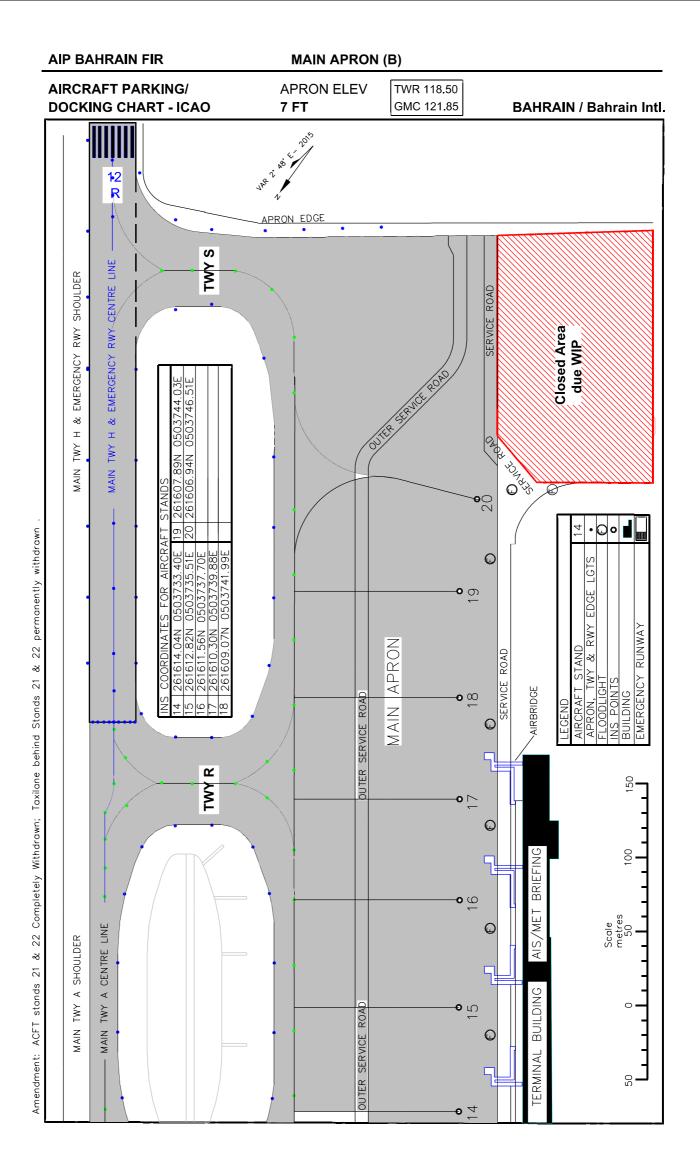


CIVIL AVIATION AFFAIRS

AIP 6th Edition 03/16


MIDDLE APRON

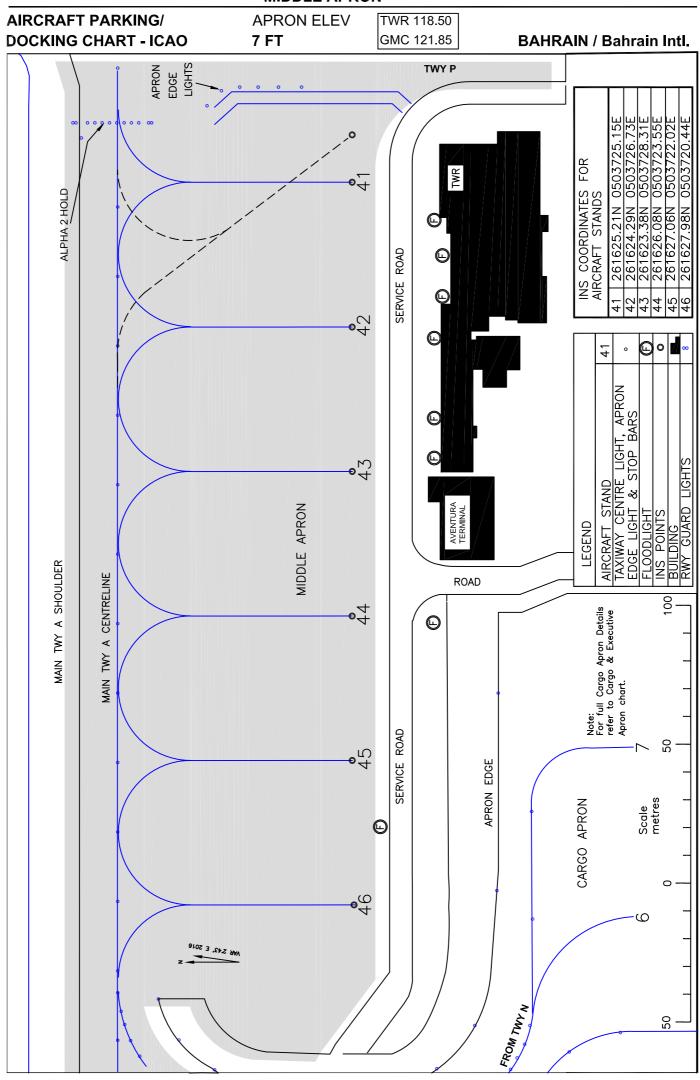

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

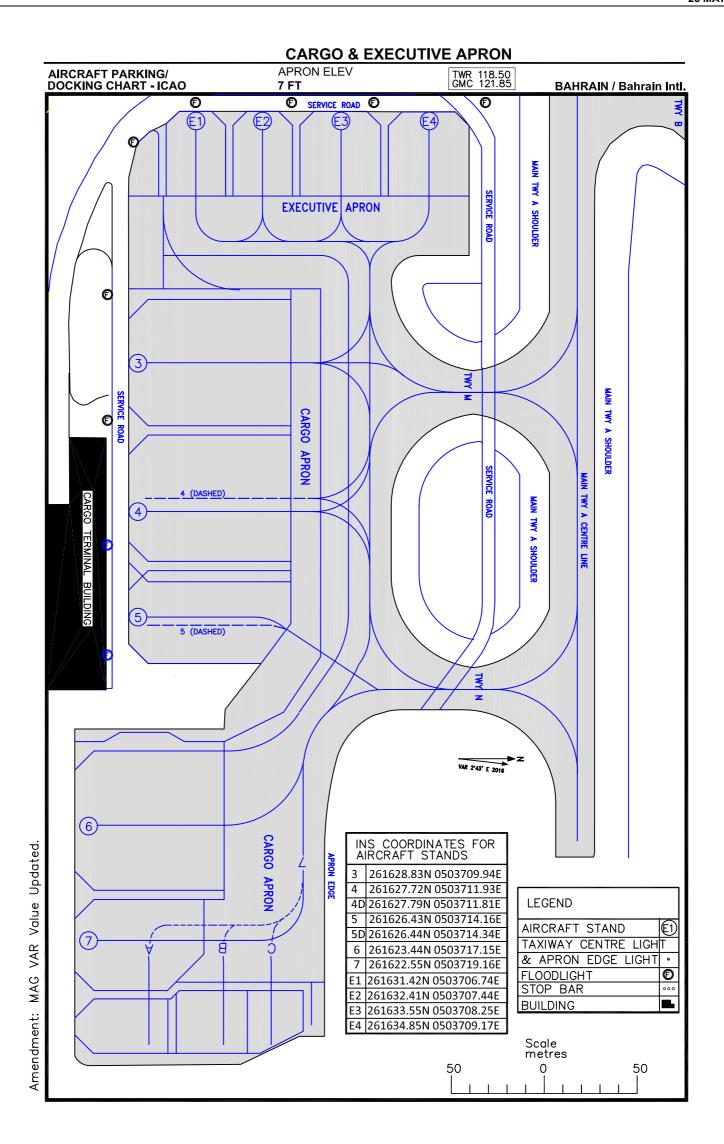


CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

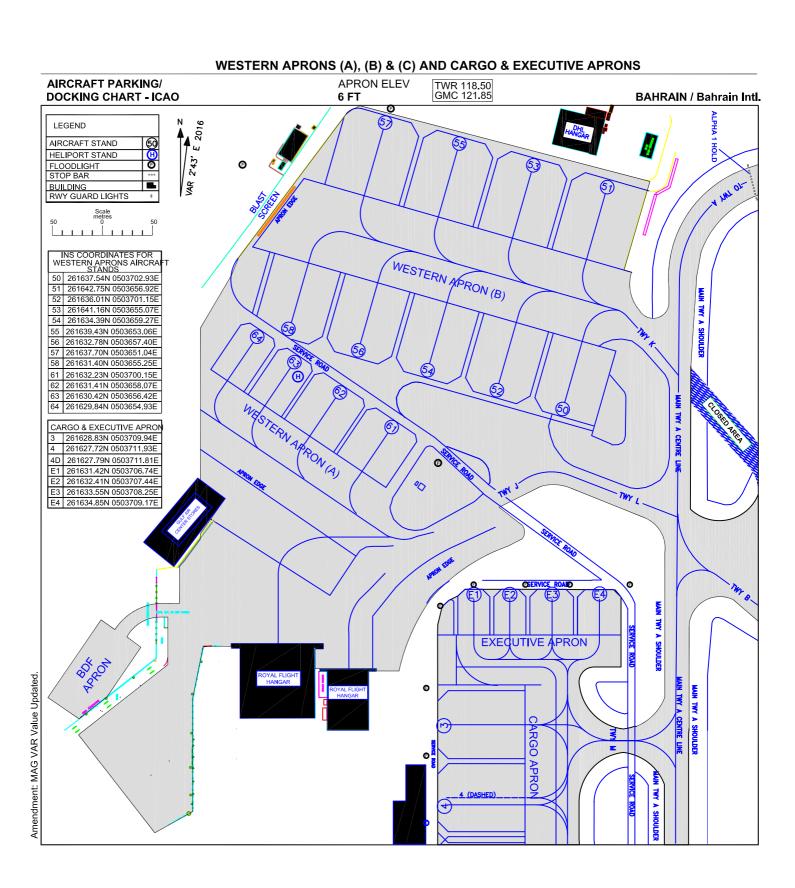


CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

NORTHERN APRON AIRCRAFT PARKING/ APRON ELEV TWR 118.50 **DOCKING CHART - ICAO** GMC 121.85 6 FT **BAHRAIN / Bahrain Intl.** APRON EDGE 75° **●**74 73• **⊙**72 710 **•**70

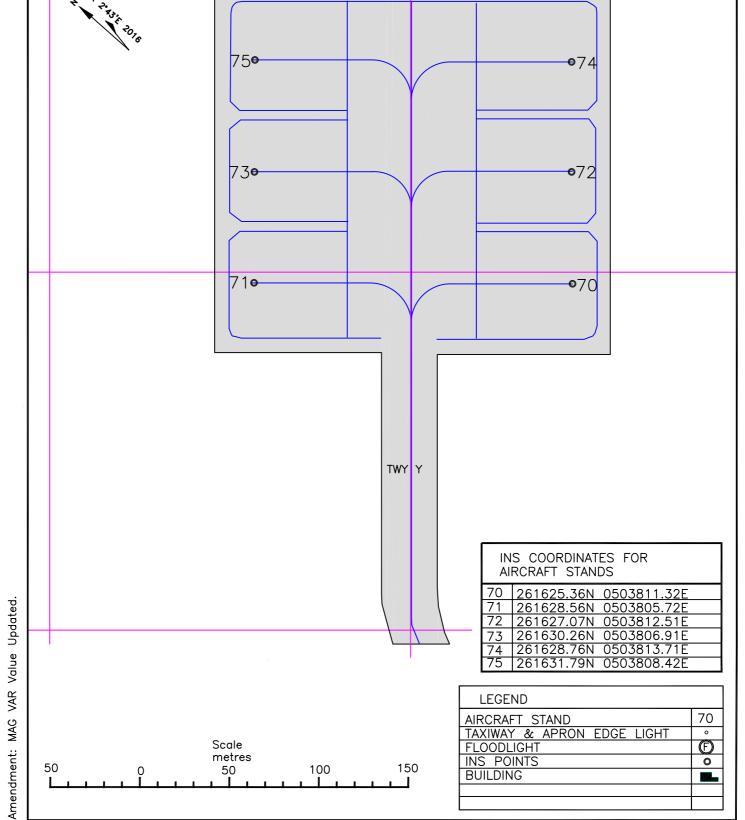

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17


EASTERN APRON

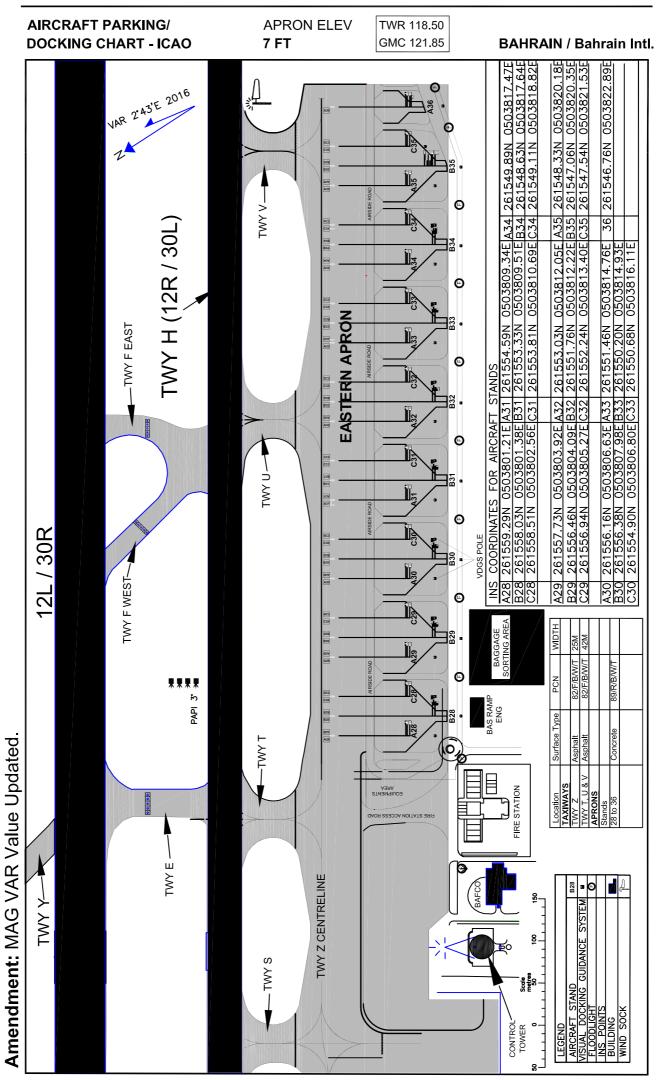



CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17


Amendment: MAG VAR Value Updated


DOCKING AIRCRAFT PARKING/ TAXI LANE ZULU **CHART - ICAO**

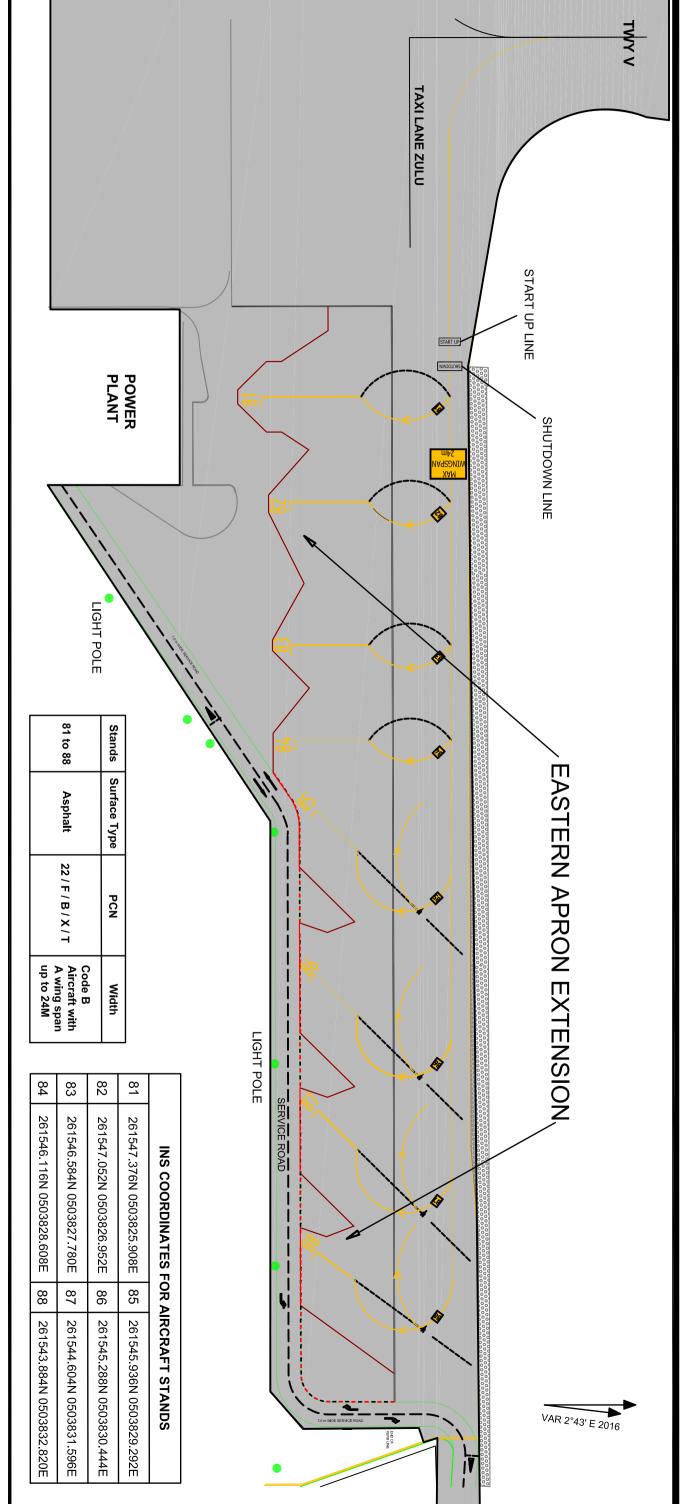

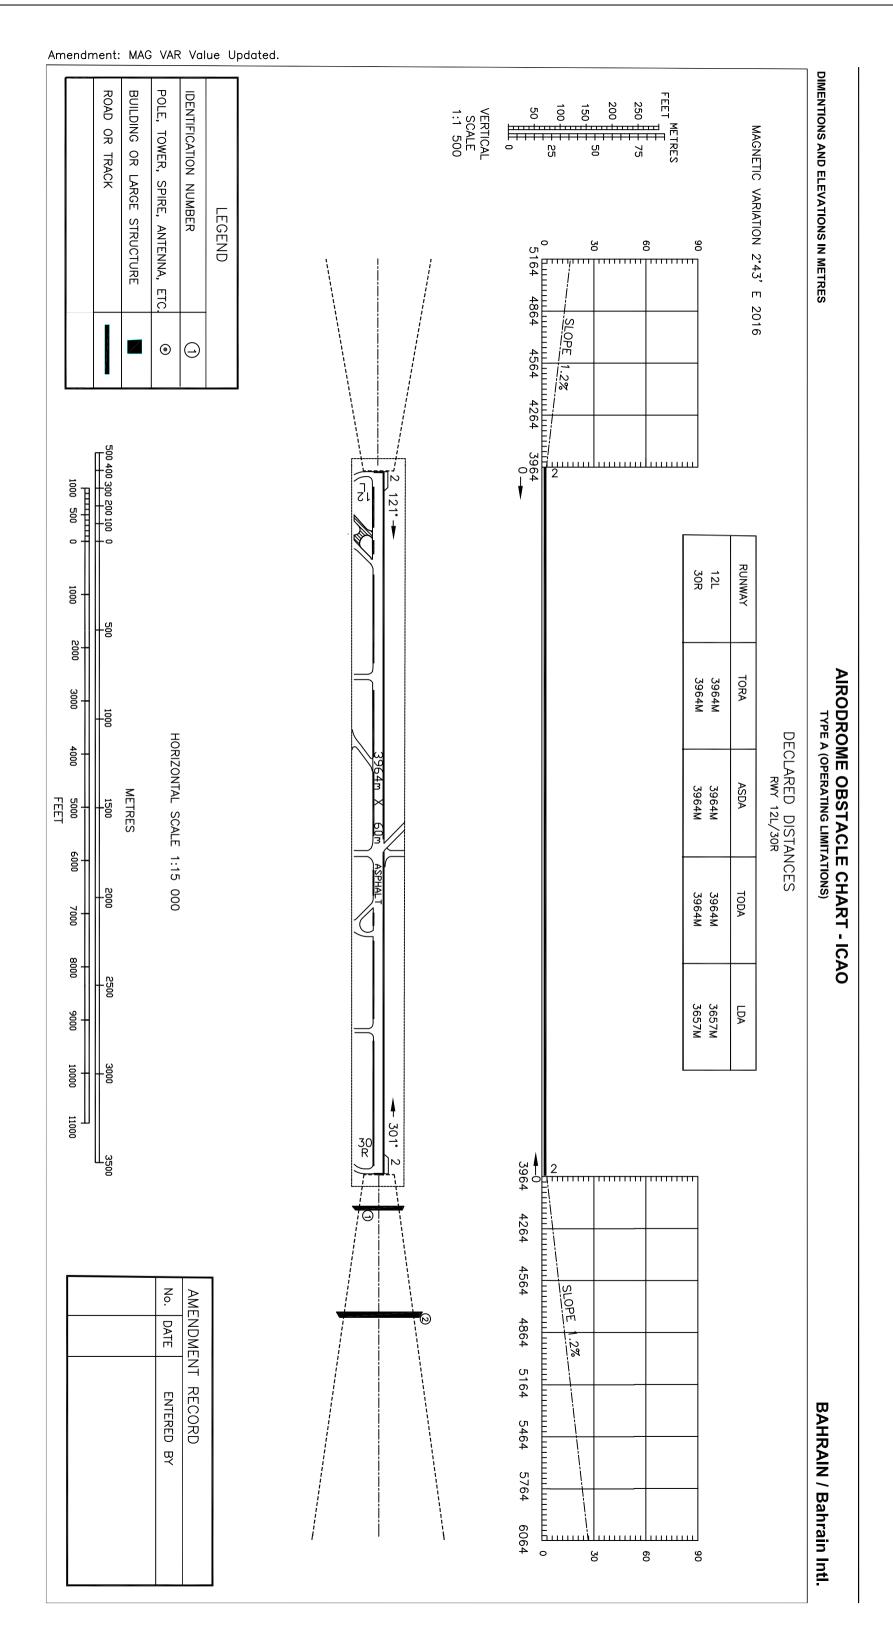


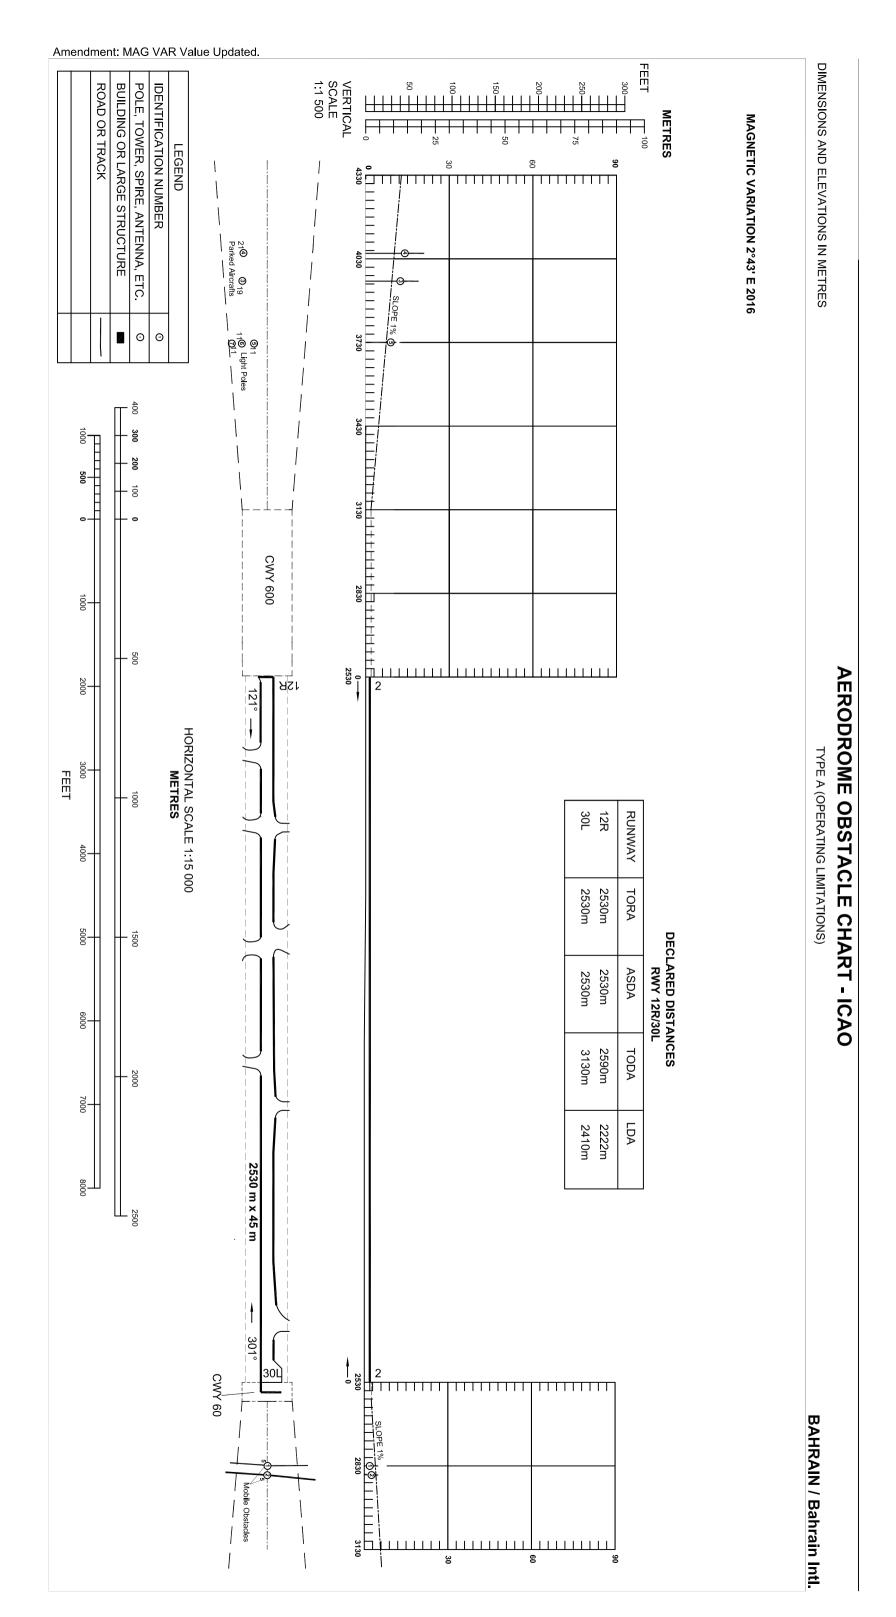

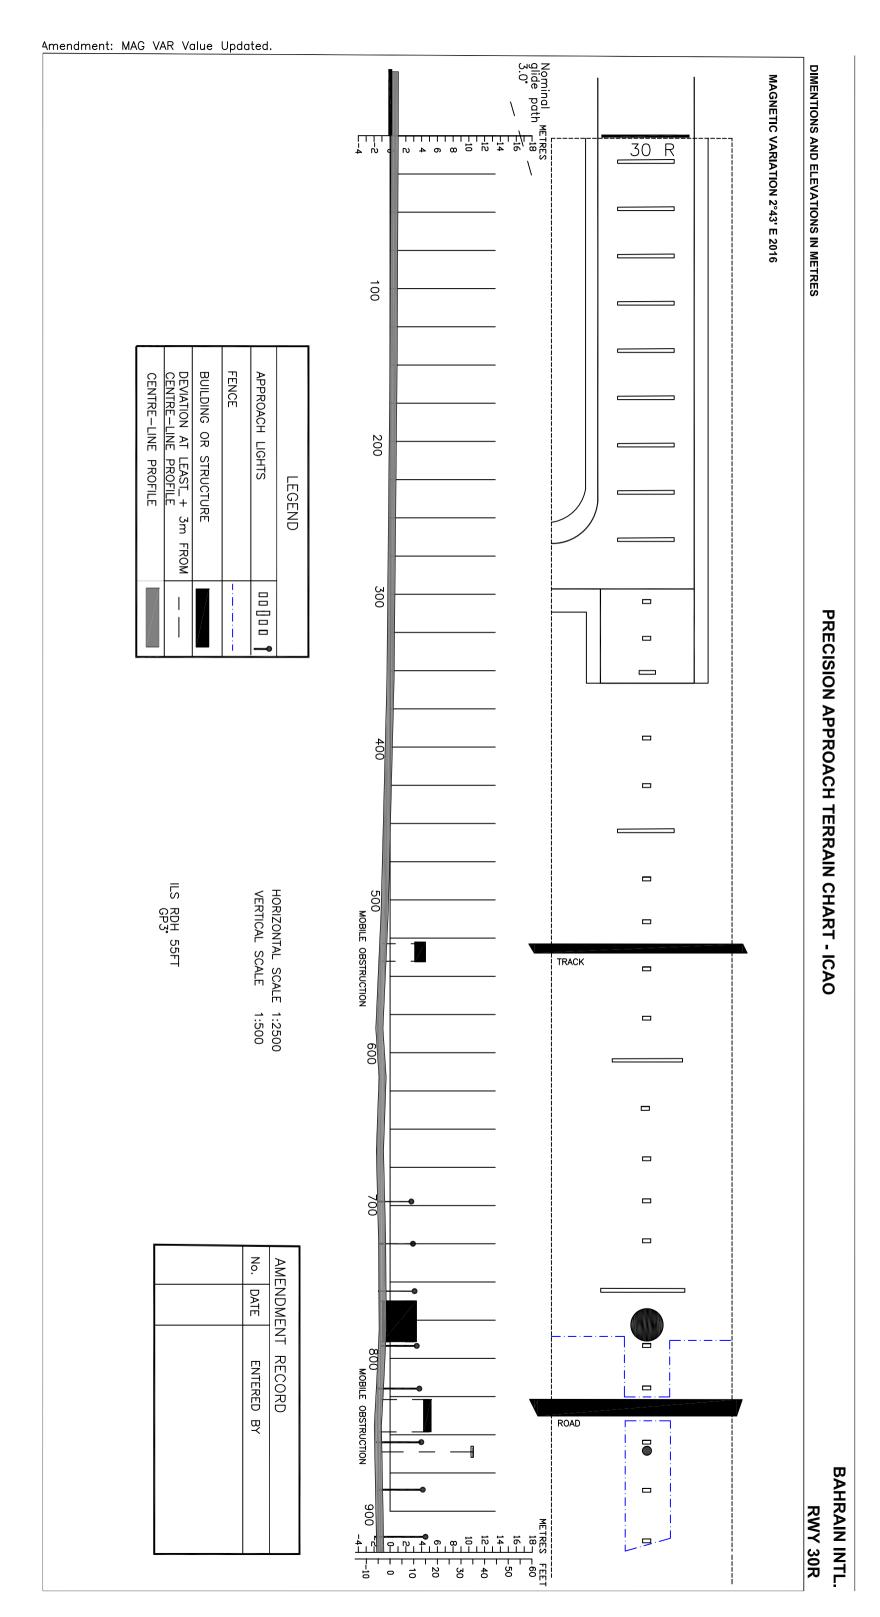

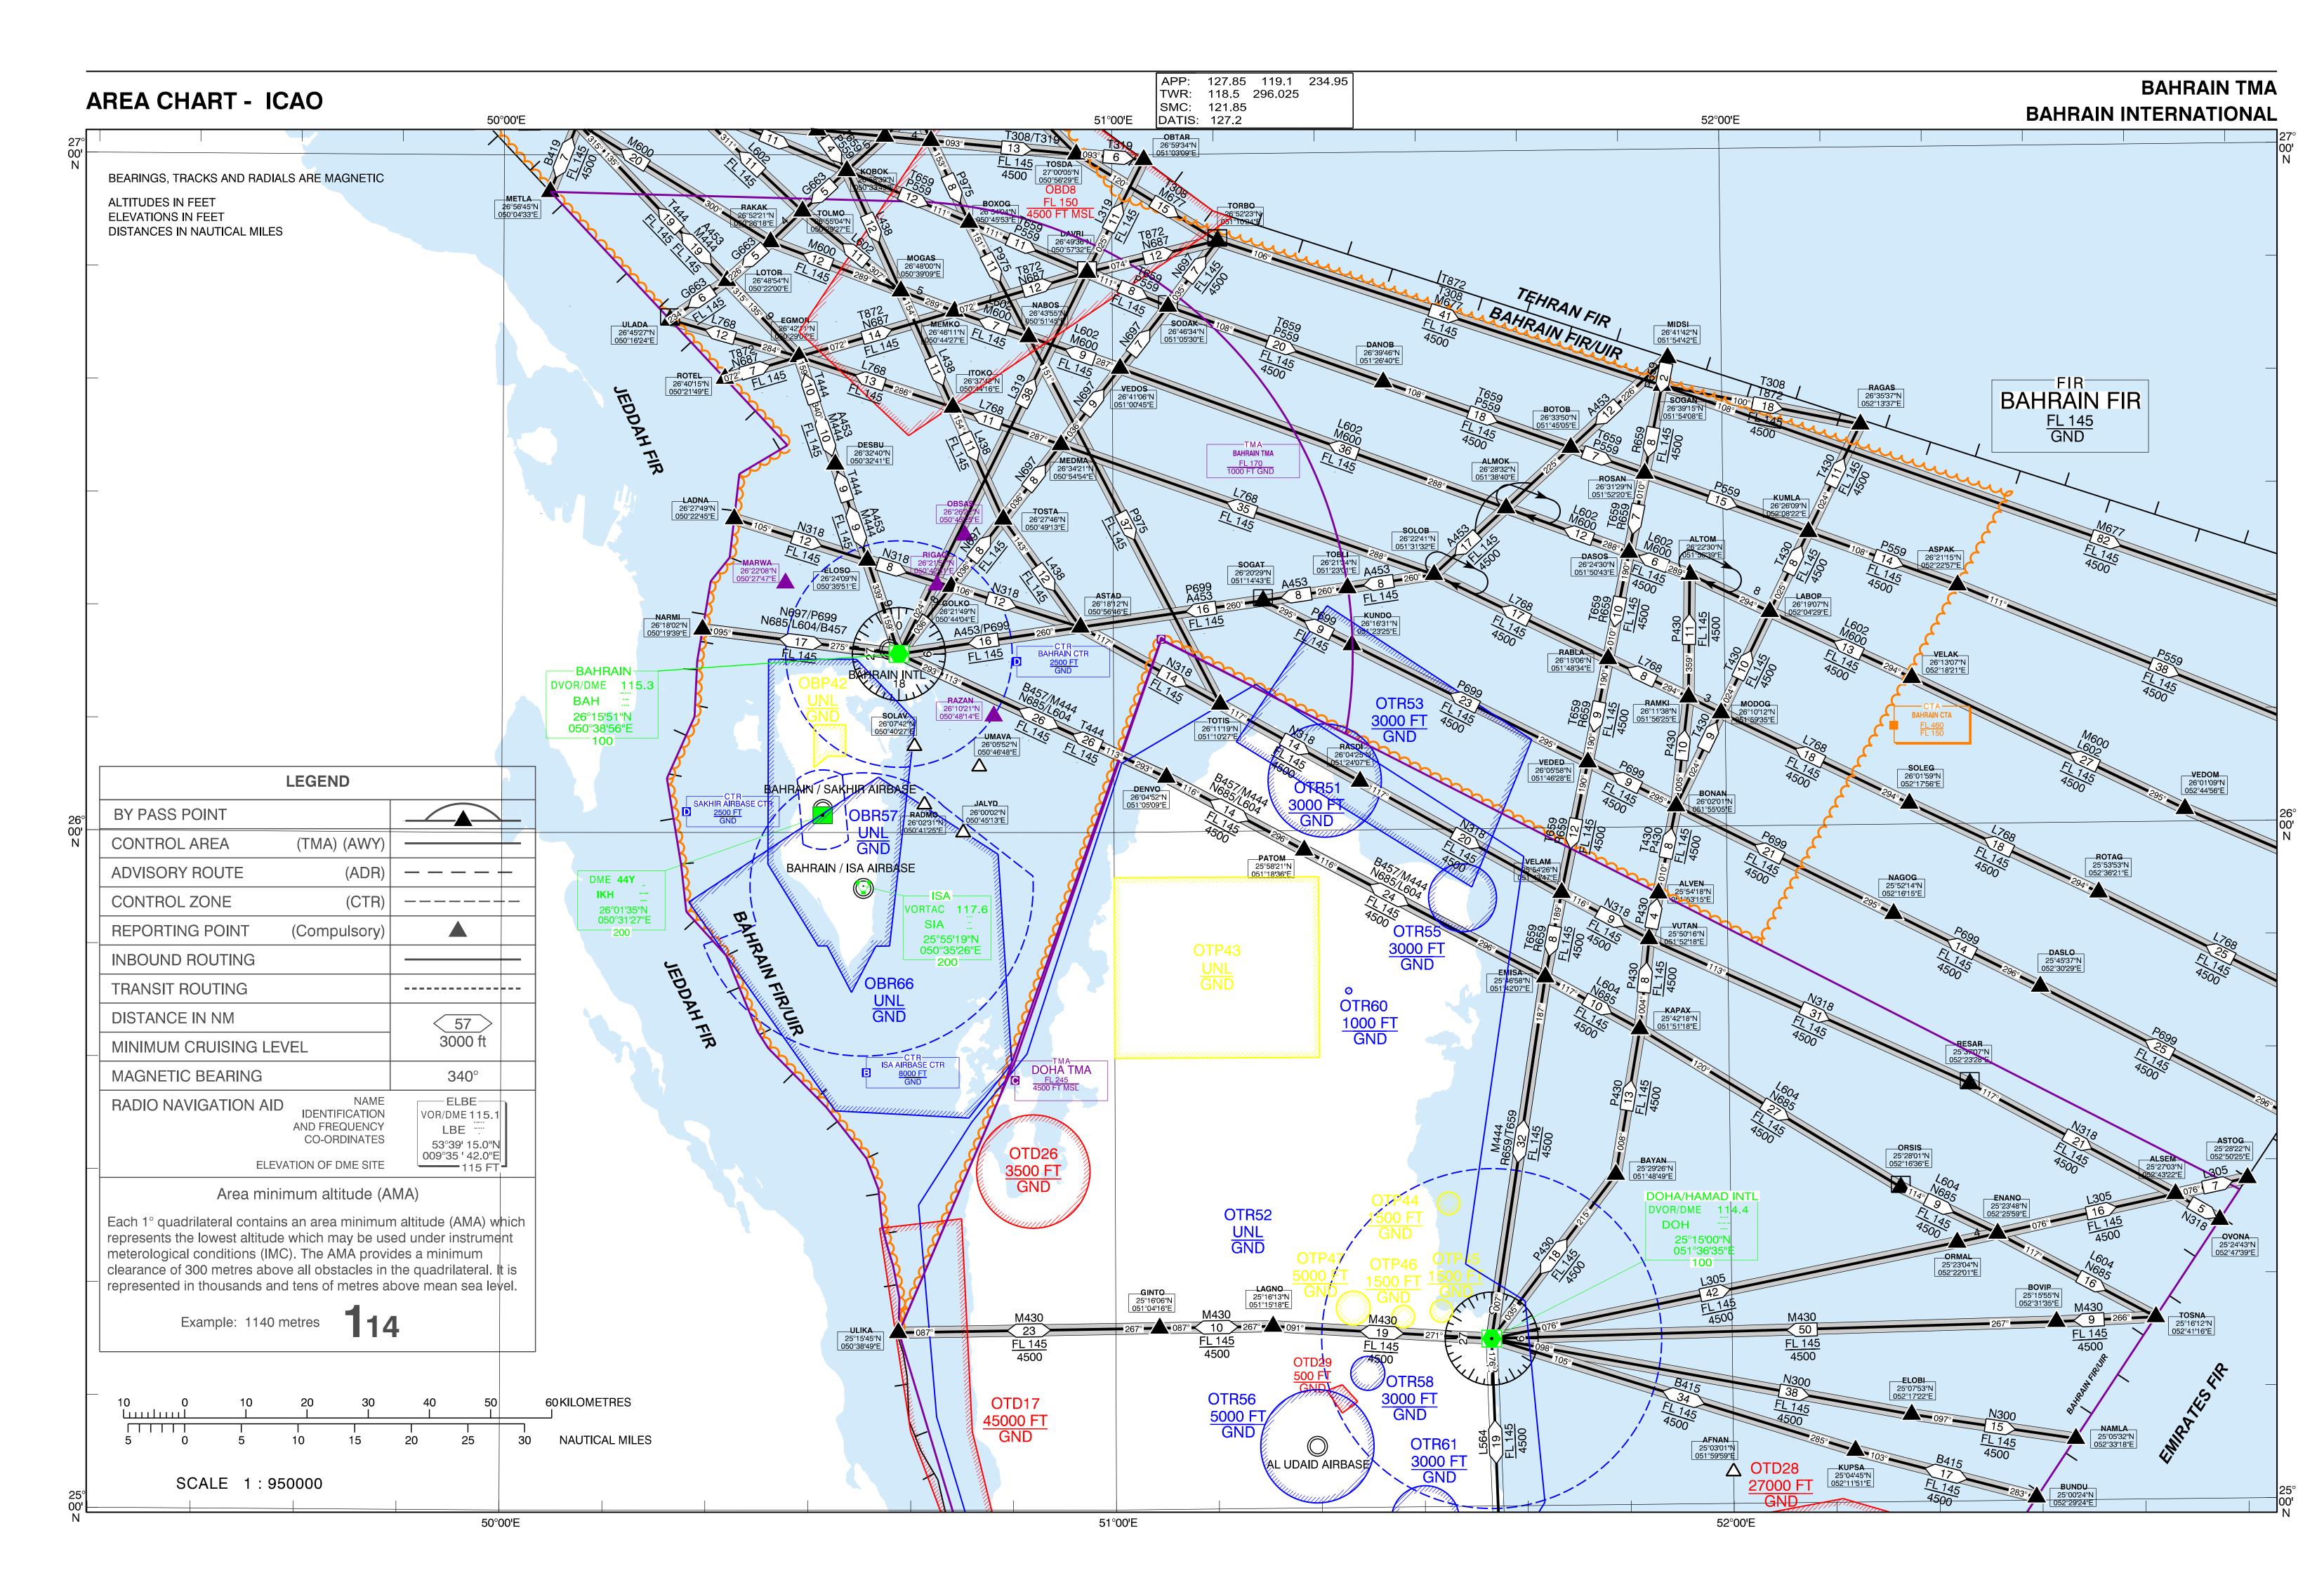

AIP BAHRAIN FIR AD 2-OBBI-45

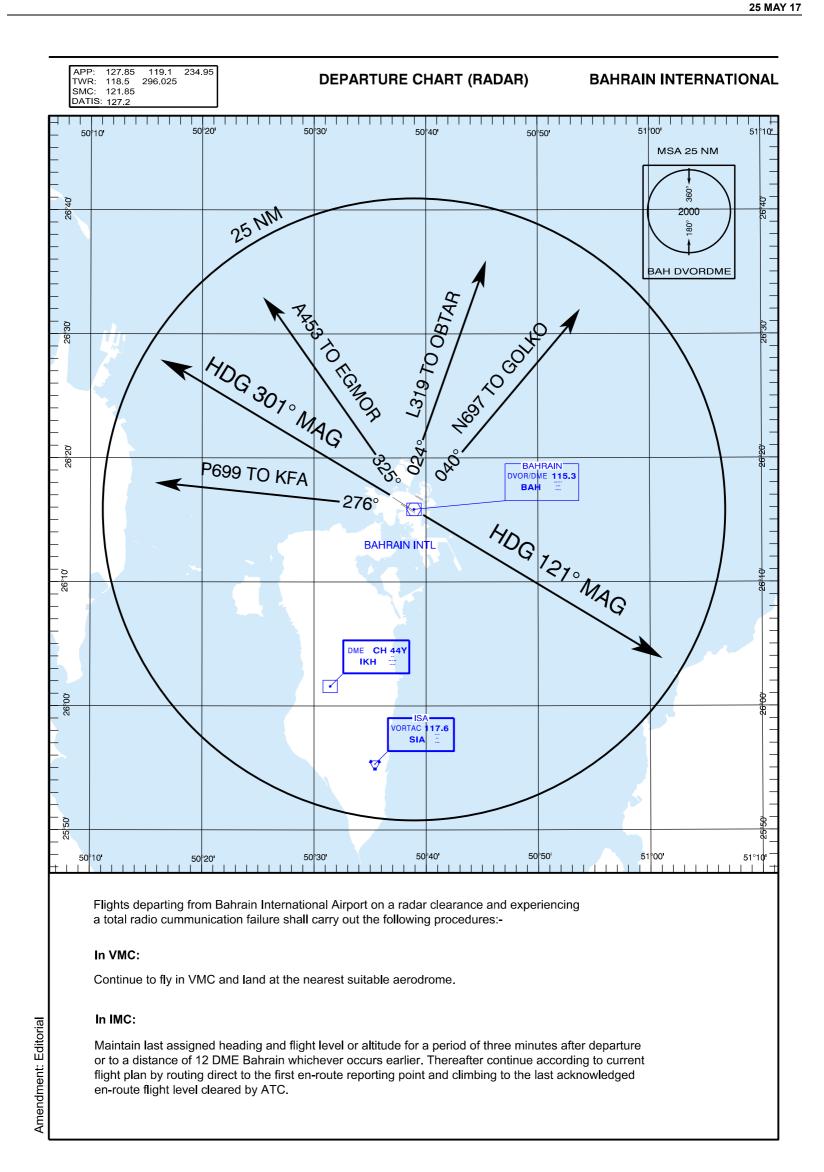

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

BAHRAIN INTERNATIONAL

CIRCLING AUTHORIZATION AREA



APPLICABLE TO RWY 12L/30R DEPARTURE.


- 1) RWY 30R Expect right turn heading 350° M or RWY heading.
- 2) RWY 12L Expect left turn heading 070° M or RWY heading.
- 3) Departure Frequency 119.100 MHZ.

Heading assigned by ATC shall only by between 260° M through north to 180° M.

Procedures are only valid within 25 NM ARP.


No circling authorized between radials 180° M and 260° M clockwise.

Amendment: MAG VAB

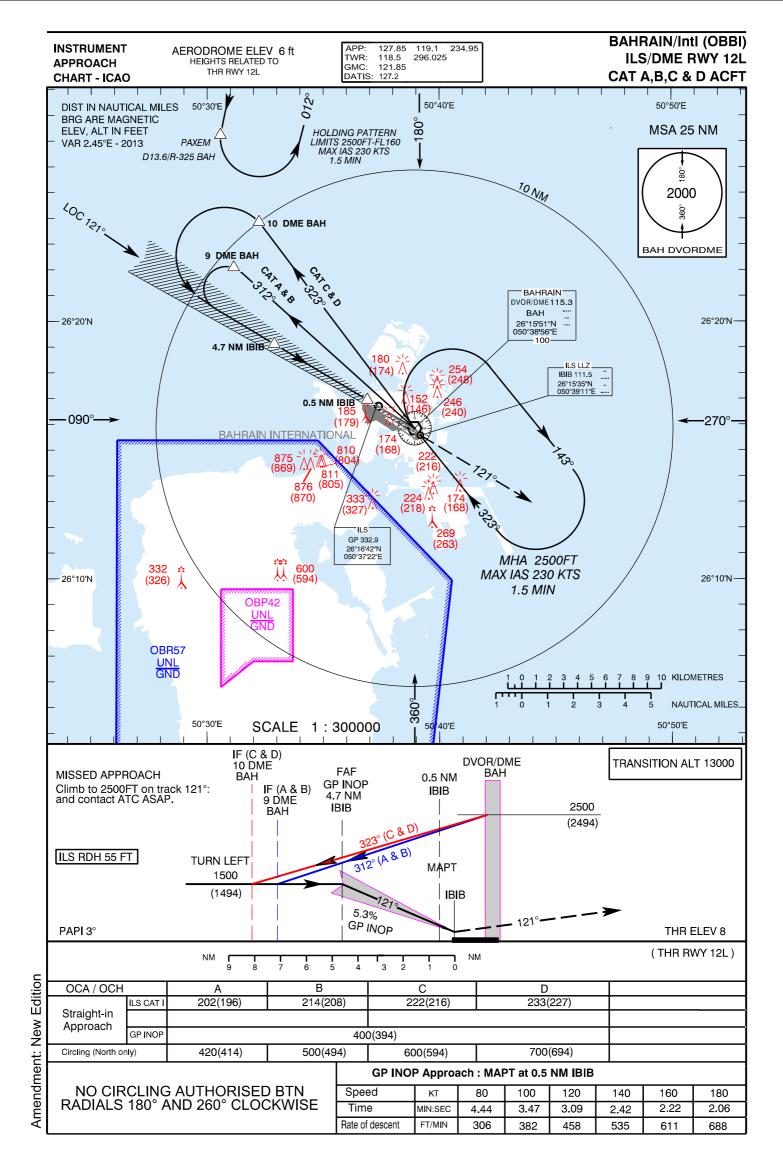


CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

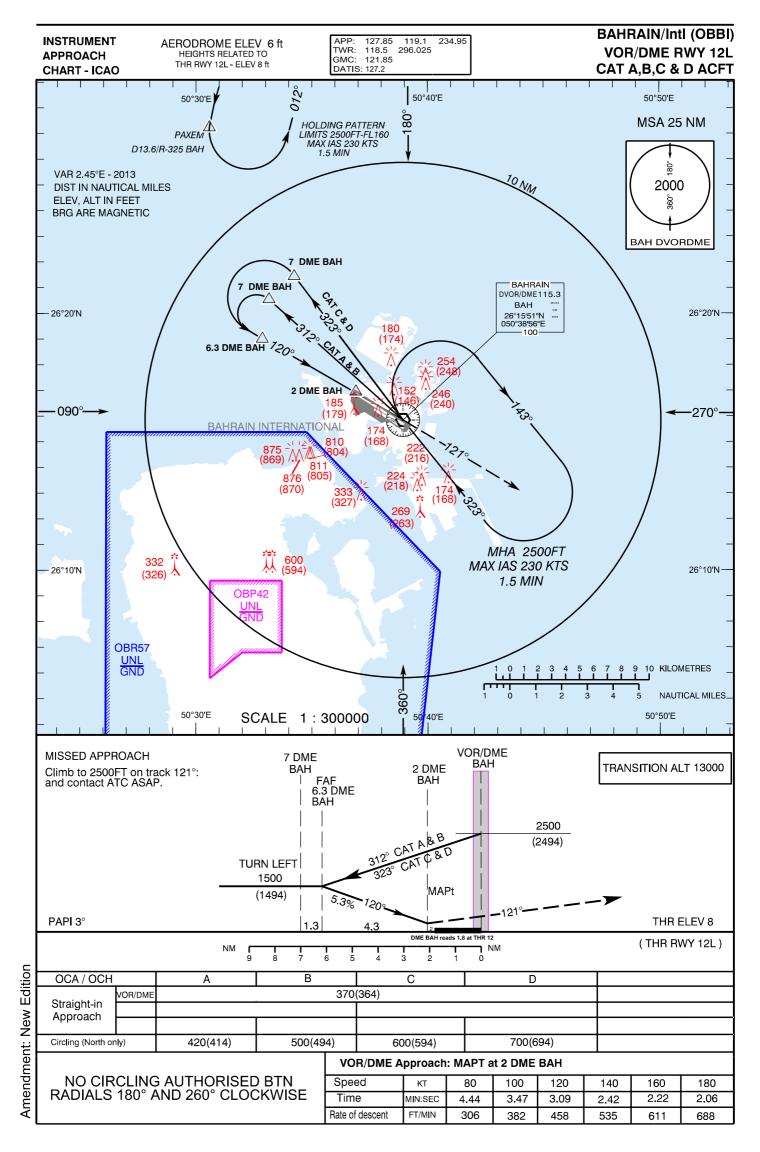


CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

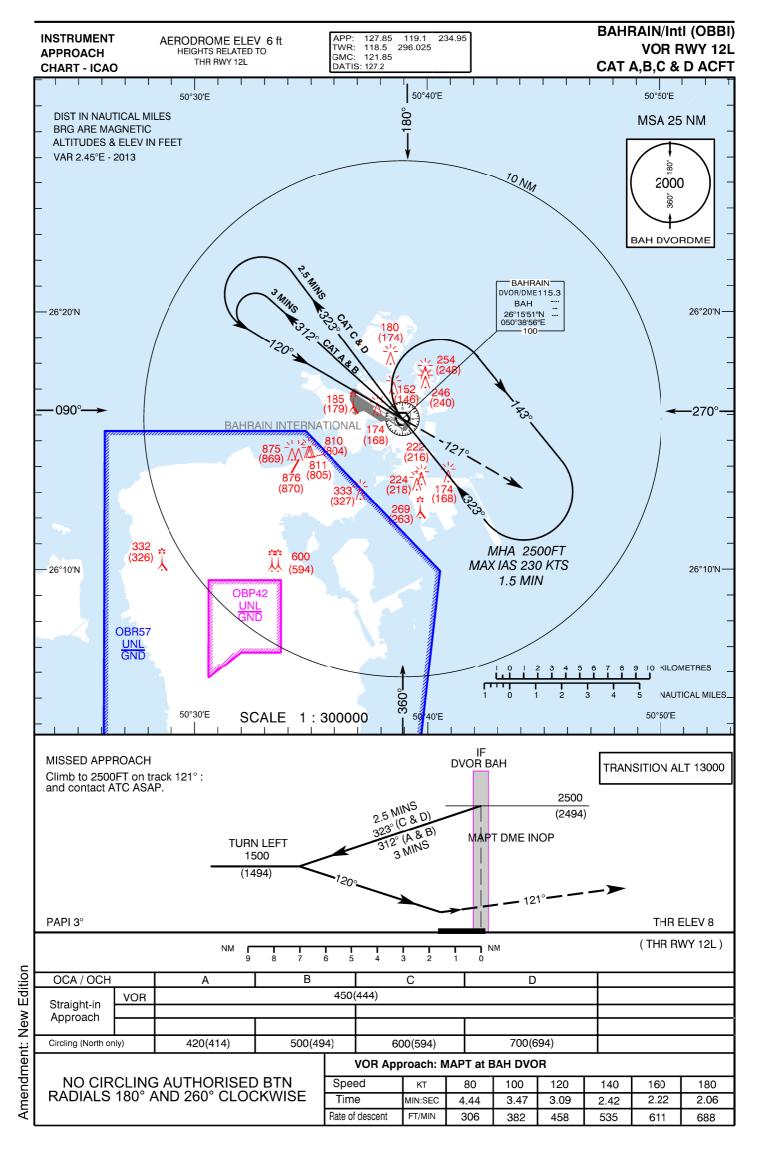


CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

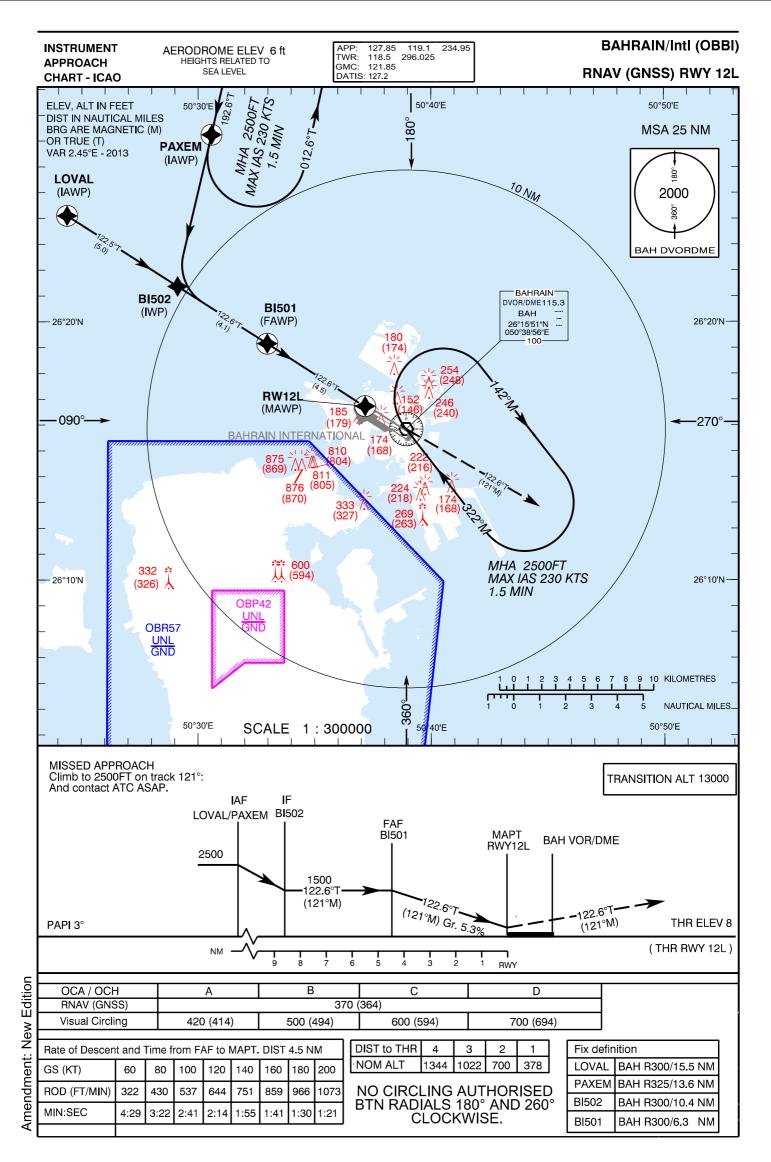


CIVIL AVIATION AFFAIRS

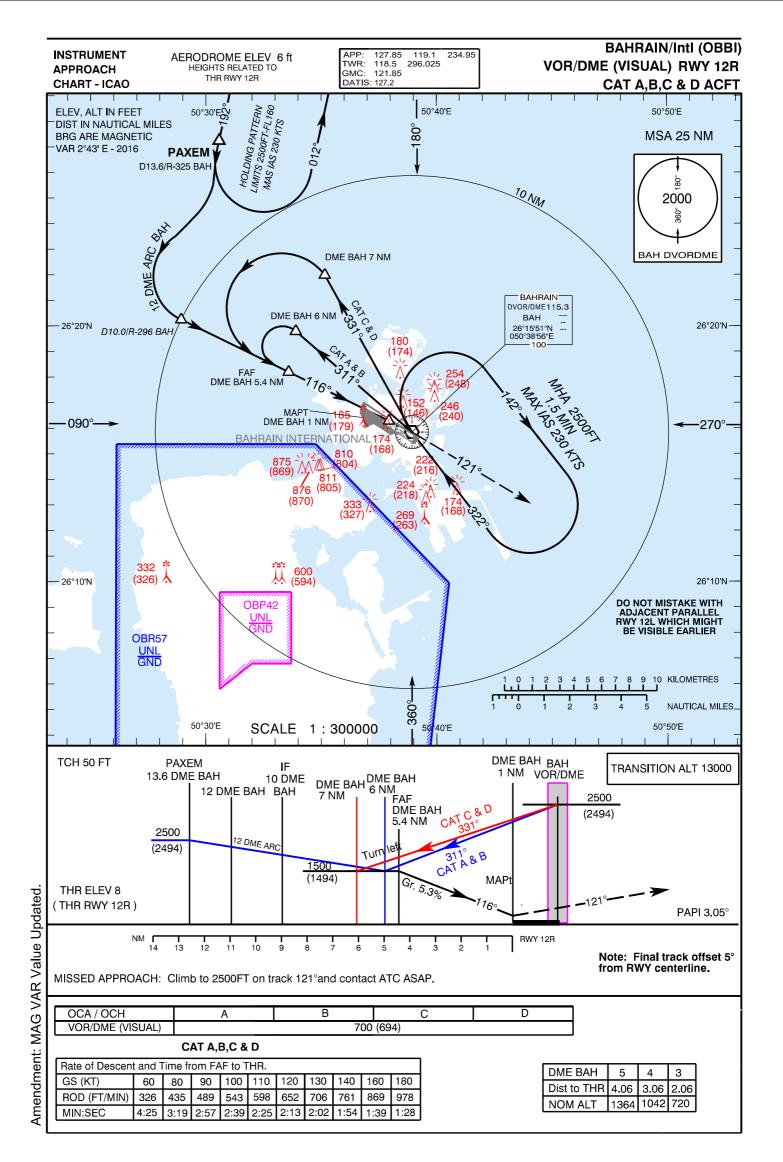


CIVIL AVIATION AFFAIRS


AIRAC AMDT 06/17

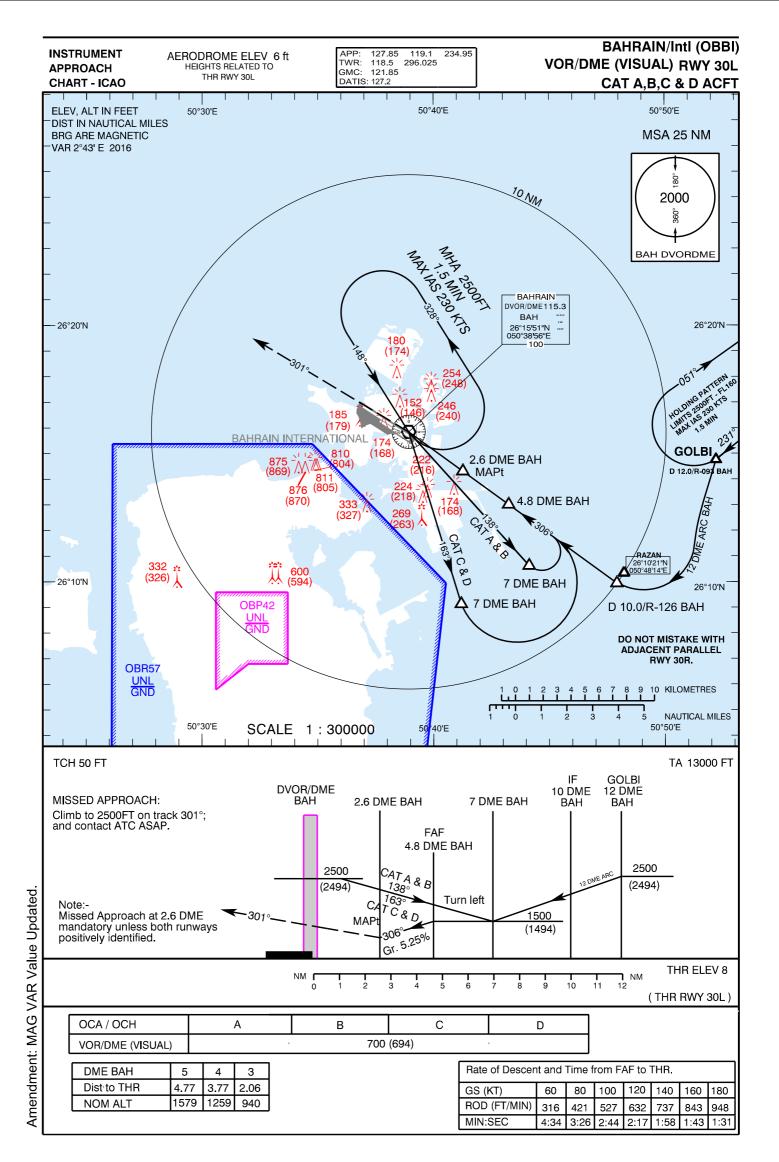

CIVIL AVIATION AFFAIRS


AIRAC AMDT 06/17

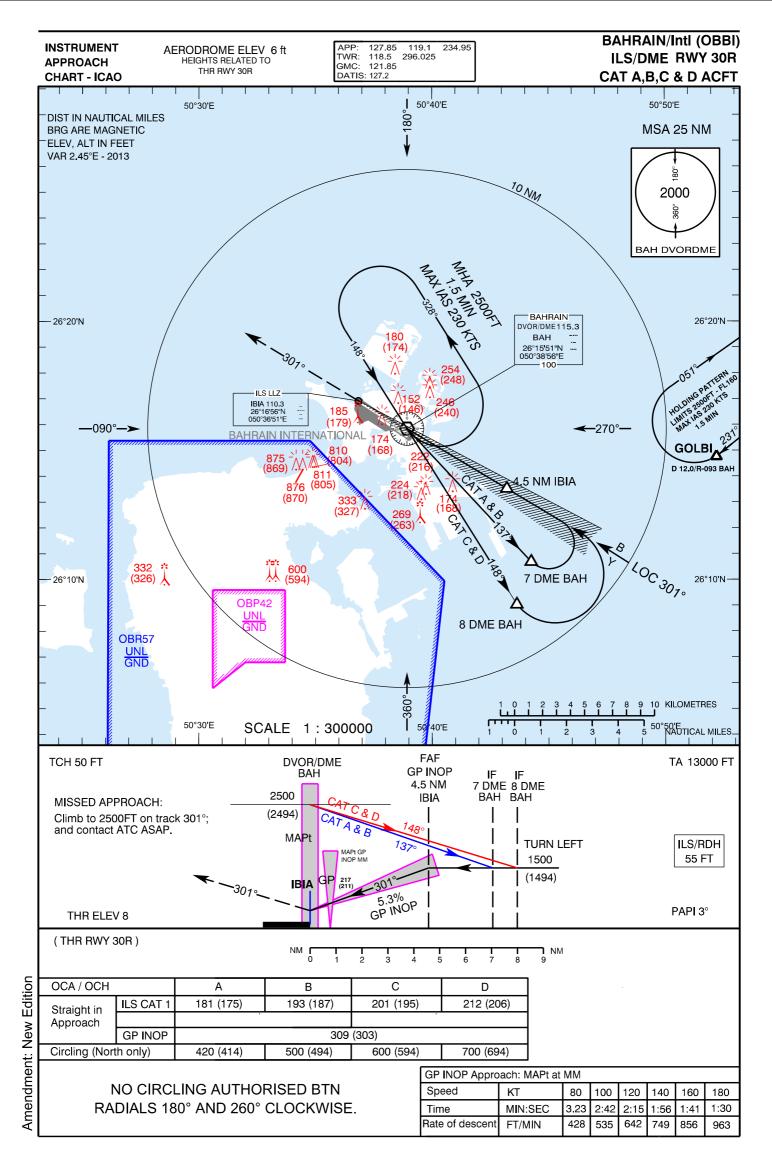

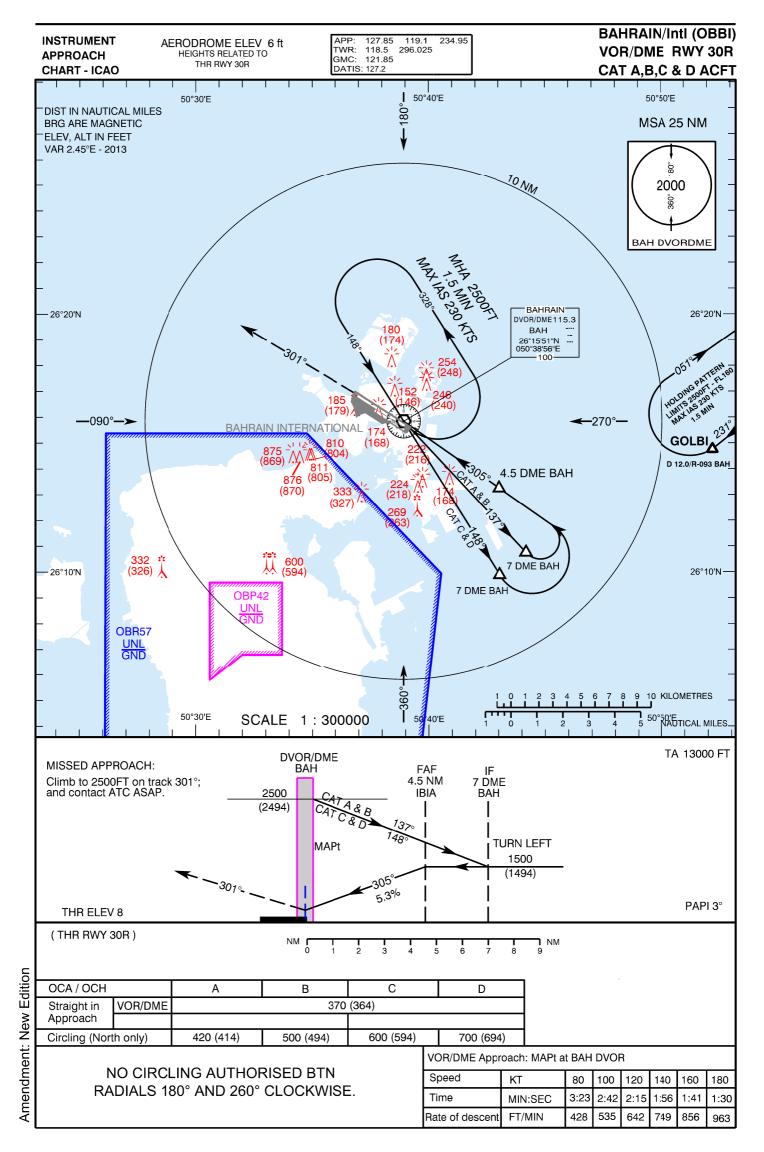


CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

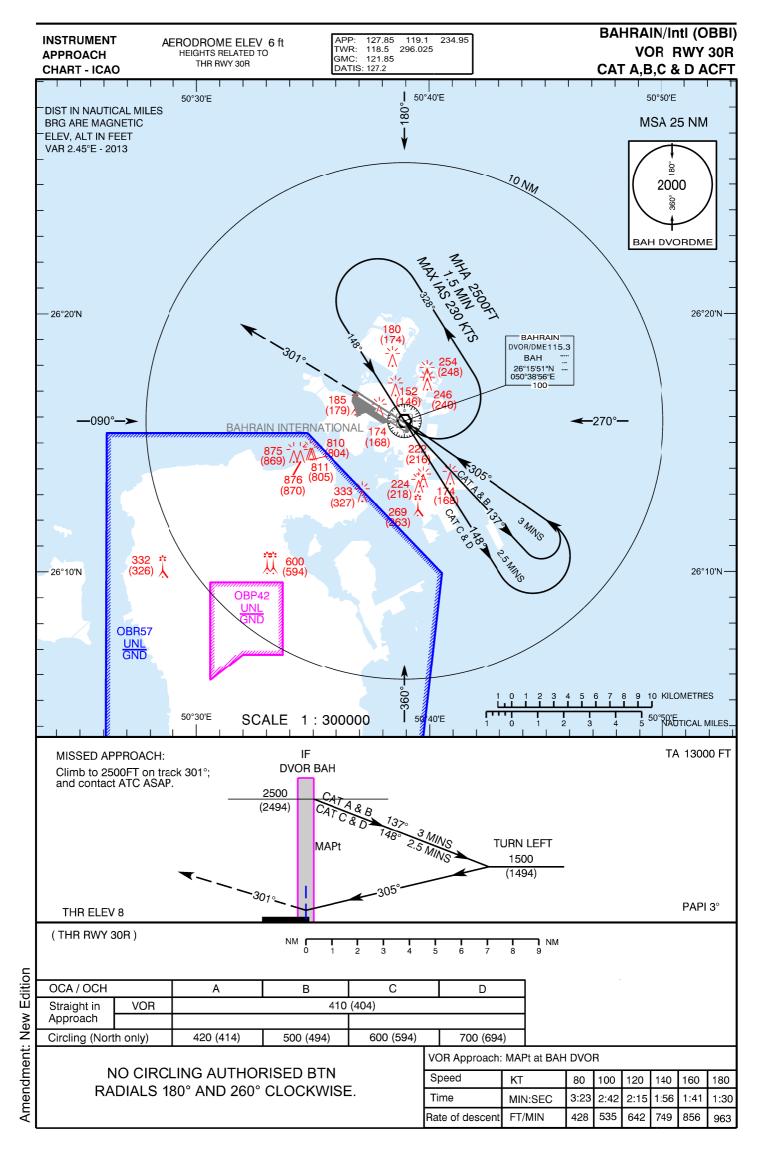


CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

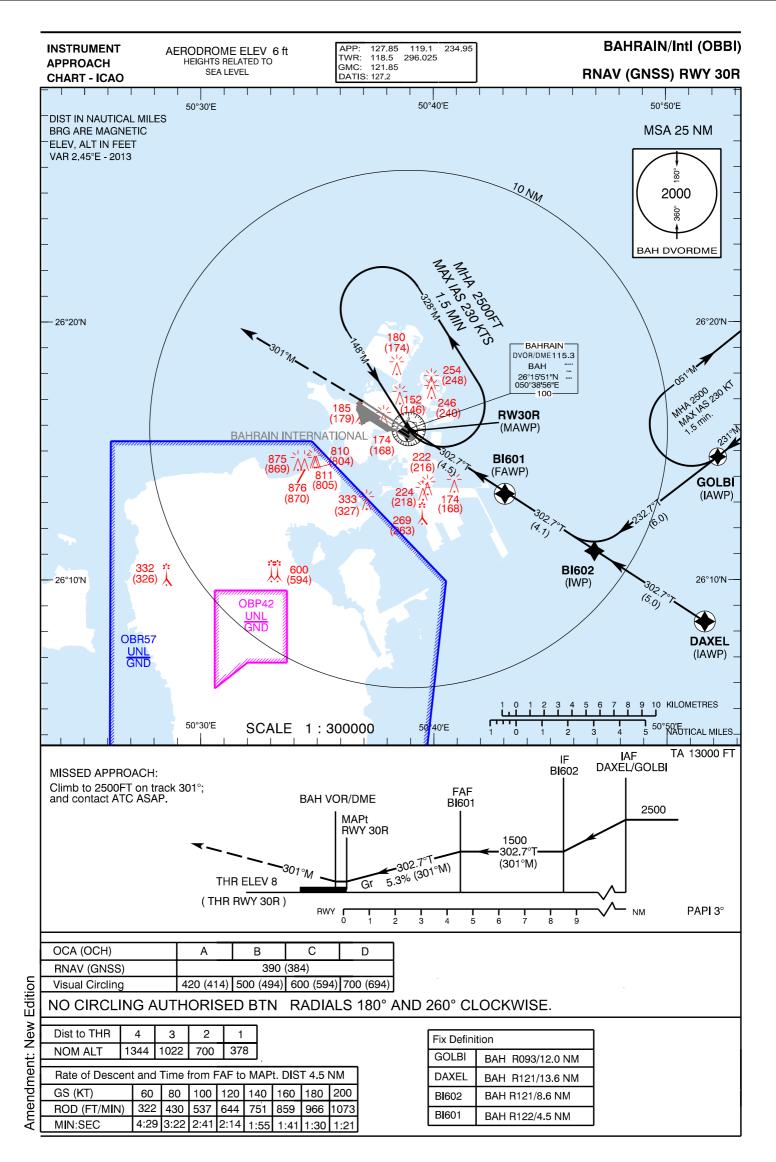

AIP BAHRAIN FIR


AD 2-OBBI-69

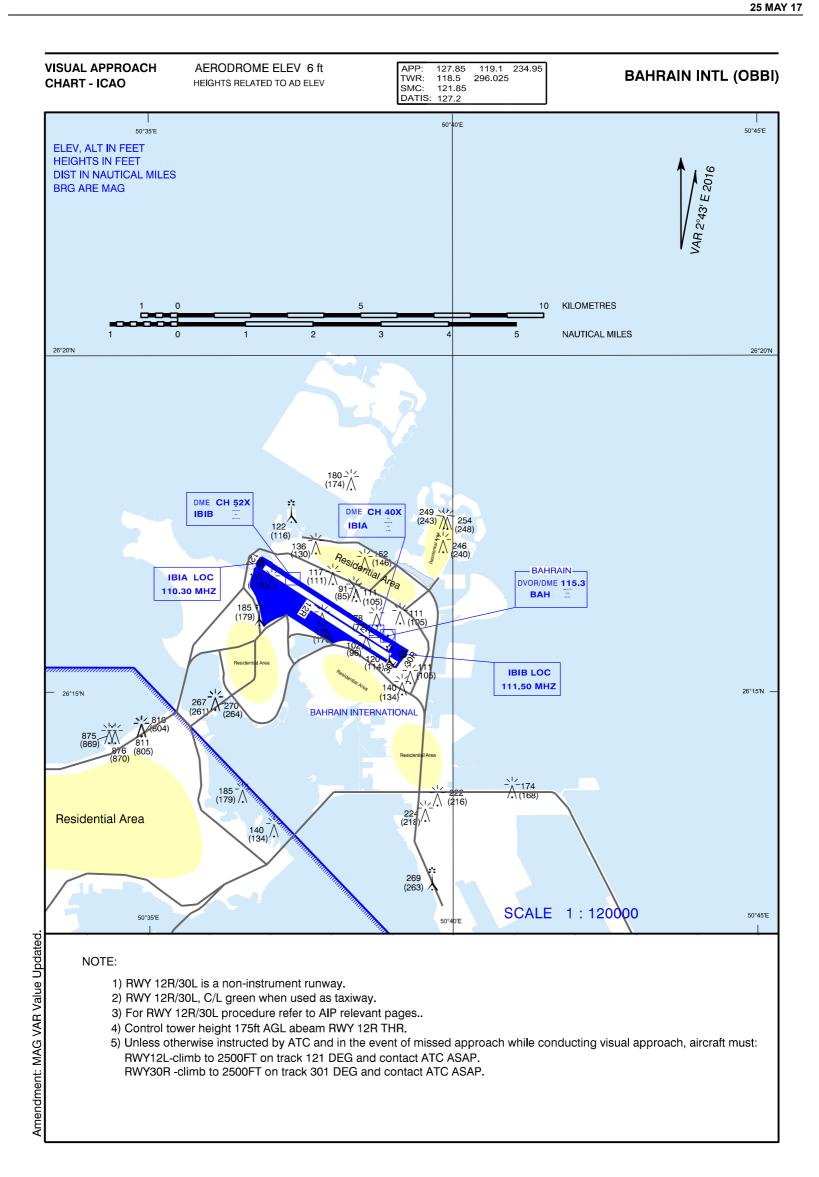

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

AIP BAHRAIN FIR AD 2-OBBI-71 25 MAY 17

BAHRAIN INTL.

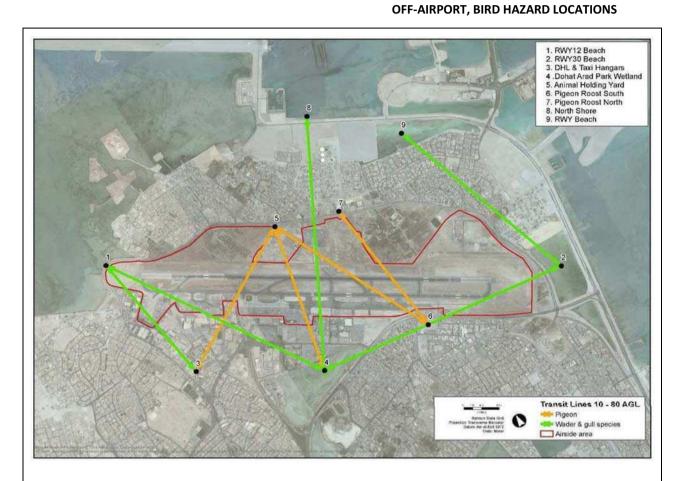

Wildlife Information

- Average mass (kg) of birds per survey at RWY12 Beach Winter: 740kg Summer: 14kg Average mass (kg) of birds per survey at RWY30 Beach Winter: 69kg Summer: 18kg Regular transit paths of pigeon, wader and gull species identified for pilot's attention on approach and departure to Bahrain Intl.


Pilot Use Information

Prior to arrival/departure at BAH request ATC for the presence of birds in the approach and departure paths as well as current wind status request dispersal if location is unacceptable.

Warning:

During periods of rainfall there are significantly higher levels of bird activity within the airport perimeters, especially around areas of standing water. All pilots are advised to maintain vigilance and exercise extreme caution.


CIVIL AVIATION AFFAIRS AIRAC AMDT 06/17

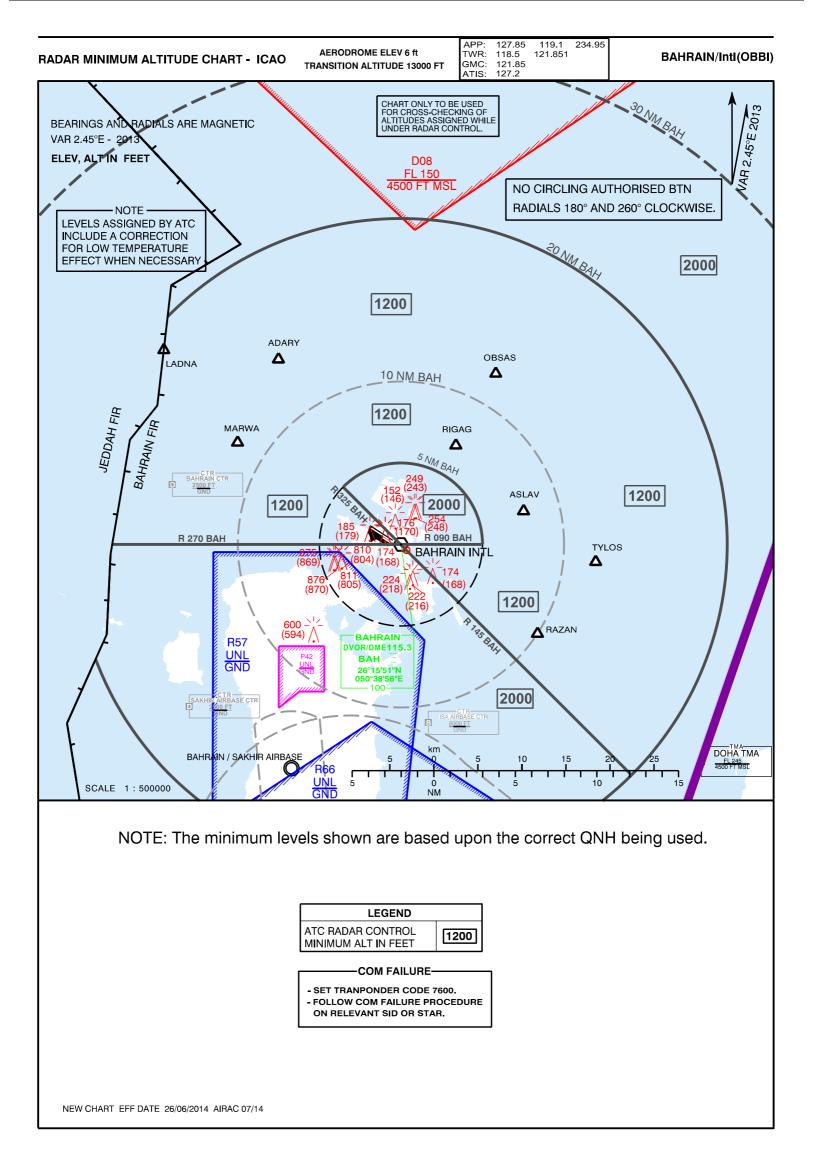

CIVIL AVIATION AFFAIRS

AIP 6th Edition 10/15

AIP BAHRAIN FIR

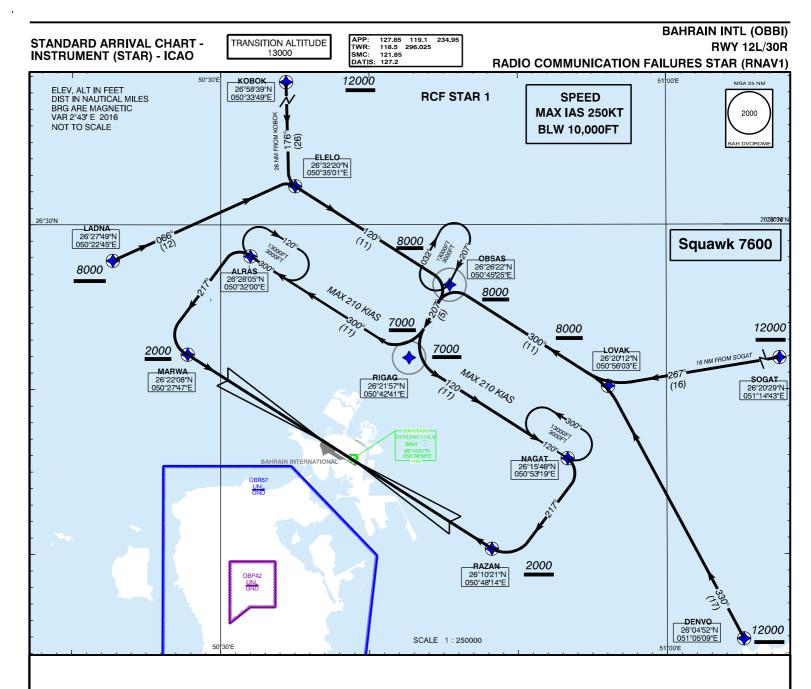

RADIO COMMUNICATION FAILURES STAR (RNAV1)


DENVO RCF 1 ARRIVAL SOGAT RCF 1 ARRIVAL LADNA RCF 1 ARRIVAL KOBOK RCF 1 ARRIVAL

PROCEDURES

Radio Communication Failure: -

- 1- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- 2- Track via latest STAR clearance to the nominated runway, then fly the most suitable approach as advised by ATC.
- 3- Comply with all allocated flight level and altitude as published in this chart.
- 4- No Circling authorised BTN radials 180° and 260° Clockwise.

Amendment: MAG VAR Value Updated.

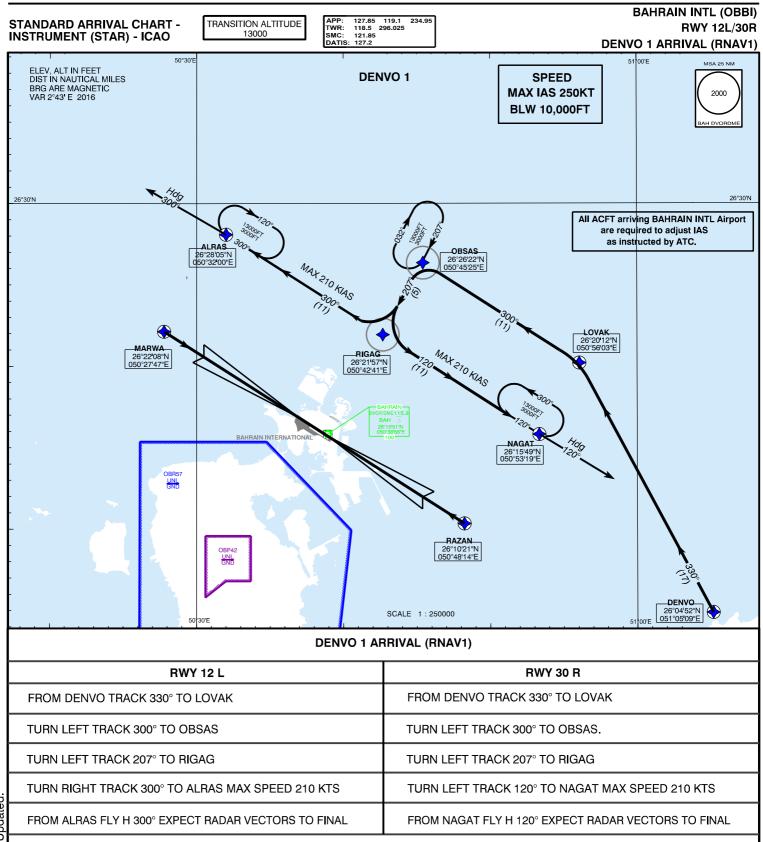


GENERAL PROCEDURES

- 1- Advise Bahrain ATC if unable to comply with the RNAV STAR.
- 2- Request STAR designator, current altitude, and cleared altitude on first contact with Bahrain Approach.
- 3- Maintain altitude assigned by ATC until cleared for the approach.
- 4- Do not expect lower than 7000FT AMSL until past RIGAG.
- 5- No Circling authorised BTN radials 180° and 260° Clockwise.
- 6- ALRAS is a Downwind Termination Waypoint (DTW) for the STAR to RWY 12.
- 7- NAGAT is a Downwind Termination Waypoint (DTW) for the STAR to RWY 30.

Amendment: MAG VAR Value Updated.

AIP BAHRAIN FIR

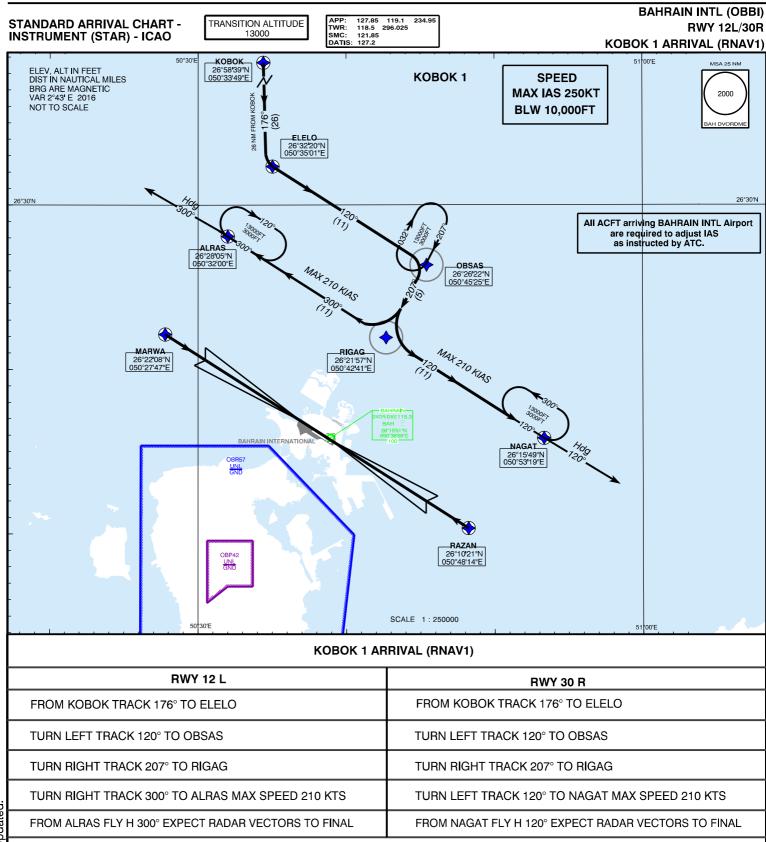


GENERAL PROCEDURES

- 1- Advise Bahrain ATC if unable to comply with the RNAV STAR.
- 2- Request STAR designator, current altitude, and cleared altitude on first contact with Bahrain Approach.
- 3- Maintain altitude assigned by ATC until cleared for the approach.
 4- Do not expect lower than 7000FT AMSL until past RIGAG.
 5- No Circling authorised BTN radials 180° and 260° Clockwise.

- 6- ALRAS is a Downwind Termination Waypoint (DTW) for the STAR to RWY 12.
- 7- NAGAT is a Downwind Termination Waypoint (DTW) for the STAR to RWY 30.

Amendment: MAG VAR Value Updated


AIP BAHRAIN FIR

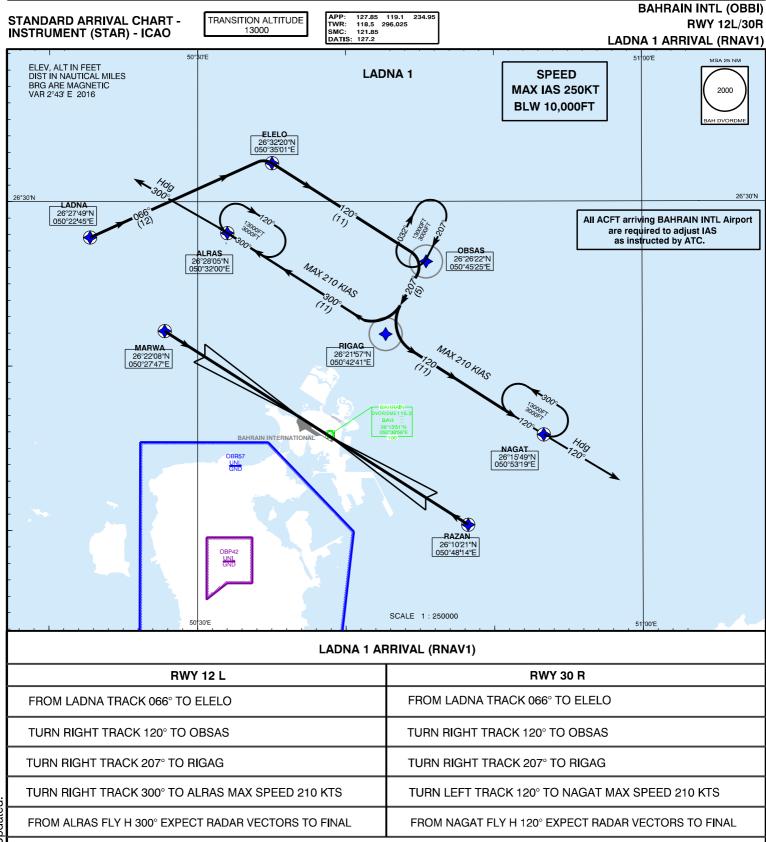

GENERAL PROCEDURES

- 1- Advise Bahrain ATC if unable to comply with the RNAV STAR.
- 2- Request STAR designator, current altitude, and cleared altitude on first contact with Bahrain Approach.
- 3- Maintain altitude assigned by ATC until cleared for the approach.
 4- Do not expect lower than 7000FT AMSL until past RIGAG.
- 5- No Circling authorised BTN radials 180° and 260° Clockwise.
- 6- ALRAS is a Downwind Termination Waypoint (DTW) for the STAR to RWY 12.
- 7- NAGAT is a Downwind Termination Waypoint (DTW) for the STAR to RWY 30.

Amendment: MAG VAR Value Updated,

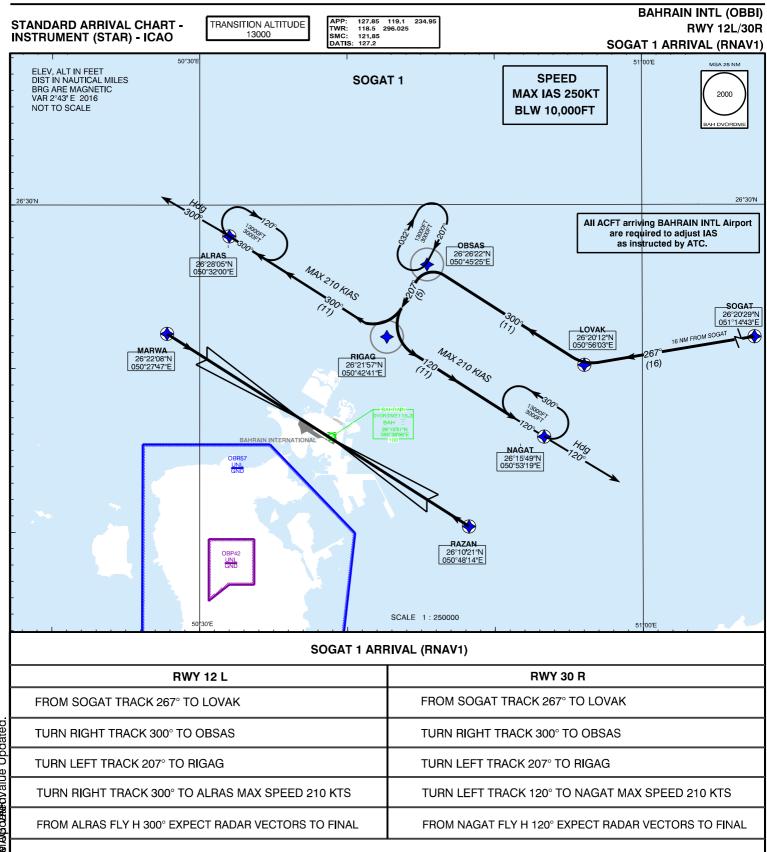

GENERAL PROCEDURES

- 1- Advise Bahrain ATC if unable to comply with the RNAV STAR.
- 2- Request STAR designator, current altitude, and cleared altitude on first contact with Bahrain Approach.
- 3- Maintain altitude assigned by ATC until cleared for the approach.
 4- Do not expect lower than 7000FT AMSL until past RIGAG.
- 5- No Circling authorised BTN radials 180° and 260° Clockwise.
- 6- ALRAS is a Downwind Termination Waypoint (DTW) for the STAR to RWY 12.
- 7- NAGAT is a Downwind Termination Waypoint (DTW) for the STAR to RWY 30.

Amendment: Wax Getral Brokaliuk Alaca Angla Ine Updated

AIP BAHRAIN FIR

AD 2-OBBS-1
26 APR 18

OBBS AD 2.1 AERODROME LOCATION INDICATOR AND NAME

OBBS - BAHRAIN / ISA AIRBASE

OBBS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	255506.11N 0503526.16E, Mid - point of RWY on CL
2	Direction and distance from (city)	18 NM S of Manama
3	Elevation/Reference temperature	139 FT / 39° C
4	Geoid undulation at AD ELEV PSN	NIL
5	MAG VAR/Annual change	2.26 (2011) / 3' per year
6	AD operator, address, telephone, telefax, e-mail address, AFS and website address	Royal Bahrain Air Force Air Operations Centre P.O. Box 245 Kingdom of Bahrain TEL: +973 17894474 Telefax:+973 17620926 AFS: RBAF HQ & OPS OBBSYWYX, RBAF ATC OBBSZTZX, RBAF MET OBBSYMYX
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Emergency Diversion only; otherwise strictly PPO

OBBS AD 2.3 OPERATIONAL HOURS

1	AD Operator	SUN - THU 04:15 - 10:30	
2	Customs and immigration	Prior arrangement	
3	Health and sanitation	Prior arrangement	
4	AIS Briefing Office	by prior arrangement	
5	ATS Reporting Office (ARO)	SUN - THU 04:15 - 10:30 or by prior arrangement	
6	MET Briefing Office	SUN - THU 04:15 - 10:30 or by prior arrangement	
7	ATS	SUN - THU 04:15 - 10:30 or by prior arrangement	
8	Fuelling	Prior arrangement	
9	Handling	Prior arrangement	
10	Security	H24	
11	De-icing	NIL	
12	Remarks	NIL	

OBBS AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	NIL
2	Fuel/oil types	Fuel: AVGAS 100 LL by prior arrangement, Jet A1 by prior arrangement, JP8 Oil: NIL
3	Fuelling facilities/capacity	ET A1 & AVGAS 100LL from Bowser; contract off base vehicle required; JP 8 from on base Bowser
4	De-icing facilities	NIL
5	Hangar space for visiting aircraft	Available in emergency; small aircraft only
6	Repair facilities for visiting aircraft	NIL
7	Remarks	NIL

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

OBBS AD 2.5 PASSENGER FACILITIES

1	1 Hotels In Manama		
2	Restaurants	NIL; food available in emergency	
3	Transportation	Available from BDF in emergency	
4	Medical facilities	First aid; Ambulance; Hospitals in Manama	
5 Bank and Post Office In Manama		In Manama	
6	Tourist Office	In Manama	
7	Remarks	NIL	

OBBS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 7
2	Rescue equipment	4RB (20) available from Coastguard
3	Capability for removal of disabled aircraft	Limited
4	Remarks	NIL

OBBS AD 2.7 SEASONAL AVAILABILITY - CLEARING

ſ	1 Types of clearing equipment		NIL
ſ	2 Clearance priorities		NIL
Ī	3 Remarks		NIL

OBBS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron designation, surface and strength	MAIN: Asphalt, PCN 49 / F / B / X / T	
2	Taxiway designation, width, surface and strength	PARALLEL / REMAINDER: Asphalt, PCN 49 / F / B / X / T	
3	Altimeter checkpoint location and elevation	Holding point RWY 33R: 24 FT Holding point RWY 15L: 135 FT	
4	VOR checkpoints	VOR: NIL	
5	INS checkpoints	Holding Point RWY 33R 255408.40N 0503551.60E THR RWY 33R 255410.69N 0503556.38E Holding Point RWY 15L 255600.36N 0503451.36E THR RWY 15L 255601.55N 0503456.12E 255601.55N: NW corner 255459.28N 0503509.12E SW corner 255448.72N 0503516.32E SE corner 255451.36N 0503522.08E NE corner 255502.52N 0503516.80E	
6	Remarks	NIL	

OBBS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs at all intersections with TWY and RWY at all holding positions Guide lines at APRON
2	RWY and TWY markings	RWY: designation, THR, edge, end as appropriate TWY: holding positions at all TWY / RWY intersections
3	Stop bars	Stop bars where appropriate.
4	Remarks	NIL

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR

AD 2-OBBS-3

17 AUG 17

OBBS AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY NR/Area affected	Obstacle type Elevation Markings/LGT	levation Elevation			
а	b	С	а	b	
NIL			Water Tower 285 FT YES	255550.24N 0503417.84E	NIL
			North Antenna 294 FT YES	255456.22N 0503453.38E	NIL
			South Antenna 263 FT YES	255425.74N 0503509.95E	NIL

OBBS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	BAHRAIN / ISA MET	
2	Hours of service MET Office outside hours	SUN - THU 04:15 - 10:30 or by prior arrangement BAHRAIN MWO	
3	Office responsible for TAF preparation Periods of validity	BAHRAIN MWO As required	
4	Trend forecast Interval of issuance	NIL	
5	Briefing/consultation provided	Detailed TAFs, route forecasts, etc. can be obtained from BAHRAIN MWO at six hours notice	
6	Flight documentation Language(s) used	NIL English	
7	Charts and other information available for briefing or consultation	NIL	
8	Supplementary equipment available for providing information	Facsimile; Automatic sensing and display of W / V; TT; DP; QNH	
9	ATS units provided with information	ISA AIRBASE TOWER, ISA AIRBASE APPROACH RADAR	
10	Additional information (limitation of service, etc.)	NIL	

OBBS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE & MAG BRG	Dimensions of RWY(M)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
15L	154° / 152°	3800 x 45	73 / F / B / X / T Centre portion 56 / R / B / X / T Concrete first 416 M, Asphalt	255601.55N 0503456.12E	136 FT
33R	334° / 332°	3800 x 45	73 / F / B / X / T Centre portion 56 / R / B / X / T Concrete first 416 M, Asphalt	255410.69N 0503556.38E	29 FT
15R	154° / 152°	3678 x 30	46 / F / B / X / T / Asphalt / 47 / R / B / W / T / Concrete	2555.950N 05034.841E 2556.009N 05034.807E	139 FT

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17

Designations RWY NR	TRUE & MAG BRG	Dimensions of RWY(M) Strength (PCN) and surface of RWY and SWY THR coordinates THR geoid undulation		THR elevation and highest elevation of TDZ of precision APP RWY	
1	2	3	4	5	6
33L	334° / 332°	3678 x 30	46 / F / B / X / T / Asphalt / 47 / R / B / W / T / Concrete		28 FT

s	lope of RWY-SWY	SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	OFZ	Remarks
7		8	9	10	11	12
15L	0.502% first 915 M then 0.726 % next 100 M then 1.000% next 2785 M	150 x 45	NIL	4100 x 105	Yes	Load bearing shoulder 30 M
33R	1.000% first 2785 M then 0,726% next 100 M then 0,502% next 915 M	150 x 45	NIL	4100 x 105	Yes	Load bearing shoulder 30 M
15R	NIL	NIL	NIL	3678 x 30	No	NIL
33L	NIL	NIL	NIL	3678 x 30	No	NIL

OBBS AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks	
1	2	3	4	5	6	
15L	3800	3800	3950	3800	NIL	
33R	3800	3800	3950	3800	NIL	
15R	3678	3678	3799	3678	NIL	
33L	3678	3678	3800	3678	NIL	
Landing THR runway 15R permanently displaced by 122M and 33L by 121M.						

OBBS AD 2.14 APPROACH AND RUNWAY LIGHTING

•	RWY Designator	APCH LGT type LEN INTST	THR LGT colour WBAR	VASIS (MEHT) PAPI	TDZ, LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour INTST	RWY End LGT colour WBAR	SWY LGT LEN (M) colour	Remarks
	1	2	3	4	5	6	7	8	9	10
	15L	NIL	Green	PAPI RIGHT 3° 75 FT	NIL	NIL	3800 M omnidi- rectional White LIH	Red	NIL	Illuminated distance to go boards every 1000 FT
	33R	ICAO CAT I precision approach lighting system and Strobe sequence lights	Green	PAPI LEFT 3° 77 FT	NIL	NIL	3800 M omnidi- rectional White LIH	Red	NIL	Illuminated distance to go boards every 1000 FT

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS

17 AUG 17

RWY Designator	APCH LGT type LEN INTST	THR LGT colour WBAR	VASIS (MEHT) PAPI	TDZ, LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour INTST	RWY End LGT colour WBAR	SWY LGT LEN (M) colour	Remarks
1	2	3	4	5	6	7	8	9	10
15R	NIL	Green	PAPI RIGHT 3°	NIL	NIL	3678 M omnidi- rectional White LIH	Red	NIL	NIL
33L	NIL	Green	PAPI LEFT 3°	NIL	NIL	3678 M omnidi- rectional White LIH	Red	NIL	NIL

Note:

Runway Marking:

Runway edge line, runway end line, dashed centre-line THR, TDZ and designators markings.

Runway 15R/33L turning head:

Dimension: 28.5 M wide, turning circle radius 14.25 M painted guideline for turning manoeuvre not lit at night.

OBBS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and operational hours	NIL
2	LDI location and LGT Anemometer location and LGT	NIL
3	TWY lighting	NIL
4	Secondary power supply/switch-over time	NIL
5	Remarks	NIL

OBBS AD 2.16 HELICOPTER LANDING AREA

1	Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	TLOF and/or FATO elevation M/FT	NIL
3	TLOF and FATO area dimensions, surface, strength, marking	NIL
4	True BRG of FATO	NIL
5	Declared distance available	NIL
6	APP and FATO lighting	NIL
7	Remarks	As directed by ATC

OBBS AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	The area bounded by an arc of 10 NM radius centred on SIA VORTAC (255518.60N 0503525.82E) from 360° anti-clockwise to 250°, and that part of an arc of 15 NM radius from 250° anti-clockwise to 360° which is within the military airspace described in ENR 2.2.
2	Vertical limits	SFC - 8000 FT
3	Airspace classification	В
4	ATS unit call sign Language(s)	ISA AIRBASE TOWER, ISA AIRBASE APPROACH RADAR English
5	Transition altitude	13000 FT

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17

6	Hours of applicability	но
7	Remarks	QNH is used. Vertical positions expressed in FT
8	Note	RBAF authorities are responsible for Air Traffic Services within Bahrain territorial airspace East of Jeddah FIR, West of Doha TMA and south of line. 255405N 0505543E - 260457N 0503655E - 260457N 0501615E This line is commonly referred to as referred to as "OBSOBI" line.

OBBS AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Channel	Hours of operation	Remarks
1	2	3	4	5
APP / TAR	ISA AIRBASE APPROACH RADAR	124.95 MHZ	SUN - THU 04:15 - 10:30 or by prior arrangement	NIL
		358.15 MHZ	SUN - THU 04:15 - 10:30 or by prior arrangement	NIL
TWR	ISA AIRBASE TOWER	125.45 MHZ	SUN - THU 04:15 -10:30 or by prior arrangement	NIL
		364.15 MHZ	SUN - THU 04:15 -10:30 or by prior arrangement	NIL
VOLMET	BAHRAIN VOLMET	128.8MHZ	H24	Bahrain Civil

OBBS AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, CAT of ILS/MLS (For VOR/ILS/ MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates		Elevation of DME transmitting antenna	Remarks
1	2	3	4		5	6	7
VORTAC (2°E / 1996)	SIA	117.6MHZ CH 123 X	H24	255518.60N	0503525.82E	136FT	NIL
L (2°E / 1996)	SI	343 KHZ	H24	255339.46N	0503613.34E		152° MAG 0.6 NM FM THR RWY 33R
ILS LOC RWY 33R CAT I NIL	ISIB	110.15MHZ	H24	255608.84N	0503452.16E		332° MAG 2.2 NM FM THR RWY 33R
GP RWY 33R		334.25 MHZ	H24	255420.22N	0503554.41E		3°, RDH 55 FT
MM RWY 33R		75 MHZ	H24	255340.05N	0503613.02E		152° MAG 0.57 NM FM THR RWY 33R
APP / TAR	ISA AIRBASE APPROACH RADAR						In an emergency an IFR approach to RWY 15L can be made following Radar vectors and altitudes to a point 3 NM from touchdown on the final approach track at 1000 FT (QNH). At this point a Visual Approach may be completed or a missed approach executed.

AIRAC AMDT 09/17 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR

AD 2-OBBS-7
17 SEP 15

OBBS AD 2.20 LOCAL AERODROME REGULATIONS

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

AD 2-OBBS-8
17 SEP 15
AIP BAHRAIN FIR

OBBS AD 2.21 NOISE ABATEMENT PROCEDURES

NIL

AIP BAHRAIN FIR

AD 2-OBBS-9
17 SEP 15

OBBS AD 2.22 FLIGHT PROCEDURES

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

AD 2-OBBS-10
AIP BAHRAIN FIR
17 SEP 15

OBBS AD 2.23 ADDITIONAL INFORMATION

NIL

AIP BAHRAIN FIR

AD 2-OBBS-11
17 AUG 17


OBBS AD 2.24 CHARTS RELATED TO AN AERODROME

Chart name Page

IAC - ICAO RWY 33R VOR DME ILS ALL ACFT CAT

AD 2-OBBS-13

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17

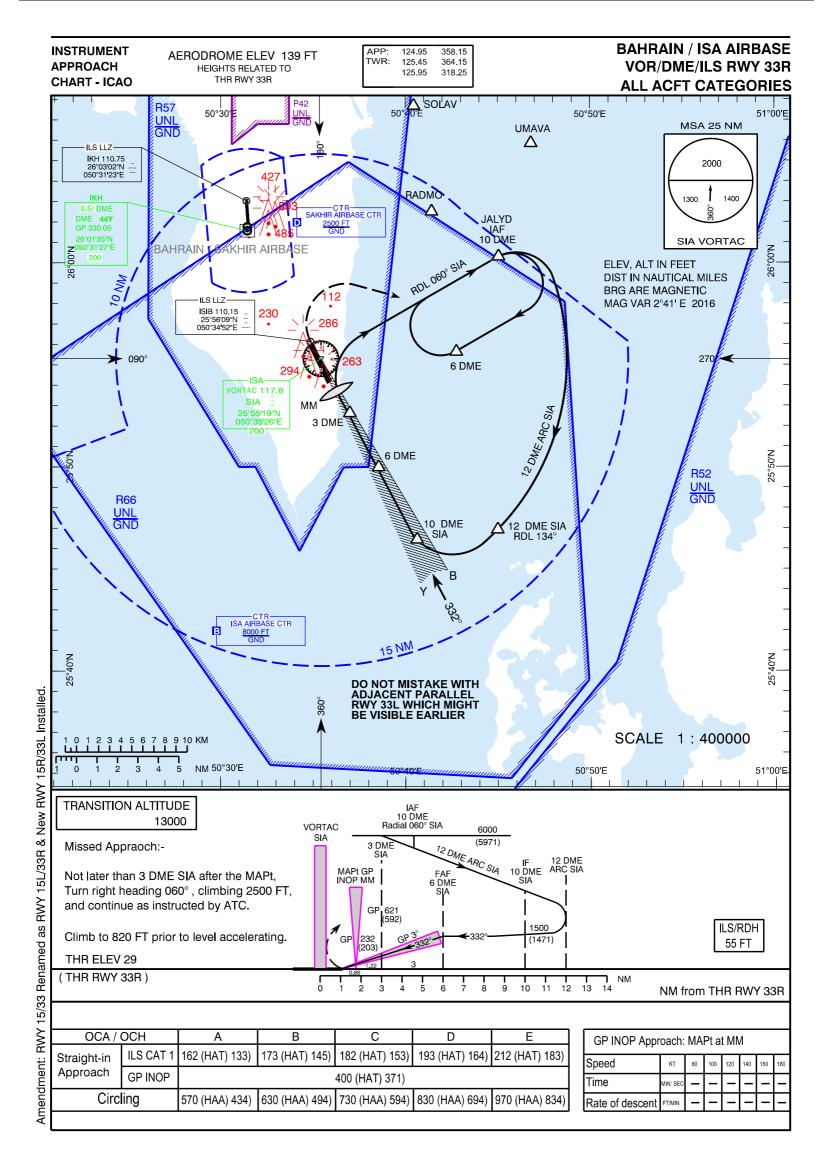

CIVIL AVIATION AFFAIRS

AIRAC AMDT 09/17

AIP BAHRAIN FIR

AD 2-OBKH-1
26 APR 18

OBKH AD 2.1 AERODROME LOCATION INDICATOR AND NAME

OBKH - BAHRAIN / SAKHIR AIRBASE

OBKH AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	260205N 0503128E Mid - point of RWY on CL		
2	Direction and distance from (city)	12 NM SW of Manama		
3	Elevation/Reference temperature	76 FT / 39°C		
4	Geoid undulation at AD ELEV PSN	NIL		
5	MAG VAR/Annual change	2.26 (2011) / 3' per year		
6	AD operator, address, telephone, telefax, e-mail address, AFS and website address	Royal Bahrain Air Force Air Operations Centre P.O. Box 245 Kingdom of Bahrain TEL: +973 17894474 Telefax:+973 17620926 AFS: RBAF HQ & OPS OBBSYWYX, RBAF ATC OBBSZTZX, RBAF MET OBBSYMYX		
7	Types of traffic permitted (IFR/VFR)	IFR/VFR		
8	Remarks	Military Airbase; Traffic otherwise strictly PPR		

OBKH AD 2.3 OPERATIONAL HOURS

1	AD Operator	SUN - THU 0415 - 1030	
2	Customs and immigration	но	
3	Health and sanitation	но	
4	AIS Briefing Office	но	
5	ATS Reporting Office (ARO)	SUN - THU 0415 - 1030	
6	MET Briefing Office	SUN - THU 0415 - 1030	
7	ATS	SUN - THU 0415 - 1030	
8	Fuelling	но	
9	Handling	но	
10	Security	H24	
11	De-icing	NIL	
12	Remarks	NIL	

OBKH AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	NIL	
2	Fuel/oil types	Fuel: Jet A1 by prior arrangement, AVGAS 100 LL by prior arrangement, JP8 Oil: NIL	
3	Fuelling facilities/capacity	Jet A1 and AVGAS 100LL from bowser; contract off base vehicle required; JP 8 from on base bowser	
4	De-icing facilities	NIL	
5	Hangar space for visiting aircraft	NIL	
6	Repair facilities for visiting aircraft	NIL	

CIVIL AVIATION AFFAIRS AIRAC AMDT 05/18

OBKH AD 2.5 PASSENGER FACILITIES

1	Hotels	In Manama	
2	Restaurants	NIL; food available in emergency	
3 Transportation Available from BDF in emergency		Available from BDF in emergency	
4	Medical facilities	First aid; Ambulance; Hospitals in Manama	
5	Bank and Post Office	In Manama	
6	Tourist Office	In Manama	
7	Remarks	NIL	

OBKH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Up to CAT 9 O / R	
2	Rescue equipment	4 RB (20) available from coastguard	
3	Capability for removal of disabled aircraft	Limited	
4	Remarks	NIL	

OBKH AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	1 Types of clearing equipment		NIL
2	2 Clearance priorities		NIL
3	3 Remarks		NIL

OBKH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron designation, surface and strength	MAIN NORTH: Concrete, PCN 74 / R / A / W / T MAIN SOUTH: Asphalt, PCN 60 / F / A / W / T		
2	Taxiway designation, width, surface and strength	TWY A, TWY B, TWY C, TWY D: 23 M TWY A, TWY B, TWY D: Asphalt, PCN 52 / F / /A / X / T TWY C: Asphalt, PCN 52 / F / A / X / T south of TWY D and Asphalt, PCN 40 / F / A / X / T north of TWY D		
3	Altimeter checkpoint location and elevation	Holding Point RWY 17: Hold A 63 FT, Hold B 61 FT		
4	VOR checkpoints	NIL		
5	INS checkpoints	Holding Point A 63 FT 260255.88N 05031280.11E , Holding Point B 61 FT 260245.67N 0503128.82E Parking Ramp: NIL Stands: On request		
6	Remarks	NIL		

OBKH AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs. Guide lines at apron.	
2	RWY and TWY markings	RWY: Designation, THR, edge, end as appropriate TWY: Edge, holding positions at all TWY / RWY Intersections	
3	Stop bars	NIL	

AIRAC AMDT 06/16 CIVIL AVIATION AFFAIRS

AIP BAHRAIN FIR

AD 2-OBKH-3
26 MAY 16

4 Remarks Holding position markings and guard lights

OBKH AD 2.10 AERODROME OBSTACLES

	In approach/TKOF	areas	In circling are	Remarks	
	1		2		3
RWY NR/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
а	b	С	а	b	
17 DEP	Tower 290 FT YES Tower 320 FT YES	1.9 NM FM DER 17 RIGHT OFFSET 700 M 255914.71N 0503117.60E 2.3 NM DER 17 LEFT OFFSET 107 M 255854.48N 0503147.77E	NIL	NIL	NIL
35 DEP	Water Tower 270 FT YES Spire 260 FT YES Flagpole 540 FT YES	1.5 NM FM DER 35 LEFT OFFSET 400 M 260423.87N 0503100.93E 1.3 NM FM DER 35 RIGHT OFFSET 530 M 260416.58N 0503136.52E 4 NM FM DER 35 RIGHT NIL OFFSET 260654.16N 0503104.25E			

OBKH AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	BAHRAIN / ISA MET		
2	Hours of service MET Office outside hours	SUN - THU 0415 - 1030 BAHRAIN MWO		
3	Office responsible for TAF preparation Periods of validity	BAHRAIN MWO As required		
4	Trend forecast Interval of issuance	N/A N/A		
5	Briefing/consultation provided	Detailed TAFs, route forecasts, etc. can be obtained from BAHRAIN MWO at six hours notice		
6	Flight documentation Language(s) used	NIL English		
7	Charts and other information available for briefing or consultation	NIL		
8	Supplementary equipment available for providing information	Facsimile: Automatic sensing and display of W / V; TT; DP; QNH; QFE.		
9	ATS units provided with information	SAKHIR TOWER		
10	Additional information (limitation of service, etc.)	NIL		

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/16

OBKH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designation s RWY NR	TRUE & MAG BRG	Dimensions of RWY(M)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
17	175° / 173°	3200 x 45	52 / F / A / X /T Asphalt	Landing THR: 260256.553N 0503123.907E RWY end: 260256.554N 0503123.908E -9.96 M	57FT / 17.36 M
35	355 / 353	3200 x 45	52 / F / A / X /T Asphalt	Landing THR: 260122.594N 0503131.857E RWY end: 260112.932N 0503132.674E -4.43 M	76FT / 23.28 M

	Slope of RWY-SWY	SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	OFZ	Remarks
	7	8	9	10	11	12
0%	NIL	NIL	NIL	3320 x 300	NIL	Load bearing shoulders 7.5 M either side of run- way with an additional 15 M non - load bearing surface stabilization as- phalt
0%	NIL	NIL	NIL	3320 x 300	NIL	Load bearing shoulders 7.5 M either side of run- way with an additional 15 M non - load bearing surface stabilization as- phalt

OBKH AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
17	3200	3200	3200	3200	NIL
35	3200	3200	3200	2900	NIL

OBKH AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	THR LGT colour WBAR	VASIS (MEHT) PAPI	TDZ, LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour INTST	RWY End LGT colour WBAR	SWY LGT LEN (M) colour	Remarks
1	2	3	4	5	6	7	8	9	10
17	Simple approach lighting system 420 M	Green	PAPI LEFT 3° 75 FT	NIL	NIL	3200 M 60 M omnidirectional White LIH	Red	NIL	NIL

RWY Designator	APCH LGT type LEN INTST	THR LGT colour WBAR	VASIS (MEHT) PAPI	TDZ, LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour INTST	RWY End LGT colour WBAR	SWY LGT LEN (M) colour	Remarks
1	2	3	4	5	6	7	8	9	10
35	ICAO CAT I precision approach lighting sys- tem 900 M	Green	PAPI LEFT 3° 77 FT	NIL	NIL	3200 M 60 M om- nidirectional White LIH	Red	NIL	NIL

OBKH AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and operational hours	NIL
2	LDI location and LGT Anemometer location and LGT	NIL W THR 35 & E THR 17, LGT
3	TWY lighting	Blue Edge, holding position Guard lights, Runway intersections
4	Secondary power supply/switch-over time	10 sec
5	Remarks	Blue Apron edge lights

OBKH AD 2.16 HELICOPTER LANDING AREA

1	Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	TLOF and/or FATO elevation M/FT	NIL
3	TLOF and FATO area dimensions, surface, strength, marking	NIL
4	True BRG of FATO	NIL
5	Declared distance available	NIL
6	APP and FATO lighting	NIL
7	Remarks	As directed by ATC

OBKH AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	SAKHIR AIRBASE CTR; centered at ARP (260205N 0503128E) and orientated parallel to RWY (353 / 173 degrees magnetic) extending 7.0 NM in length and 4 NM wide defined by Coordinates 255901N 0502932E - 260446N 0503128E0502857E following an arc of radius 3.5 NM centered on 260205N 0503128E (ARP) to 260508N 0503323E - 255923N 0503358E following an arc of 3.5 NM radius centered on 260205N 0503128E (ARP) to Origin.
2	Vertical limits	SFC - 2500 FT
3	Airspace classification	D
4	ATS unit call sign Language(s)	SAKHIR TOWER English
5	Transition altitude	13000 FT
6	Hours of applicability	но
7	Remarks	QNH is used. Vertical positions expressed in FT

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

OBKH AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Channel	Hours of operation	Remarks
1	2	3	4	5
APP / TAR	ISA AIRBASE AP- PROACH RADAR	124.95 MHZ	SUN - THU 0415 - 1030	NIL
		358.15 MHZ	SUN - THU 0415 - 1030	
TWR	SAKHIR TOWER	118.15 MHZ	SUN - THU 0415 - 1030	NIL
		317.25 MHZ	SUN - THU 0415 - 1030	
VOLMET	BAHRAIN VOLMET	128.8 MHZ	H24	Bahrain Civil

OBKH AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, CAT of ILS/MLS (For VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
ILS LOC RWY 35 CAT I (2°E / 2011)	IKH	110.75MHZ	H24	260302.191N 0503123.429E		NIL
GP RWY 35		330.05 MHZ	H24	260134.614N 0503126.536E		3°, 56FT / RDH 16.9 M
DME RWY 35	IKH	44Y	H24	260134.61N 0503126.54E	126FT / 50 FT AGL	Co - located with GP

AIP BAHRAIN FIR

AD 2-OBKH-7
17 SEP 15

OBKH AD 2.20 LOCAL AERODROME REGULATIONS

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

OBKH AD 2.21 NOISE ABATEMENT PROCEDURES

Avoid overflight of OBP42 area to North of OBKH. RWY 35 MA turn at 3.0 DME. Minimum angle of bank 020°, maximum IAS 185 KT.

AIP BAHRAIN FIR AD 2-OBKH-9
17 SEP 15

OBKH AD 2.22 FLIGHT PROCEDURES

ARRIVALS RWY 35 VIA EAST COAST OF BAHRAIN:

Plan arrival via OBBI. Expect radar vectors for JALYD (260002.0N 0504513.0E) thence KH35E (255001.38N 0503742.78E) to intercept of OBKH LOC or continue using RNAV GNSS approach.

ARRIVALS RWY 17

RWY 17 approaches will be utilized only in the event that adverse winds preclude the use of RWY 35. In the event that RWY 17 is used, aircraft will be radar vectored to north of BAHRAIN INTERNATIONAL airport and positioned for a straight - in approach to RWY 17 either by Visual approach or RNAV GNSS approach.

DEPARTURE RWY 35:

Track 353 DEG MAG
At 3.0 DME
Turn right MIN AoB 020 DEG MAX IAS 185 KT
Track DCT JALYD (260002.0N 0504513.0E)
Climb to 4000 FT, or as advised by ATC.

DEPARTURE RWY 17:

Track 173 DEG MAG Climb to 700 FT Turn left but not before DER Climb to 4000 FT Track to JALYD (260002.0N 0504513.0E). Or as advised by ATC.

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

OBKH AD 2.23 ADDITIONAL INFORMATION

Preferred operations: RWY 35 arrivals, RWY 17 departures.


AIP BAHRAIN FIR


AD 2-OBKH-11
26 MAY 16


OBKH AD 2.24 CHARTS RELATED TO AN AERODROME

Chart name	Page
AERODROME GROUND MOVEMENT	AD 2-OBKH-13
SID - ICAO RWY 17 / 35	AD 2-OBKH-15
IAC - ICAO RWY 17 RNAV GNSS ALL ACFT CAT	AD 2-OBKH-17
IAC - ICAO RWY 35 ILS DME ALL ACFT CAT	AD 2-OBKH-19
IAC - ICAO RWY 35 RNAV GNSS ALL ACFT CAT	AD 2-OBKH-21
RNAV (GNSS) WAYPOINTS RWY 17 / 35 IFP	AD 2-OBKH-23

CIVIL AVIATION AFFAIRS AIRAC AMDT 06/16

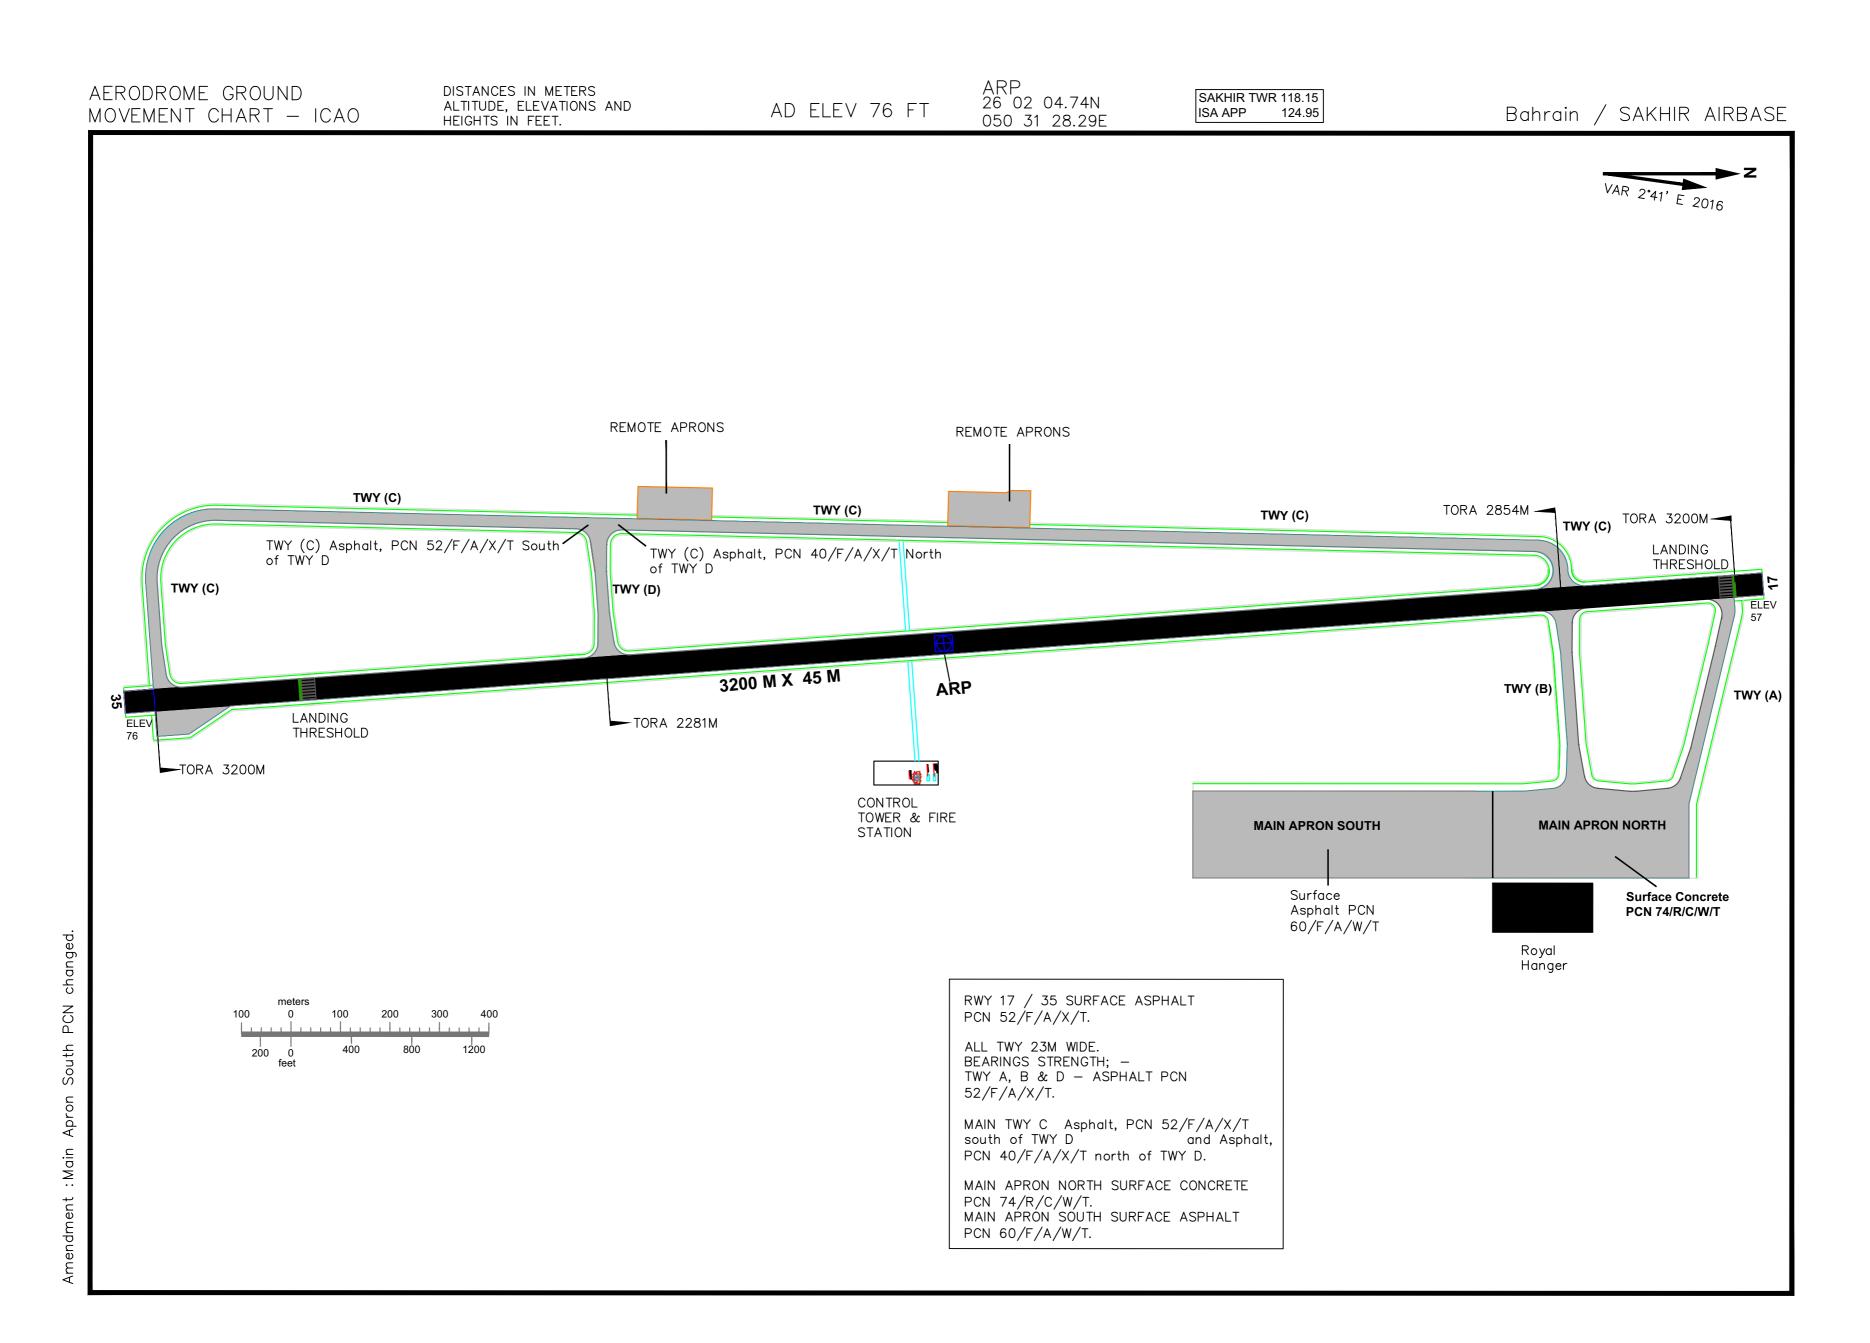


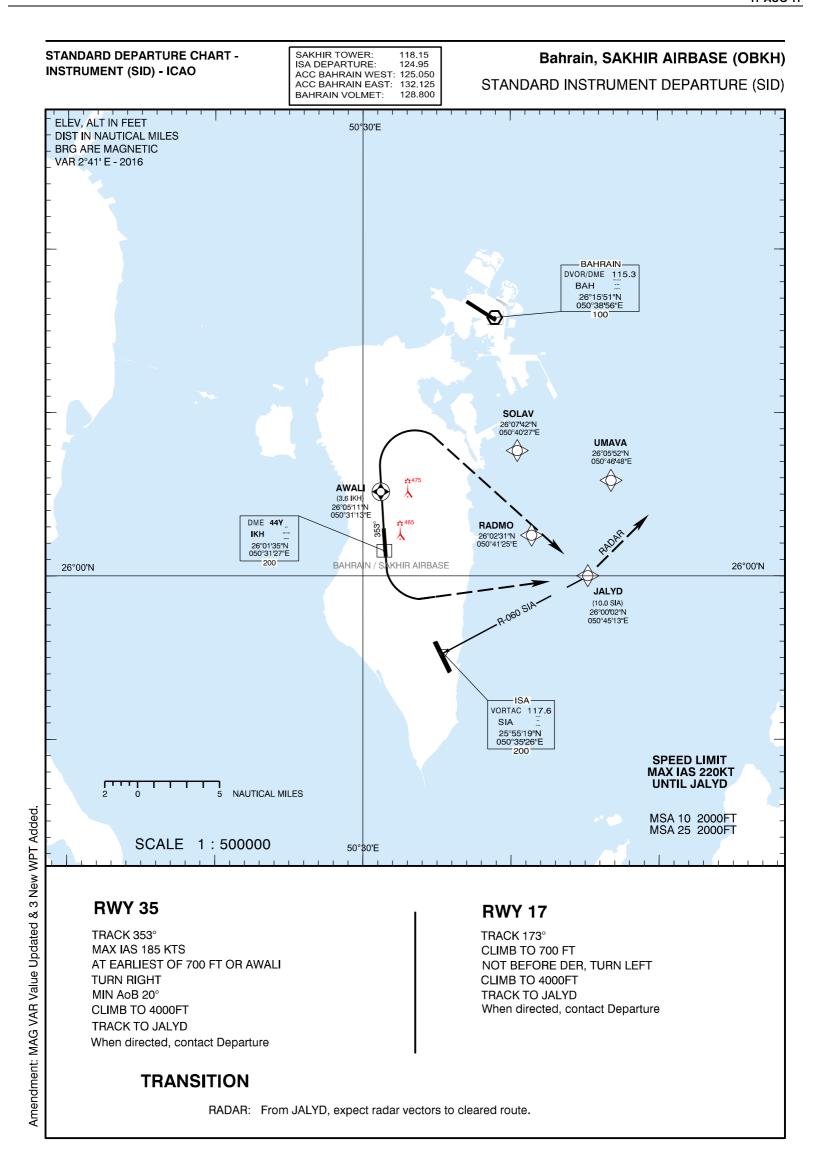

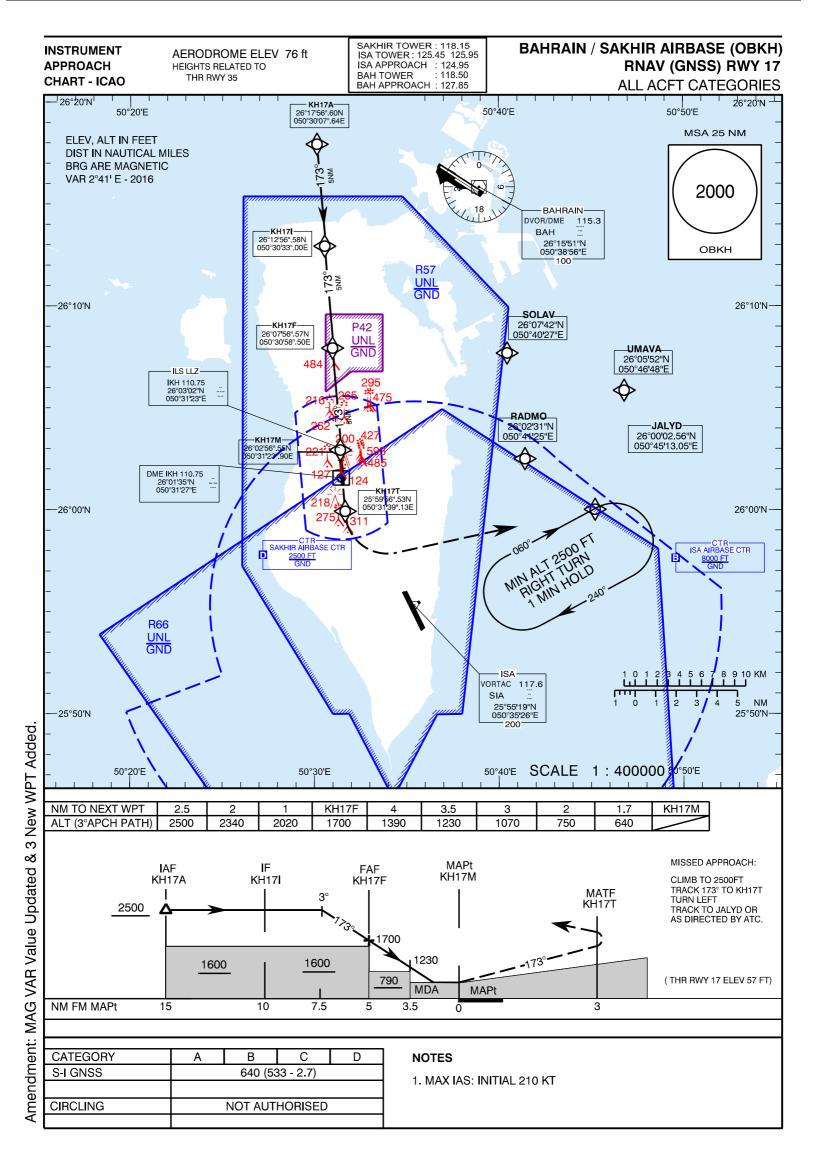


CIVIL AVIATION AFFAIRS

AIRAC AMDT 09/17

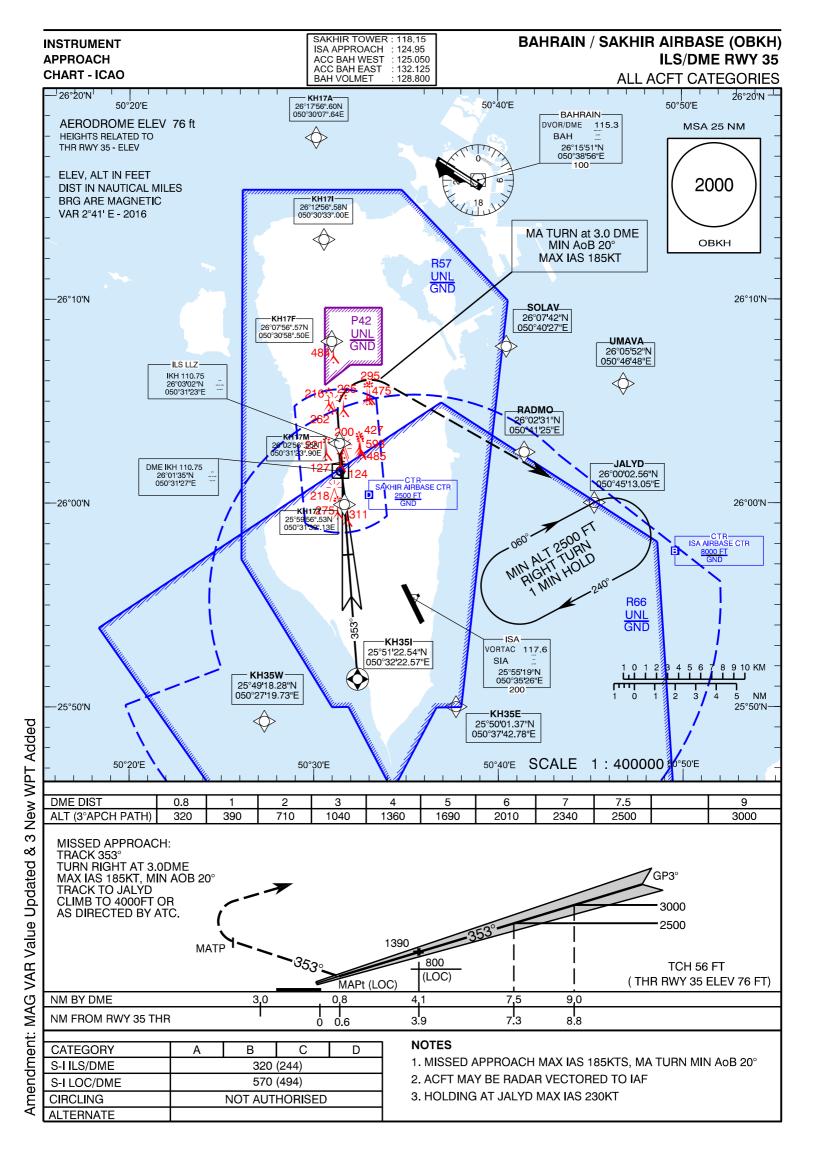


CIVIL AVIATION AFFAIRS

AIRAC AMDT 09/17

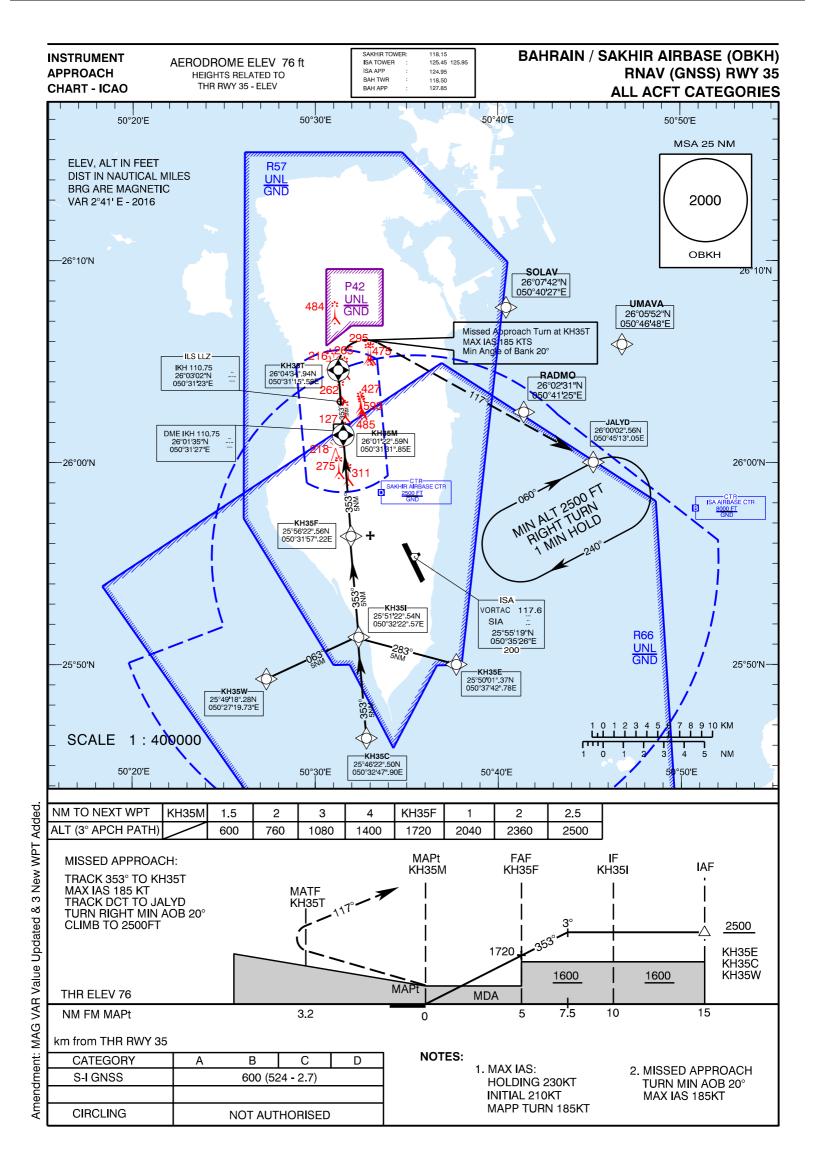

CIVIL AVIATION AFFAIRS

AIRAC AMDT 09/17

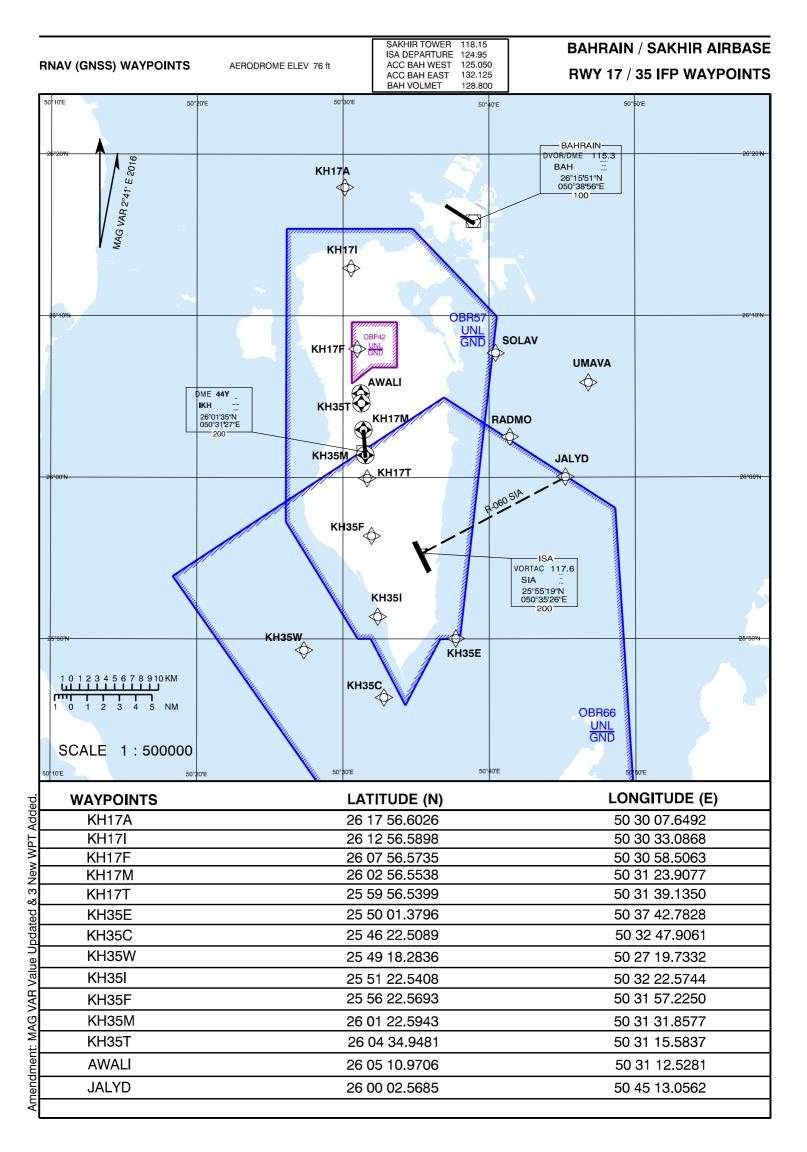

CIVIL AVIATION AFFAIRS AIRAC AMDT 09/17

AIP BAHRAIN FIR

AD 3-1
17 SEP 15

AD 3. HELIPORTS

NIL

CIVIL AVIATION AFFAIRS AIP 6th Edition 10/15

