LOW VISIBILITY PROCEDURE
LVP CHART (ARR RWY 12L/30R)

DISTANCES IN METRES
ALTITUDES, ELEVATIONS AND
HEIGHTS IN FEET.

26°16'14.97"N
050°38'01.17"E

APRON ELEV
8.92 FT

TWR 118.50
GMC 121.85
DLV 121.90

RUNWAY 12L – 30R ARRIVAL	
ARRIVAL RWY 12L	
ARRIVAL RWY 30R	
STOPBARS	

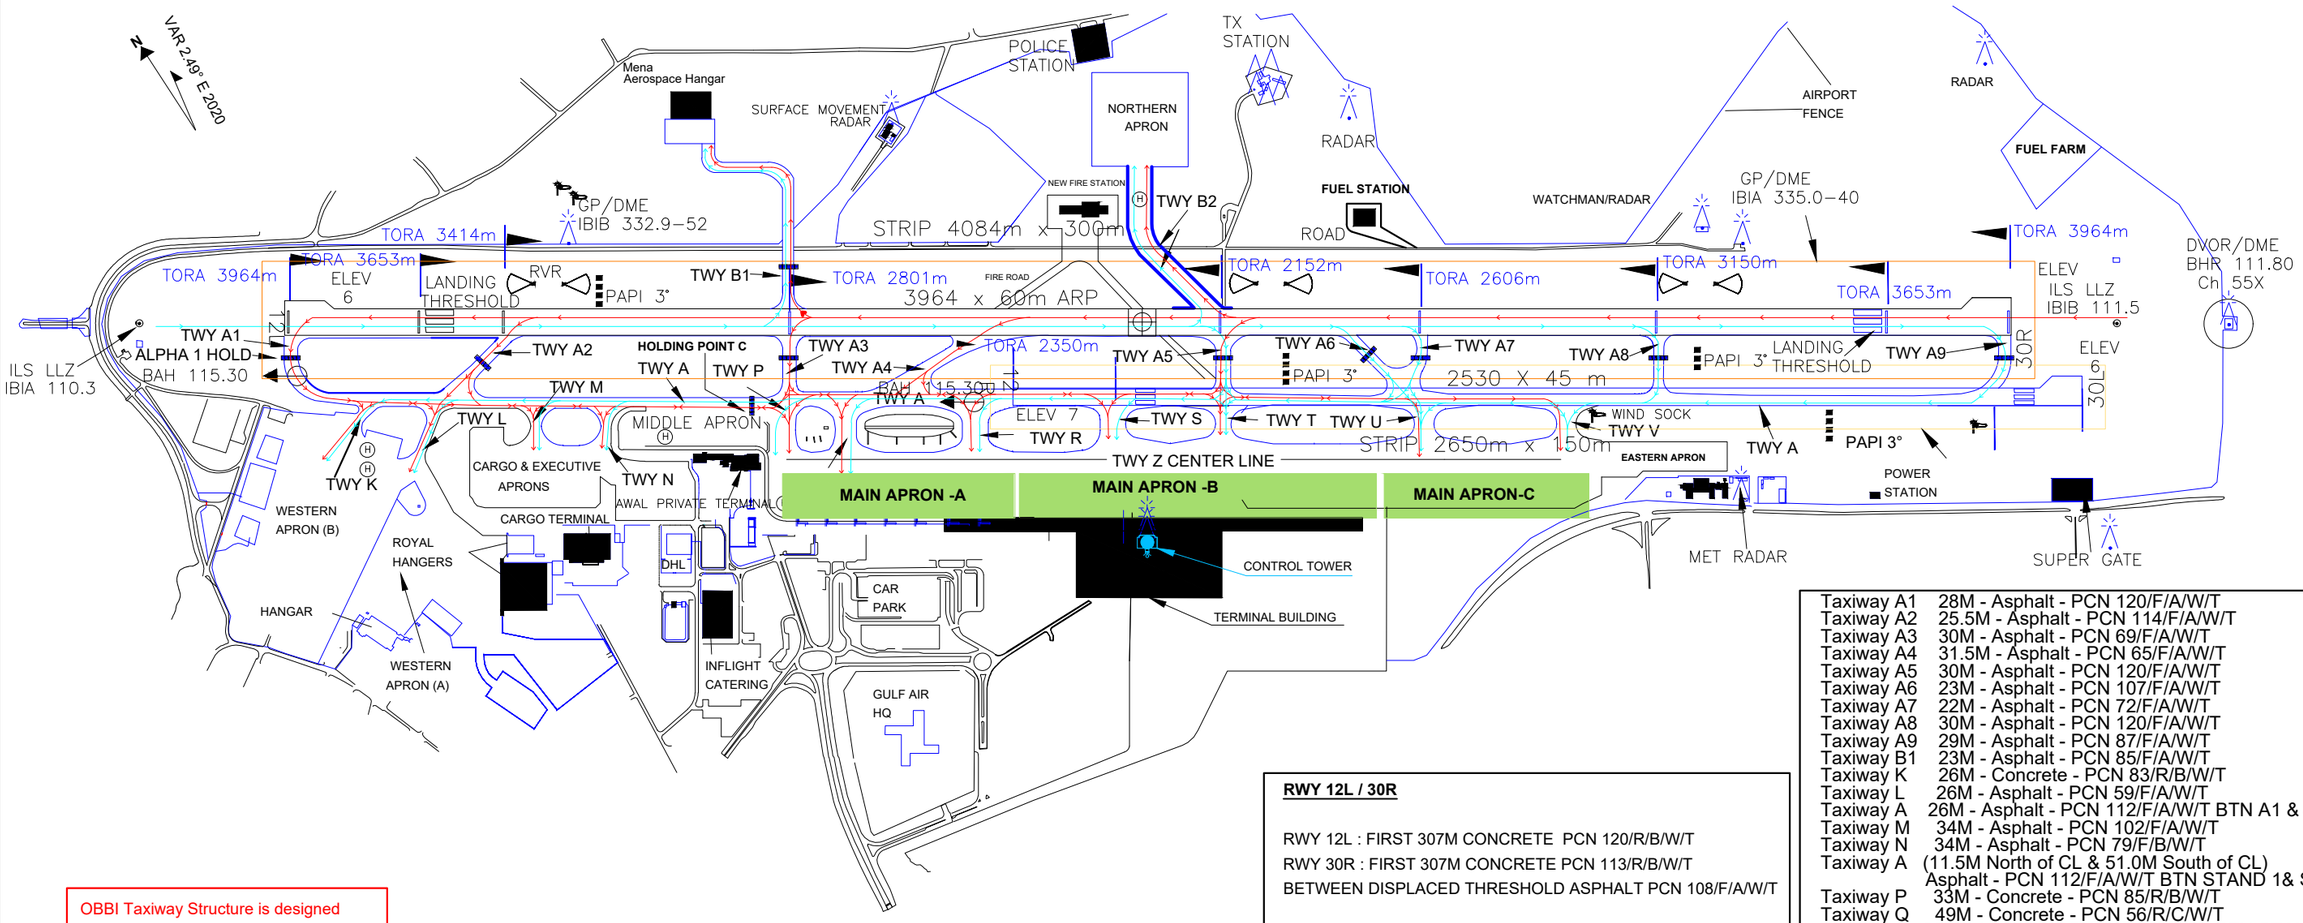

OBBI Taxiway Structure is designed such that all Taxiways are available during CAT II & Low Visibility Operations. Subject to ATC Clearance.

SCALE
metres
500 0 500

RWY 12L / 30R

RWY 12L : FIRST 307M CONCRETE PCN 120/R/B/W/T
RWY 30R : FIRST 307M CONCRETE PCN 113/R/B/W/T
BETWEEN DISPLACED THRESHOLD ASPHALT PCN 108/F/A/W/T

RWY 12R/30L

RWY 12R/30L - ASPHALT PCN 113/F/A/W/T
MAIN TAXIWAY A - 45M WIDE (BACK UP RWY 12R/30L)
R TO A9 PCN 113/F/A/W/T
MAIN TAXIWAY A - 26M WIDE PCN 113/F/A/W/T

Taxiway A1 28M - Asphalt - PCN 120/F/A/W/T
Taxiway A2 25.5M - Asphalt - PCN 114/F/A/W/T
Taxiway A3 30M - Asphalt - PCN 69/F/A/W/T
Taxiway A4 31.5M - Asphalt - PCN 65/F/A/W/T
Taxiway A5 30M - Asphalt - PCN 120/F/A/W/T
Taxiway A6 23M - Asphalt - PCN 107/F/A/W/T
Taxiway A7 22M - Asphalt - PCN 72/F/A/W/T
Taxiway A8 30M - Asphalt - PCN 120/F/A/W/T
Taxiway A9 29M - Asphalt - PCN 87/F/A/W/T
Taxiway B1 23M - Asphalt - PCN 85/F/A/W/T
Taxiway K 26M - Concrete - PCN 83/R/B/W/T
Taxiway L 26M - Asphalt - PCN 59/F/A/W/T
Taxiway A 26M - Asphalt - PCN 112/F/A/W/T BTN A1 & STAND 1
Taxiway M 34M - Asphalt - PCN 102/F/A/W/T
Taxiway N 34M - Asphalt - PCN 79/F/B/W/T
Taxiway A (11.5M North of CL & 51.0M South of CL)
Asphalt - PCN 112/F/A/W/T BTN STAND 1& STAND 6
Taxiway P 33M - Concrete - PCN 85/R/B/W/T
Taxiway Q 49M - Concrete - PCN 56/R/C/W/T
Taxiway A 30M - Asphalt - PCN 112/F/A/W/T BTN STAND 6 & S
Taxiway R 49M - Concrete - PCN 87/R/B/W/T
Taxiway S 44M - Asphalt - PCN 72/F/A/X/T
Taxiway T 42M - Asphalt - PCN 72/F/A/X/T
Taxiway U 42M - Asphalt - PCN 75/F/A/W/T
Taxiway V 42M - Asphalt - PCN 120/F/A/W/T
Taxiway B2 30M - Asphalt - PCN 84/F/A/W/T
Taxiway Z 63M - Asphalt - PCN 72/F/A/X/T BTN R& T
PCN 79/F/A/W/T BTN T&V

Amendment: MAIN APRON A OPERATIONAL .