


STANDARD ARRIVAL CHART -
INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE
13000

APP: 127.85 119.1 234.95
TWR: 118.5 296.025
SMC: 121.85
DLV: 121.90
DATIS: 127.2

BAHRAIN INTL (OBBI)
RWY 12L/30R
RADIO COMMUNICATION FAILURES STAR (RNAV1)

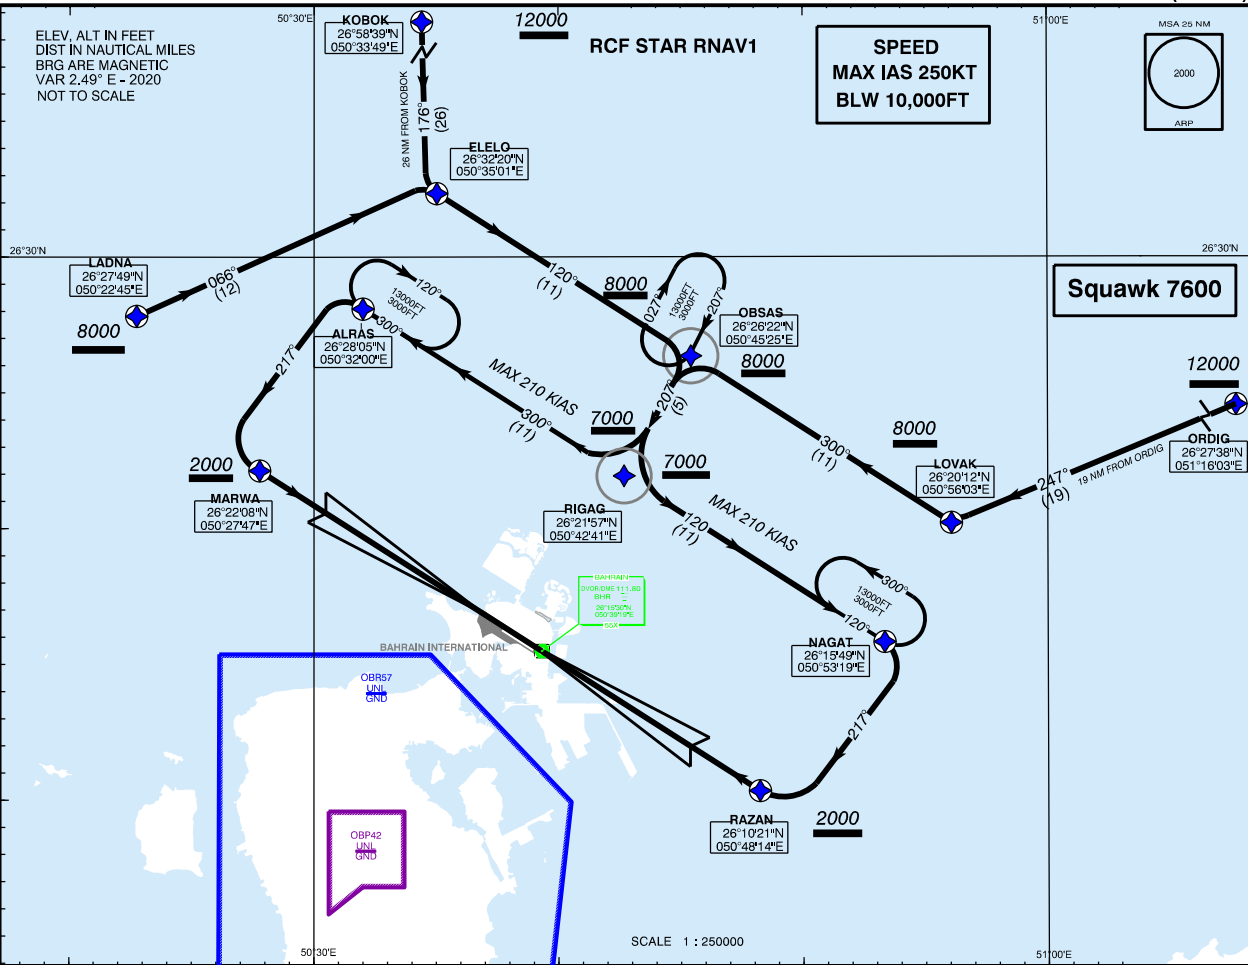

RADIO COMMUNICATION FAILURES STAR (RNAV1)

ORDIG RCF 1 ARRIVAL
LADNA RCF 1 ARRIVAL
KOBOK RCF 1 ARRIVAL

PROCEDURES

Radio Communication Failure : -

- 1- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- 2- Track via latest STAR clearance to the nominated runway, then fly the most suitable approach as advised by ATC.
- 3- Comply with all allocated flight level and altitude as published in this chart.
- 4- No Circling authorised BTN radials 180° and 260° Clockwise.

Amendment: AWY BTN ORDIG-LOVAK added.