



INSTRUMENT  
APPROACH  
CHART - ICAO

AERODROME ELEV 8 FT  
HEIGHTS RELATED TO  
THR RWY 12L ELEV 8 FT

MIN TEMP  
0°C

APP: 127.85 119.1 234.95  
TWR: 118.50 296.025  
GMC: 121.85  
DLV: 121.80  
DATIS: 127.20

BAHRAIN/Intl (OBBI)  
RNP RWY 12L  
CAT A-D(L)

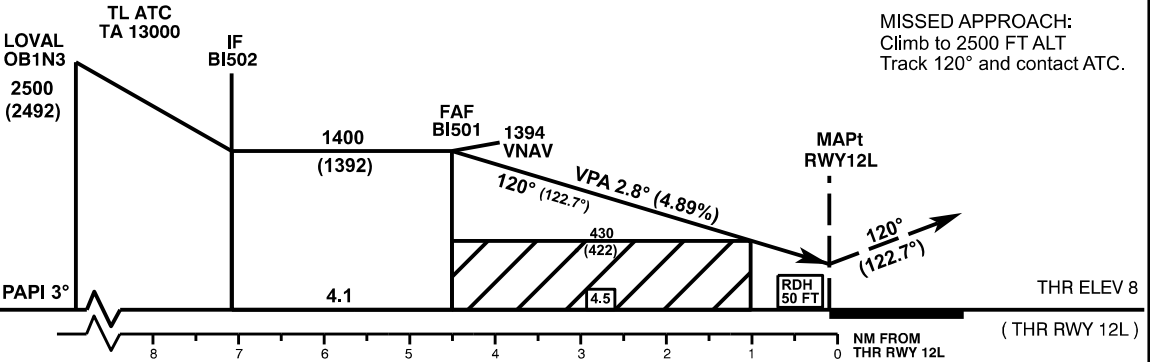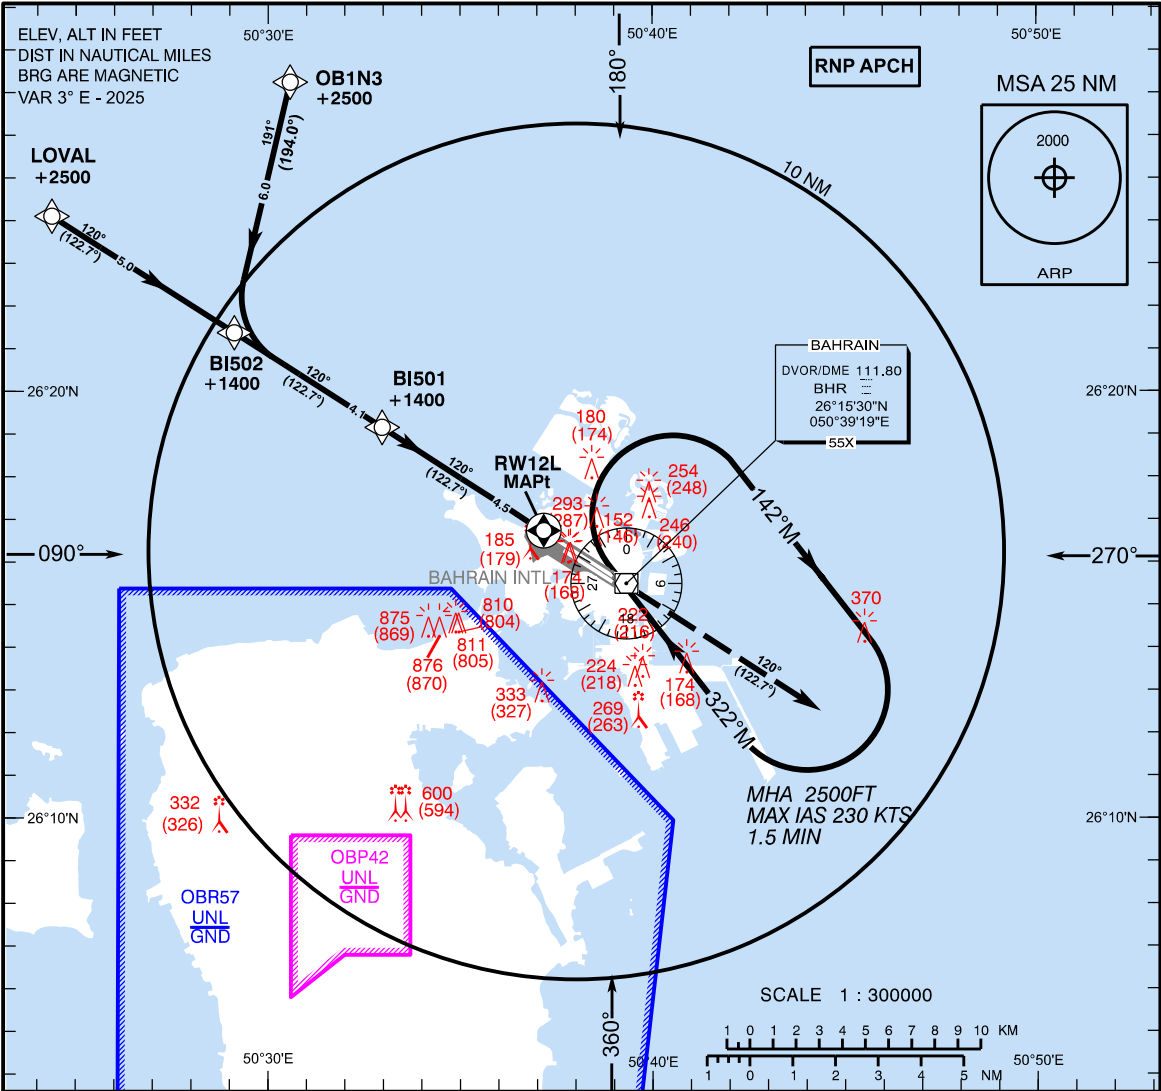

| OCA / H                 |           | A         | B         | C         | D         |
|-------------------------|-----------|-----------|-----------|-----------|-----------|
| Straight-in<br>Approach | LNAV      | 430 (422) | 430 (422) | 430 (422) | 430 (422) |
|                         | DA / H    |           |           |           |           |
|                         | LNAV/VNAV | 340 (332) | 340 (332) | 340 (332) | 340 (332) |

NOTE:  
1. At temperatures above 56°C the nominal VPA  
will exceed 3.5°.

|                        |        |     |     |     |      |      |      |
|------------------------|--------|-----|-----|-----|------|------|------|
| Distance from RWY 12L  | NM     | 1   | 2   | 3   | 4    | 5    | 6    |
| Altitude               | FT     | 355 | 650 | 950 | 1245 | 1540 | 1840 |
| Ground Speed           | KTS    | 80  | 100 | 120 | 140  | 160  |      |
| Rate of Descent (2.8°) | FT/MIN | 400 | 495 | 600 | 690  | 790  |      |

NO CIRCLING AUTHORISED  
BTN RADIALS 180° AND 260°  
CLOCKWISE.

Amendment: MAG VAR value updated.